


# SPECIFICATIONS

BARRIER MATERIAL: THERMOPLASTIC (UL 94V-0).BLACK  
 TERMINALS: TIN PLATED BRASS  
 SCREW: NICKEL PLATED STEEL  
 WIRE RANGE:18-22 STR  
 RATING: 10 AMPERES.300VAC  
 INSULATION WITHSTANDS VOLTAGE AC 2000V  
 INSULATION RESISTANCE 500M OR MORE AT DC 500V

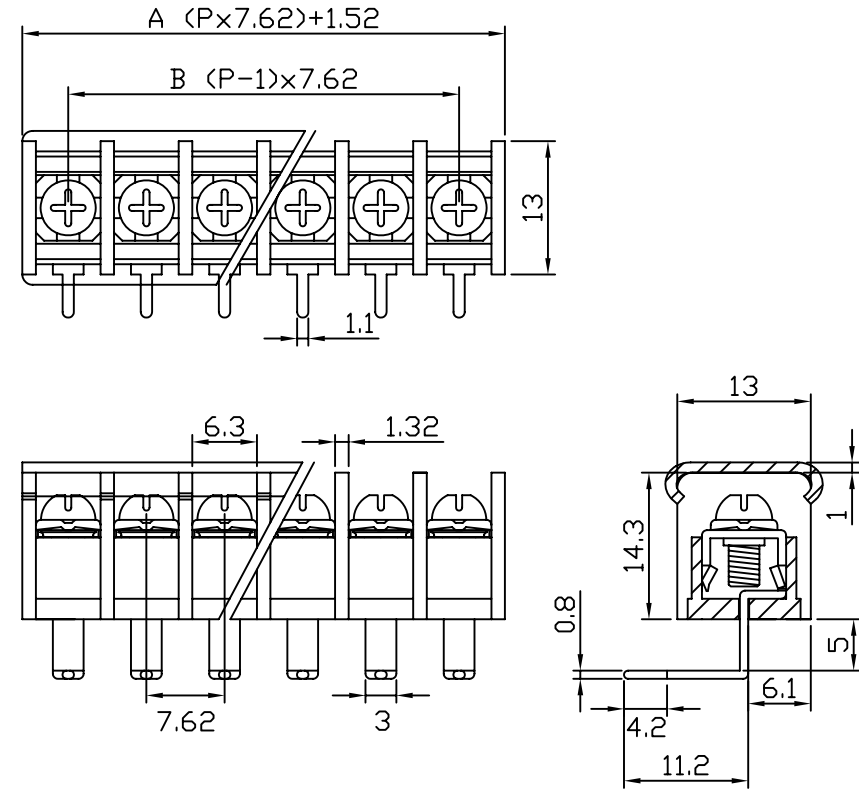

| POLE | 2      | 3      | 4      | 5      | 6      | 7      | 8      | 9      | 10     | 11     | 12     | 13    | 14    | 15    |       |       |       |
|------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|-------|
| A    | 16.76  | 24.38  | 32     | 39.62  | 47.24  | 54.86  | 62.48  | 70.1   | 77.72  | 85.34  | 92.96  | 100.6 | 108.2 | 115.8 |       |       |       |
| B    | 7.62   | 15.24  | 22.86  | 30.48  | 38.1   | 45.72  | 53.34  | 60.96  | 68.58  | 76.2   | 83.82  | 91.44 | 99.06 | 106.7 |       |       |       |
| POLE | 16     | 17     | 18     | 19     | 20     | 21     | 22     | 23     | 24     | 25     | 26     | 27    | 28    | 29    | 30    | 31    | 32    |
| A    | 123.44 | 131.06 | 138.68 | 146.3  | 153.92 | 161.54 | 169.16 | 176.78 | 184.4  | 192.02 | 199.64 | 207.3 | 241.9 | 222.5 | 230.1 | 237.7 | 245.4 |
| B    | 114.3  | 121.92 | 129.54 | 137.16 | 144.78 | 152.4  | 160.02 | 167.64 | 175.26 | 182.88 | 190.5  | 198.1 | 205.7 | 213.4 | 221   | 228.6 | 236.2 |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±



ORDER INFORMATION

TBB076-RC-xx-LF

SERIES

LEADFREE

02~32WAY

CAP

DIP 90°

DESCRIPTION: Barrier type terminal block