
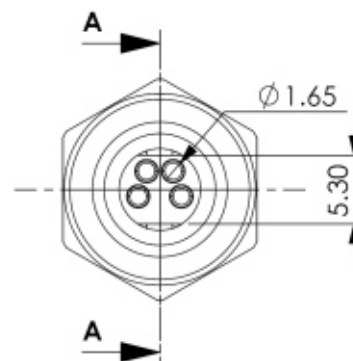
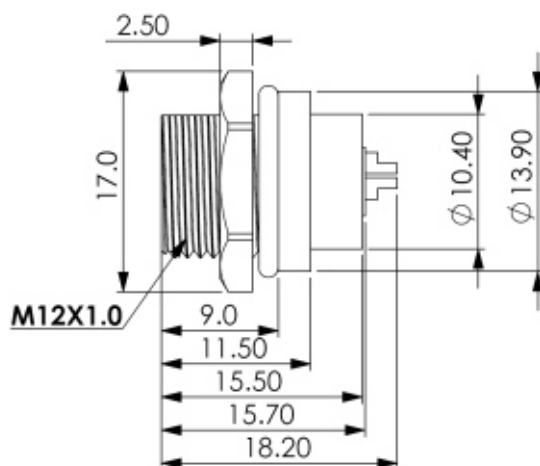
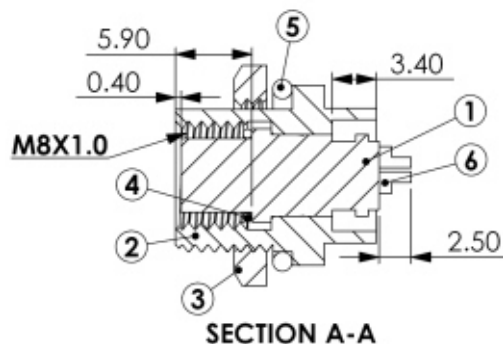


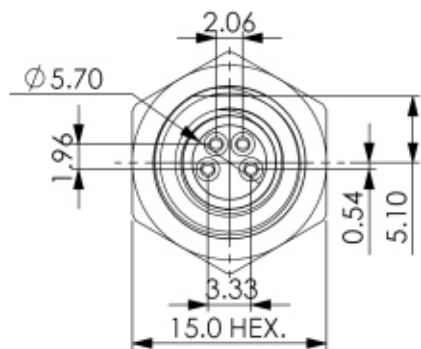

No.	Description	Material	Treat	Q'ty
1	Housing	Thermoplastic	UL94V-0 Black	1
2	Shield Cover	Brass	Nickel Ptd.	1
3	Screw Nut	Brass	Nickel Ptd.	1
4	Sealed Ring	NBR	Black	1
5	O-Ring	NBR	Black	1
6	Terminals	Brass	Gold Ptd.	4

SPECIFICATION :
CURRENT : 2A
OPERATING TEMPERATURE : -20°C TO 105°C
INSULATION RESISTANCE : 1000MΩ min.
DIELECTRIC STRENGTH : 500V AC min.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

M8-SSPBNO-04-LF
 SERIES | RING | NUT | PANEL BACK | SOLDER
 FEMALE | 04WAY | LEADFREE

DESCRIPTION: