



SPECIFICATIONS

Electrical

Current Rating: 1A AC, DC
 Voltage Rating: 50V AC/ max.
 Operating Temp.: -25°C ~ +85°C
 Insulation Resistance: 500MΩ/ min.
 Dielectric Withstanding Voltage: 500V AC/ min.
 Contact Resistance: 20MΩ/ max.

Material

Material: PBT, UL94V-0

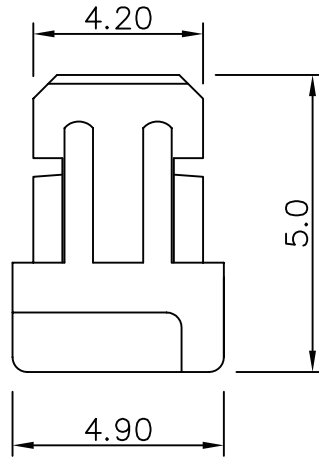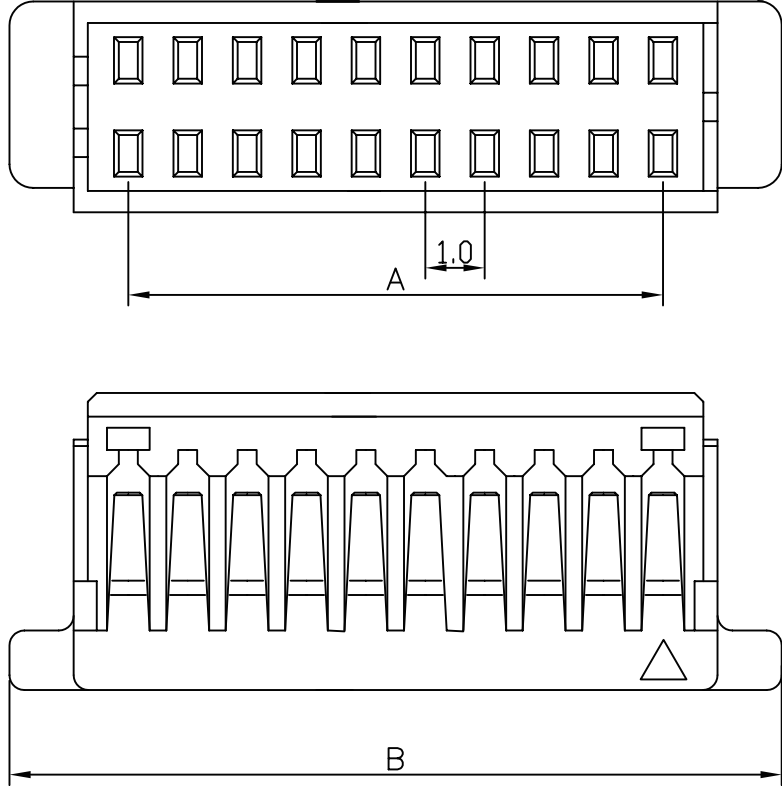

Poles	Dimension mm		Part No.	Note.
	A	B		
20	9.00	13.00	SHD-H-20	
30	14.00	18.00	SHD-H-30	
40	19.00	23.00	SHD-H-40	
50	24.00	28.00	SHD-H-50	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm


SCALE 1:1

DATE


SIZE A4

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

P PROJECTION



ORDER INFORMATION

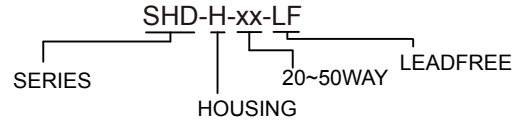

DESCRIPTION: 1.00mm Wire-to-Board Housing