

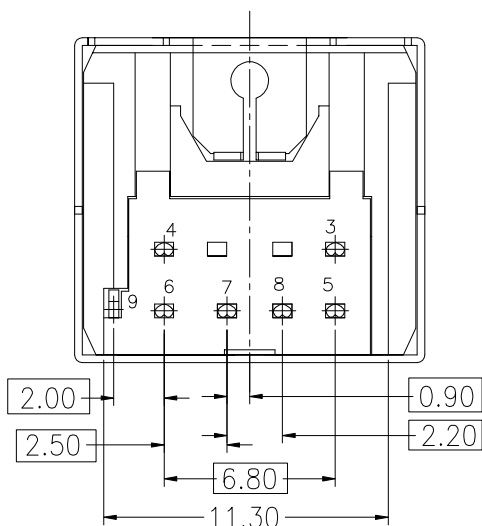
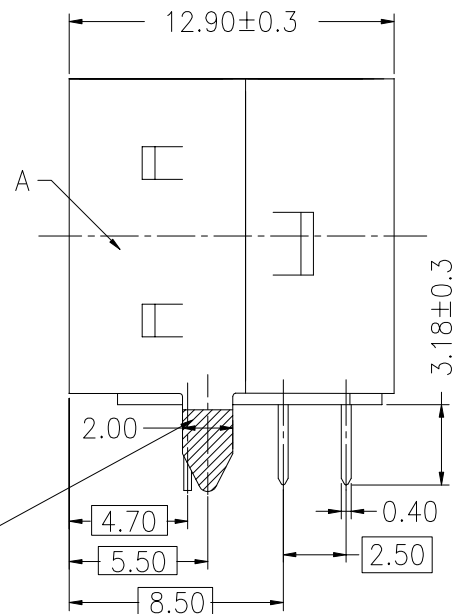


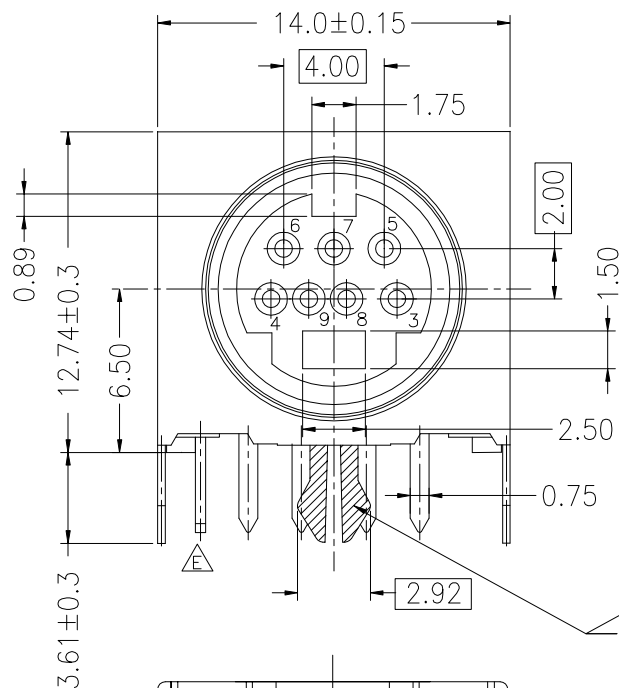

MATERIAL
 INSULATOR: LCP OR PBT UL94V-0
 CONTACT: Brass, Gold/Tin plated
 SHELL: Brass/Spcc, Tin plated or Nickel plated
 ENVIRONMENTAL
 OPERATING TEMPERATURE: -55°C~105°C
 ELECTRICAL
 CONTACT CURRENT RATING: 1 Amp
 DIELECTRIC WITHSTANDING : AC 1000V/min.R.M.S.
 INSULATION RESISTANCE: 500M Ω min.at 500V DC
 CONTACT RESISTANCE: 30m Ω Max

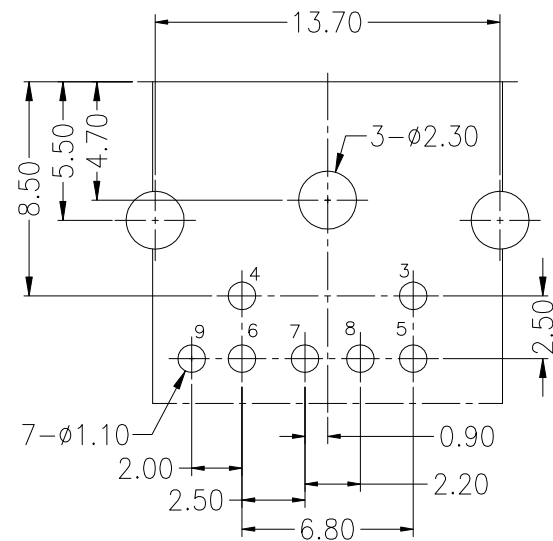

P.C.B. LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
 .X, $\pm$
 .XX, $\pm$
 .XXX, $\pm$
 ANG, $\pm$



ORDER INFORMATION

MDJ-F-07B-LF
 SERIES | LEADFREE
 B KEY
 07 WAY
 FULL METAL

DESCRIPTION: 迷你單層特殊型7P母半金黑 (銅殼鍍錫無嘜不加彈) RoHS