





01P

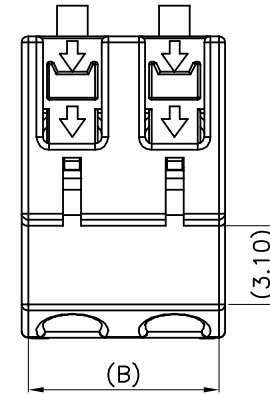



02P

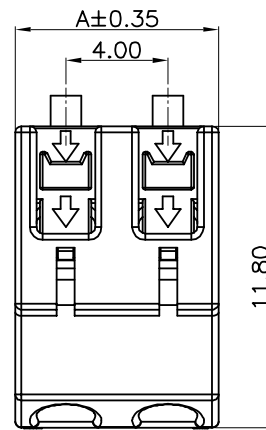


PICK AND PLACE AREA

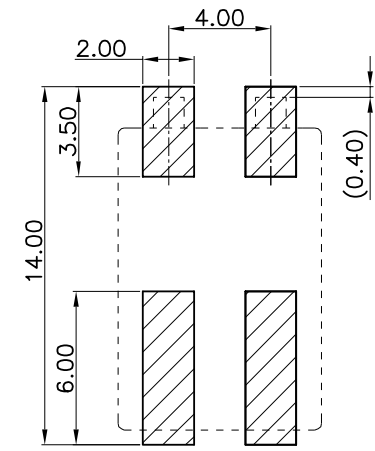

TOLERANCE: ± 0.05
RECOMMENDED P.C.B. Layout
TOP VIEW



CAV. NO.

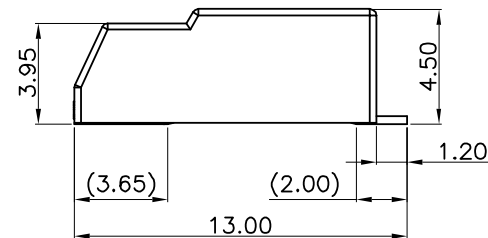

NOTES:

- MATERIAL:
INSULATION(HALOGEN FREE): LCP, UL94V-0 (CREAM)
COVER(HALOGEN FREE): LCP, UL94V-0 (CREAM)
CONTACT: COPPER ALLOY, $t=0.30\text{mm}$
- CONTACT FINISH: TIN PLATED OVER NICKEL
- APPLICABLE WIRE RANGE:
(OUTSIDE WIRE INSULATION: 2.1mm DIAMETER MAX)
SOLID WIRE: AWG#24~#18
STRAND WIRE: AWG#22~#20

PIN	DIM.(mm)	
	A	B
01	3.95	3.45
02	7.95	7.45

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
X ± 0.35
XX ± 0.25
XXX $\pm$
ANG $\pm 3^\circ$




ORDER INFORMATION

TBX040-W04R-xx-LF

SERIES

LEADFREE
01~02 WAY
REEL
HIGH 4.5mm
90°SMT

DESCRIPTION: WIRE TO BOARD, PITCH 4.00mm, RIGHT ANGLE SMT TYPE, ASSEMBLY

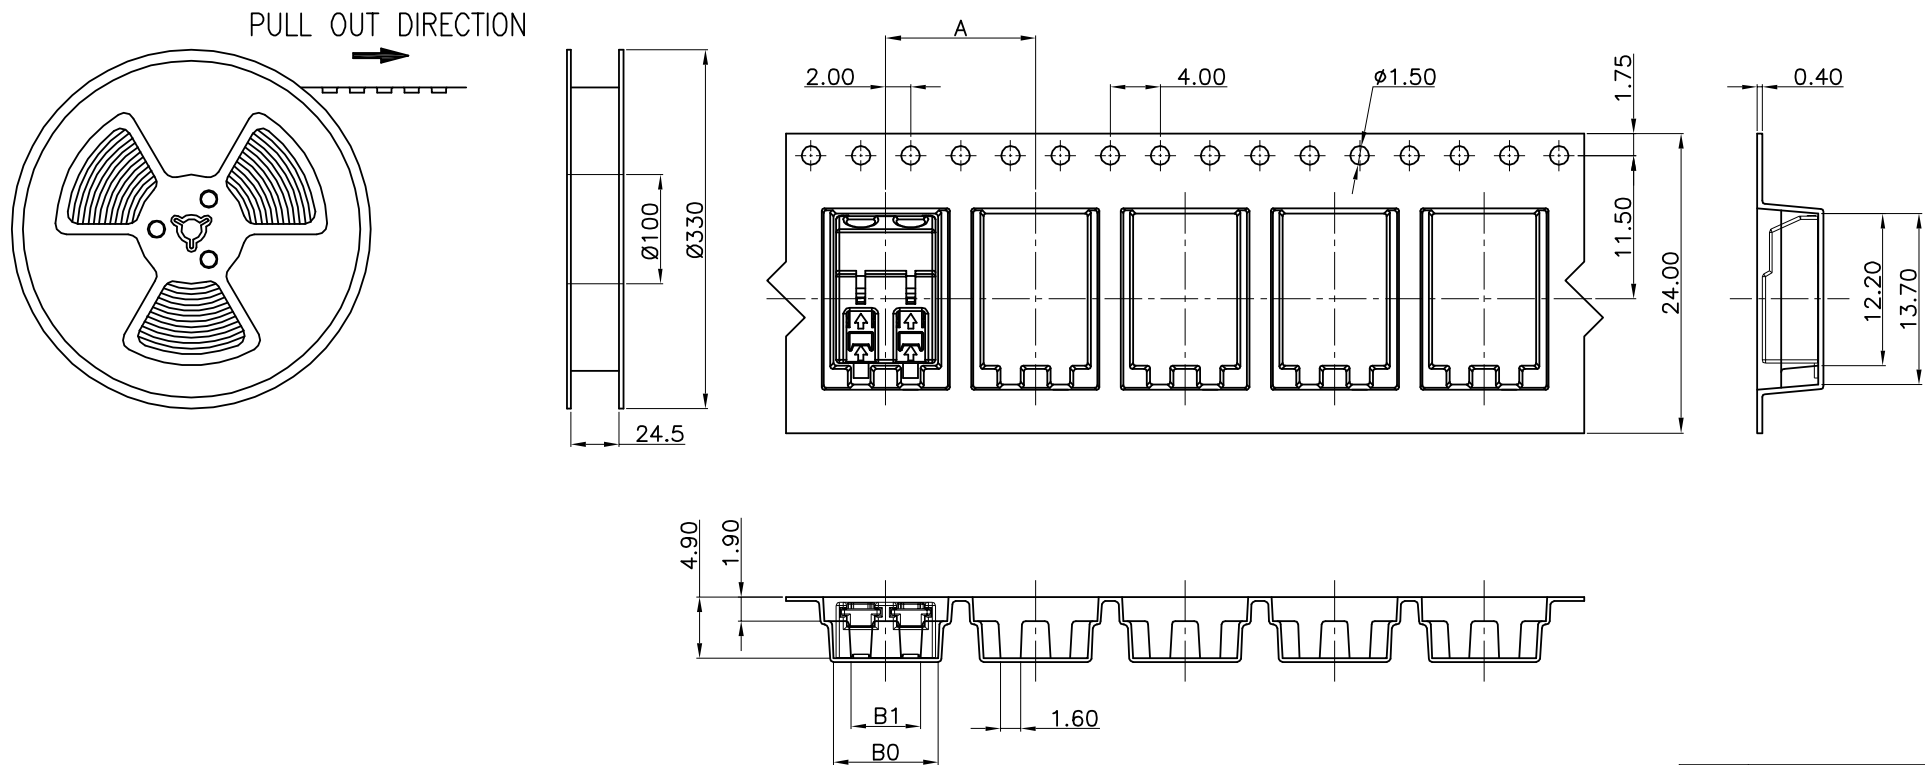

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.20
2. CARRIER CAMBER IS WITHIN 1 mm IN 250 mm
3. MATERIAL : BLACK CONDUCTIVE POLYSTYRENE ALLOY.(UP-5000)
4. ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS
5. THICKNESS : 0.40 ± 0.05 mm
6. COMPONENT LOAD PER 13" REEL : 01P 1500 PCS
02P 1000 PCS

PIN	DIM.(mm)		
	A	B0	B1
01	8.00	4.35	1.60
02	12.00	8.35	5.60

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
X, $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION



ORDER INFORMATION



TBX040-W04R-xx-LF

SERIES

LEADFREE
01~02 WAY
REEL
HIGH 4.5mm
90°SMT

DESCRIPTION:


PARTITION BOARD 2 PCS




PROTECT TAPE



INNER BAG




TRIANGLE BOARD 4 PCS

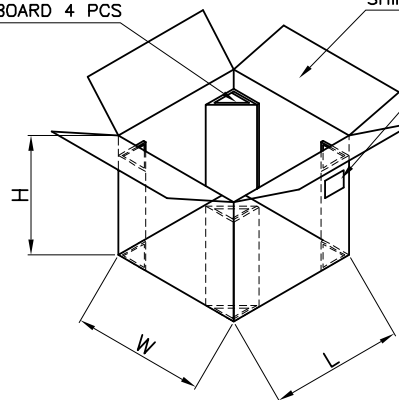

SHIPPING CARTON

TABEL



PACKING MATERIAL

PART NAME	DIM.(mm)
REEL	ø330*(W+0.5)
CARTON	350*350*340

PACKING CAPACITY

PIN	PCS/RE	RE/BC	PCS/BC
01	1,500	10	15,000
02	1,000	10	10,000

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

TBX040-W04R-xx-LF

SERIES

LEADFREE
01~02 WAY
REEL
HIGH 4.5mm
90°SMT

DESCRIPTION: WIRE TO BOARD, PITCH 4.00mm, RIGHT ANGLE SMT TYPE, ASSEMBLY