

MATERIAL

HOUSING : NYLON 6T,UL94V-0

CONTACT : COPPER ALLOYS

PLATED : GOLD-FLASH

COLOR : BLACK

SPECIFICATION



CURRENT: 1A

OPERATING TEMPERATURE: -40°C TO +105°C



CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 5000 MEGAOHMS MIN

WITHSTAND VOLTAGE : 500 V AC MIN

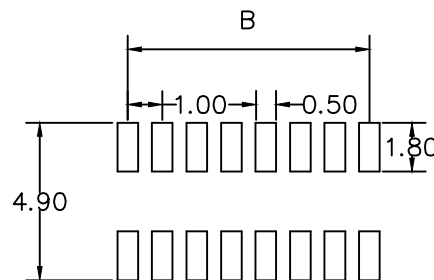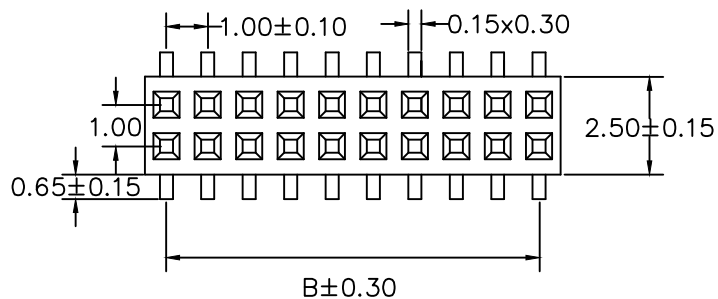

P. C. B. LAYOUT

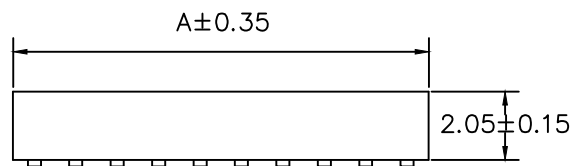

Number Of Position	DIMENSIONS	
	A	B
06	03.40	02.00
08	04.40	03.00
10	05.40	04.00
12	06.40	05.00
14	07.40	06.00
16	08.40	07.00
18	09.40	08.00
20	10.40	09.00
22	11.40	10.00
24	12.40	11.00
26	13.40	12.00
28	14.40	13.00
30	15.40	14.00
32	16.40	15.00
34	17.40	16.00
36	18.40	17.00
38	19.40	18.00
40	20.40	19.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ± 5°



ORDER INFORMATION

F10-V22X-2Xxx-LF
SERIES | LEADFREE
2X03:06WAY
2X20:40WAY
NON POST
HIGH 2.25mm
180° SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: FEMALE 1.00 SMT H:2.25