



No. of Contacts	DIMENSIONS		REMARK (註)
	A	B	
6	2.00	3.00	○
8	3.00	4.00	○
10	4.00	5.00	○
12	5.00	6.00	○
14	6.00	7.00	○
16	7.00	8.00	○
18	8.00	9.00	○
20	9.00	10.00	○
22	10.00	11.00	○
24	11.00	12.00	○
26	12.00	13.00	○
28	13.00	14.00	○
30	14.00	15.00	○
32	15.00	16.00	○
34	16.00	17.00	○
36	17.00	18.00	○
38	18.00	19.00	○
40	19.00	20.00	○
42	20.00	21.00	○
44	21.00	22.00	○
46	22.00	23.00	○
48	23.00	24.00	○
50	24.00	25.00	○
52	25.00	26.00	○
54	26.00	27.00	○
56	27.00	28.00	○
58	28.00	29.00	○
60	29.00	30.00	○
62	30.00	31.00	○
64	31.00	32.00	○
66	32.00	33.00	○
68	33.00	34.00	○
70	34.00	35.00	○
72	35.00	36.00	○
74	36.00	37.00	○
76	37.00	38.00	○
78	38.00	39.00	○
80	39.00	40.00	○
82	40.00	41.00	○
84	41.00	42.00	○
86	42.00	43.00	○
88	43.00	44.00	○
90	44.00	45.00	○
92	45.00	46.00	○
94	46.00	47.00	○
96	47.00	48.00	○
98	48.00	49.00	○
100	49.00	50.00	○

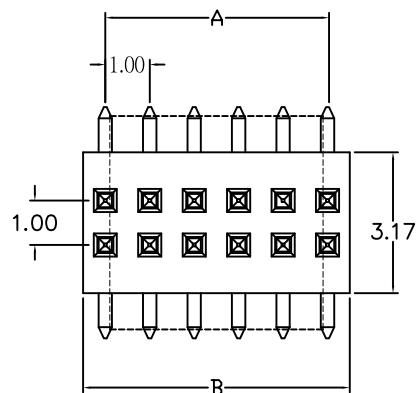



Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

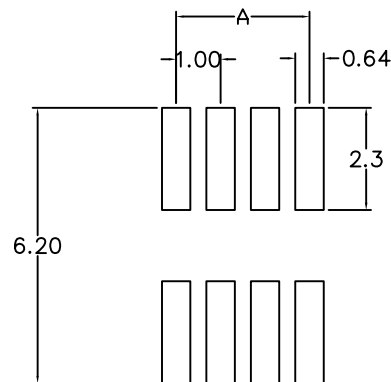

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: $-40^{\circ}\sim+105^{\circ}\text{C}$
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Copper alloy
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 (L.C.P.)
 Color: Black

Finish: Tin, Gold plated
 ◎ Standard: Gold flash all over

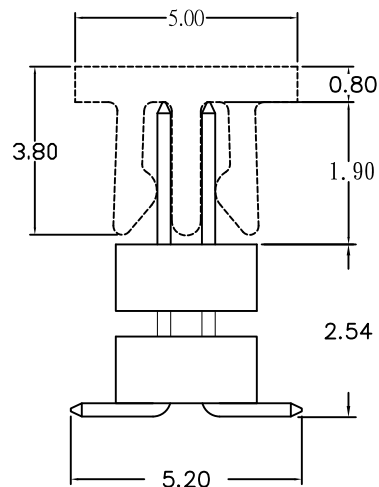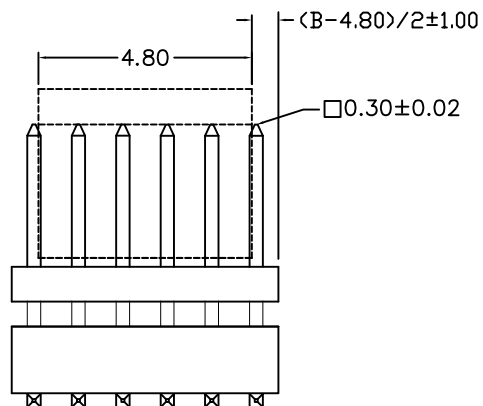

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X, $\pm$

CHECKED BY GENIUS

X, $\pm$

UNIT / mm

SCALE 1 : 1


.XXX $\pm$

DATE

ANG $\pm$

SIZE A4

PPOJECTION



ORDER INFORMATION

H10S-V025X19C-2Xxx-LF
 SERIES CONTACT CAP LEADFREE
 180° SMT 19:1.9mm NON POST HIGH 2.54mm
 2X02:04WAY
 2X50:100WAY

DESCRIPTION: 1.0X1.0mm SMD HEADER

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com