


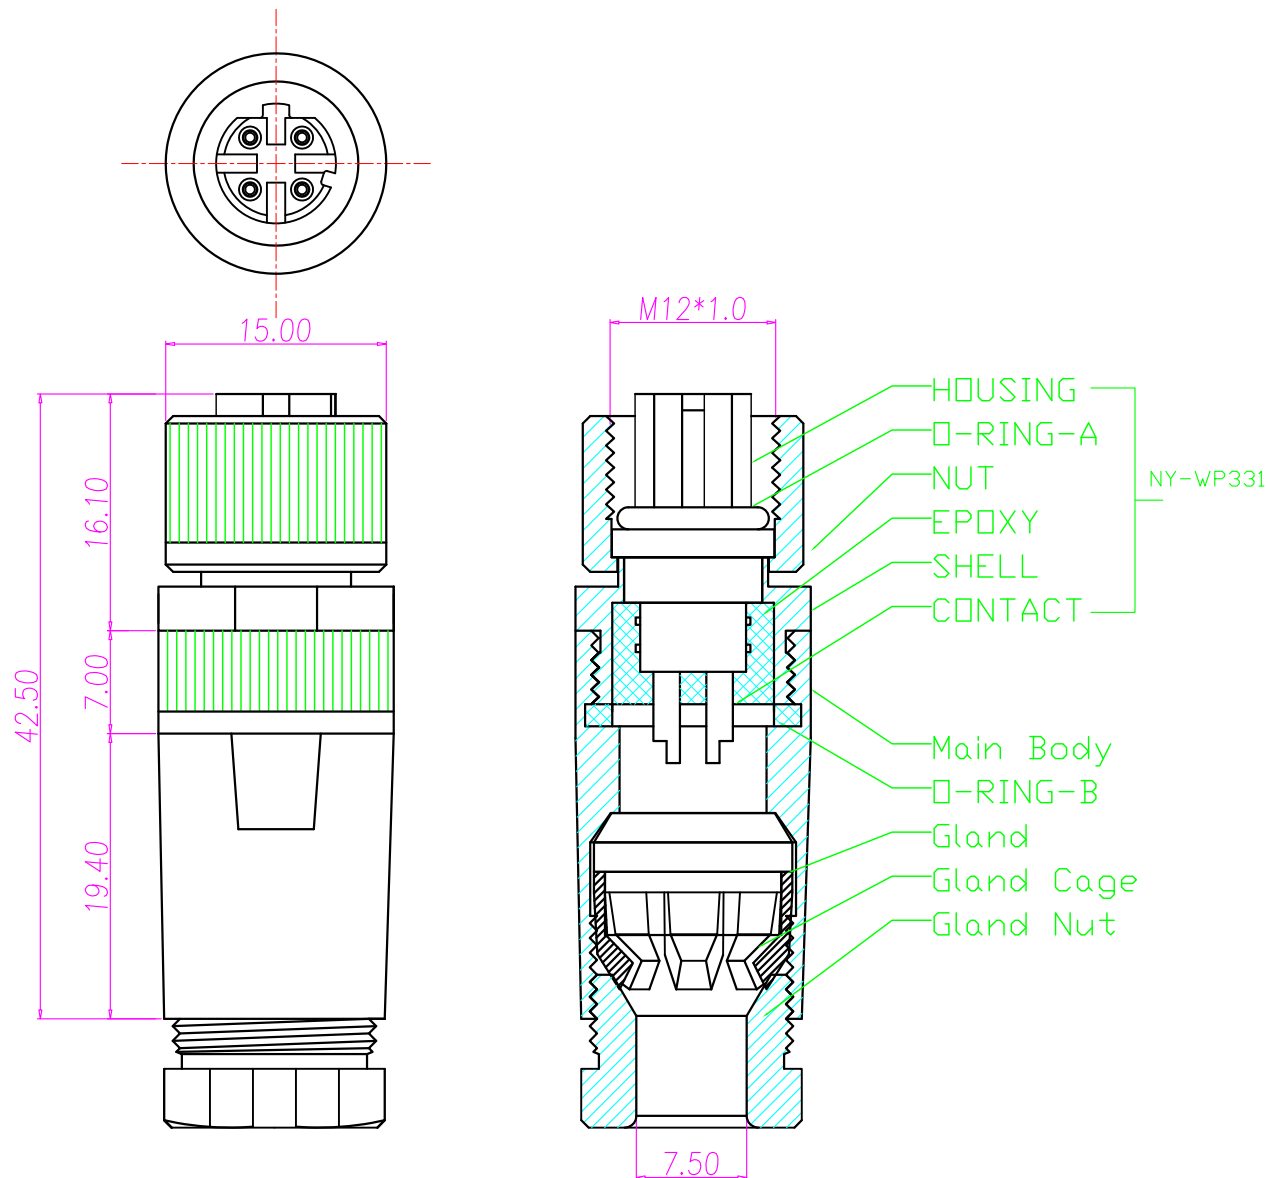

1. MATERIAL :

1-1. NY-WP331 :

- a. HOUSING : PBT UL94V-0 ; COLOR : BLACK.
- b. CONTACT : BRASS
- c. NUT : ALUMINUM ALLOY
- d. SHELL : ALUMINUM ALLOY
- e. O-RING : EPDM ; COLOR : BLACK
- f. Epoxy Base : EF400A&EF400B. COLOR : BLACK.

1-2. Main Body : ALUMINUM ALLOY

1-3. Gland : SILICONE COLOR : BLACK.

1-4. Gland Cage : POM ; COLOR : BLACK.

1-5. Gland Nut : Brass.

2. FINISH :

2-1. NY-WP331 :

- a. CONTACT : GOLD FLASH MICRO INCHES MIN. UNDER PLATE : NICKEL.
- b. NUT : SATIN Ni PLATED.
- c. SHELL : SATIN Ni PLATED.

2-2. Main Body : SATIN Ni PLATED.

2-3. Gland Nut : SATIN Ni PLATED.

3. ELECTRICAL SPECIFICATION :

3-1. Rated current : 5A

3-2. Rated Voltage : 125V

3-3. Water proof : IPX7

4. Environmental :

4-1. Operation Temperature : -20 ℃~85℃

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ±



ORDER INFORMATION

M12-SA-04D-LF
SERIES | | | LEADFREE
| | | D KEY
| | | 04 WAY
| | | ASSEMBLY
| | | FEMALE

DESCRIPTION: M12 4PIN(F) D-coded Assembly type