




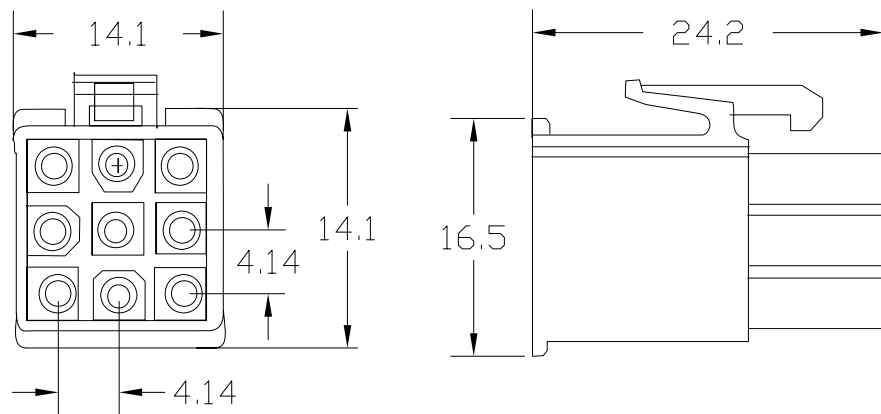

Pcs/1bag ML-S-3X03
1000

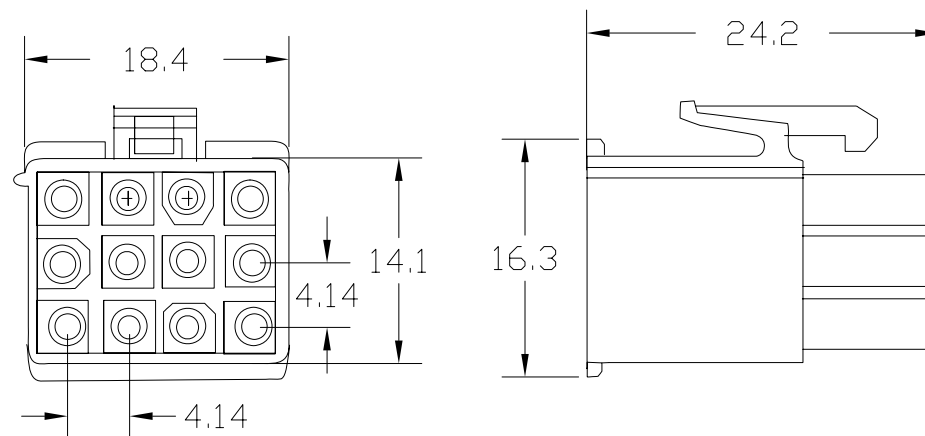

Pcs/1bag ML-S-3X04
500

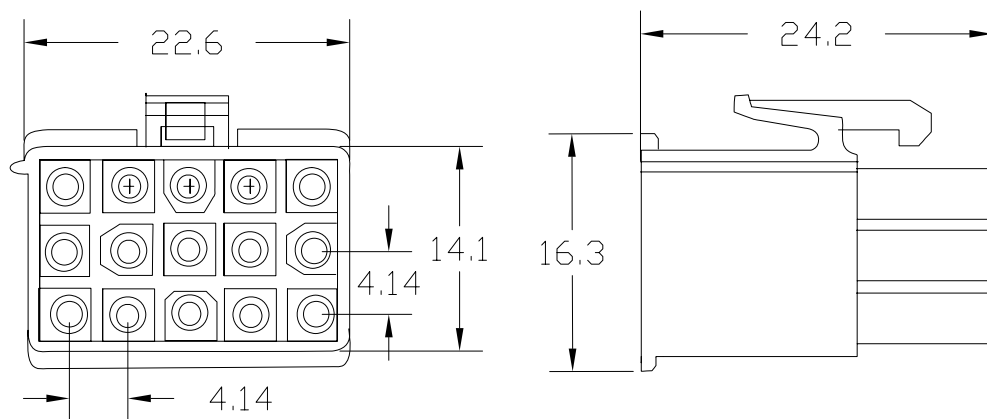

Pcs/1bag ML-S-3X05
500

SPECIFICATIONS

Voltage rating:300V AC,DC

Current rating:5A AC,DC

Withstanding voltage:1500V AC/minute

Insulation resistance:1000MΩHM min

Temperature range:-25°C~+90°C

Material:UL94V-2 Nylon 66

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±


.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION



ORDER INFORMATION

ML-S-3Xxx-LF
SERIES | LEADFREE
3X03:09 WAY
3X05:15 WAY
FEMALE HOUSING

DESCRIPTION: