


Specifications

Current Rating: 3Amp  
 Insulation Resistance: 1000MΩMin.  
 Dielectric Withstanding Voltage: 600VAC  
 Contact Resistance: 20mΩMax.  
 Operating Temperature: -40°C to +105°C  
 Materials  
 Contact Material: Phosphor Bronze  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon 6T (Halogen Free) or the equivalent material

Recommended P.C.Board Bottom Entry Layout

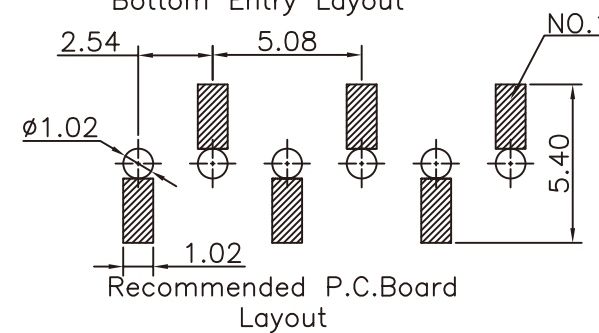

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS


UNIT / mm SCALE 1 : 1

DATE


SIZE A4

X. ± 0.30  
 .X ± 0.25  
 .XX ± 0.15  
 .XXX ± 0.10  
 ANG ±

P PROJECTION



ORDER INFORMATION

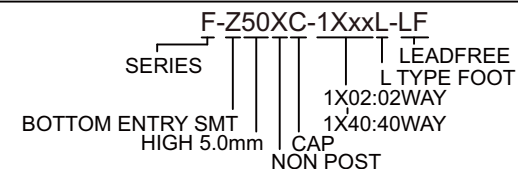

DESCRIPTION: 2.54 FEMALE HEADER SINGLE ROW SMT TYPE CONNECTOR