
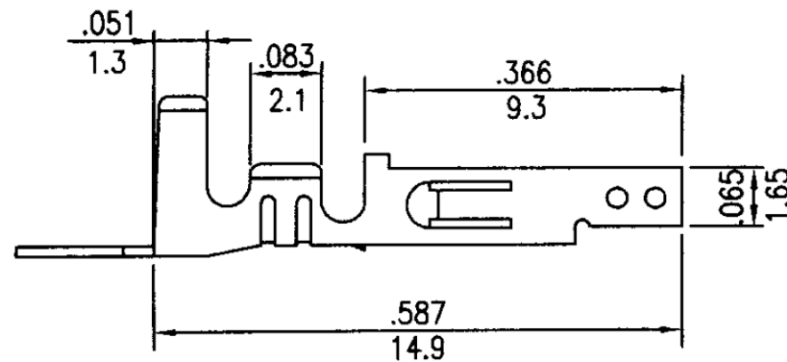


- * Material:Brass
- * Finished:Tin-plated
- * Insulation O.D:2.80mm(max)
- * Thickness:0.20mm
- * Q'TY:5,000pcs/reel

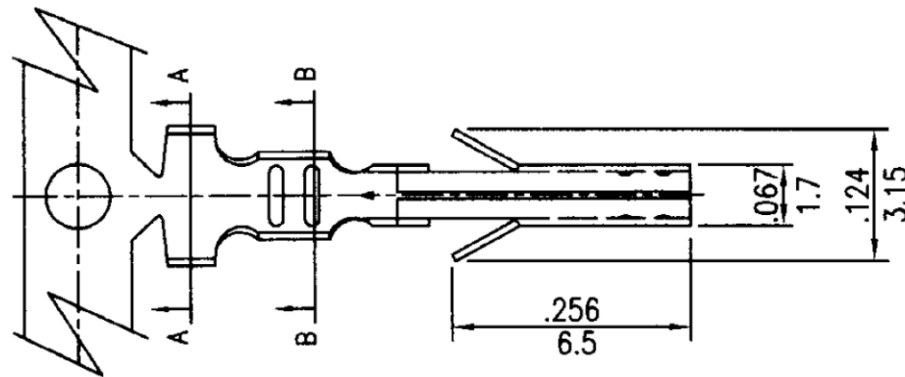


inches
mm

$$H = \frac{.173}{4.4}$$


$$L = \frac{.138}{3.5}$$

$$H = \frac{.153}{3.9}$$

$$L = \frac{.130}{3.3}$$




A-A SECTION



$$H = \frac{.075}{1.9}$$

$$L = \frac{.071}{1.8}$$

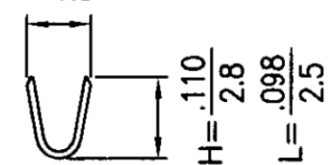

B-B SECTION

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MF-FT-xx-LF
SERIES
LEADFREE
16:16~18AWG
18:18~22AWG
TERMINAL
FEMALE

DESCRIPTION: 4.20mm Pitch Terminal