


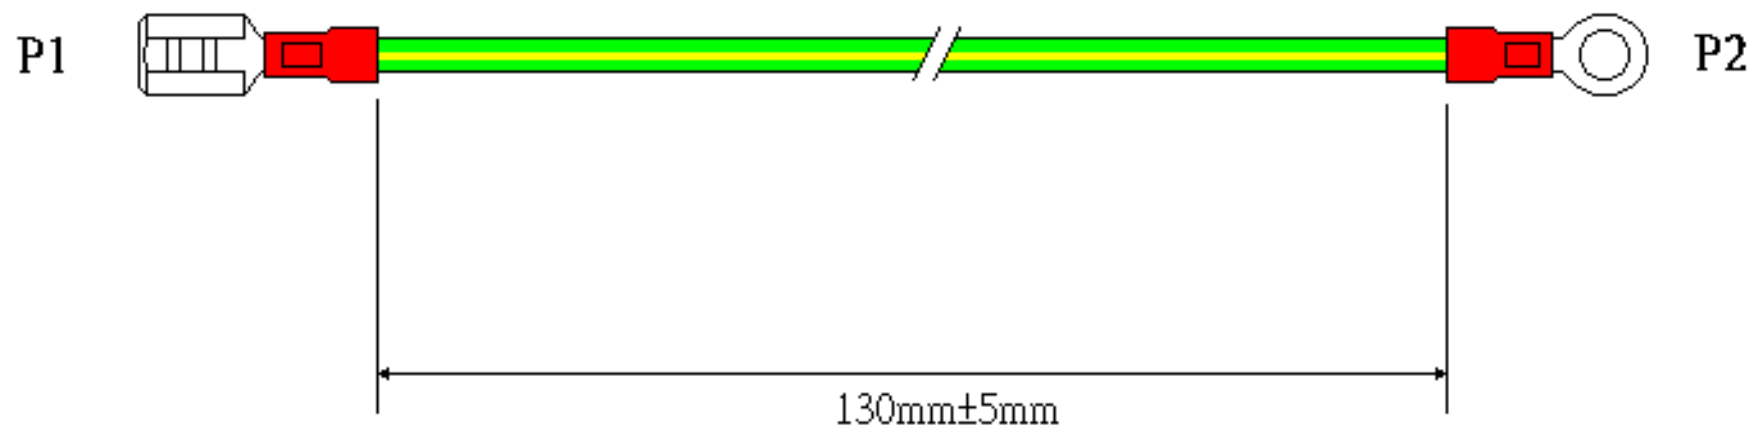

1. P1 : .250×.0.32 (6.3×0.8) FEMALE DISCONNECTOR VINYL INSULATED COLOR=RED
2. P2 : RING TERMINAL Ø3.2mm VINYL INSULATED COLOR=RED
3. WIRE IS UL(1007) 18AWG 80°C 300V PVC JACKET COLOR=GREEN/YELLOW

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

QTRT-6832V18-F13C-LF

SERIES

6.3X0.8

PVC
3.2mm

18 AWG

130mm

FEMALE TO FEMALE

LEADFREE

DESCRIPTION: