
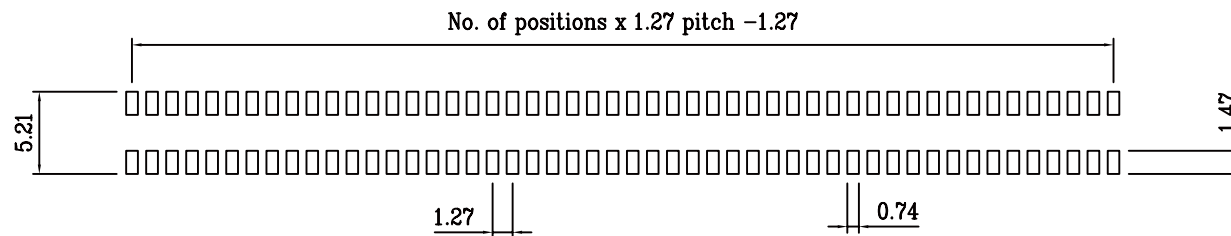



## SPECIFICATIONS

- \* Current Rating : 1 Amps
- \* Insulator resistance: 5000 Megohms min.
- \* Dielectric withstanding: AC 500 V
- \* Operating Temperature:  $-40^{\circ}$ ~ $+105^{\circ}$ C
- \* Max Processing Temp:  $230^{\circ}$  for 30~60 seconds  
( $260^{\circ}$  for 10 seconds)
- \* Contact Material: Phosphor bronze
- \* Housing: L.C.P (UL 94 V-0)

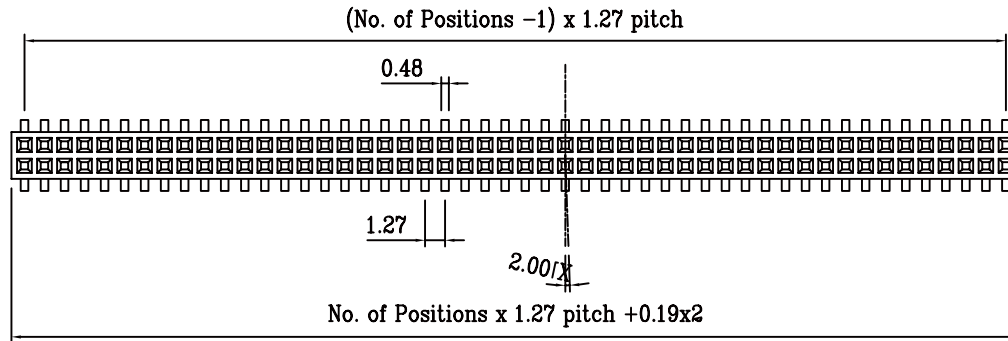

Recommended P.C.B. Layout

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

**RoHS Compliant**

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4


TOLERANCES ARE

X,  $\pm$   
.X  $\pm$  0.15  
.XX  $\pm$  0.10  
.XXX  $\pm$  0.05  
ANG  $\pm$

PPOJECTION



**ORDER INFORMATION**

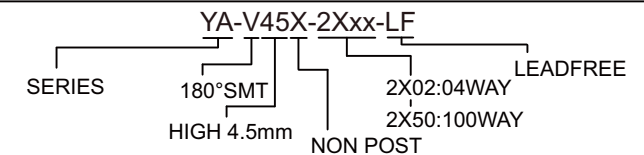

DESCRIPTION: Dual Row 1.27x1.27 SMD Female