




NOTES:

1.MATERIAL

- 1.1 Insulator:PBT+30%Glass Fiber (UL94V-0)
- 1.2 Contact:Brass
- 1.3 Contact Plated:Gold
- 1.4 Shell:Steel,Nickel Plated
- 1.5 Screw: Brass ,Nickel Plated

2.SPECIFICATIUN

- 2.1 Current Rate:5 Amps
- 2.2 Insulator Resistance:5000MW Min. at 500V DC
- 2.3 Dielectric Strength:1000V Per minute
- 2.4 Uperation Temperature:-55°C to+105°C

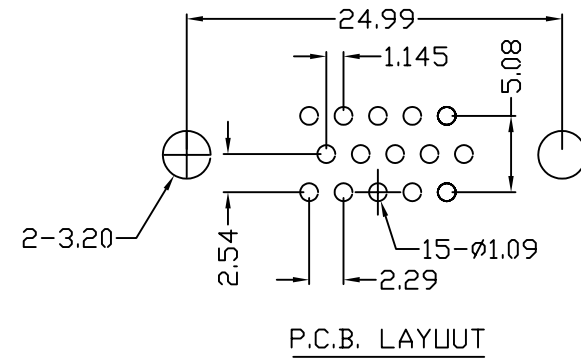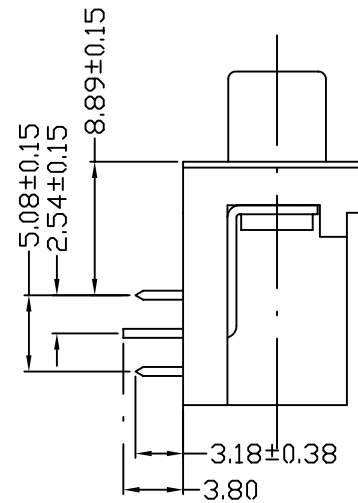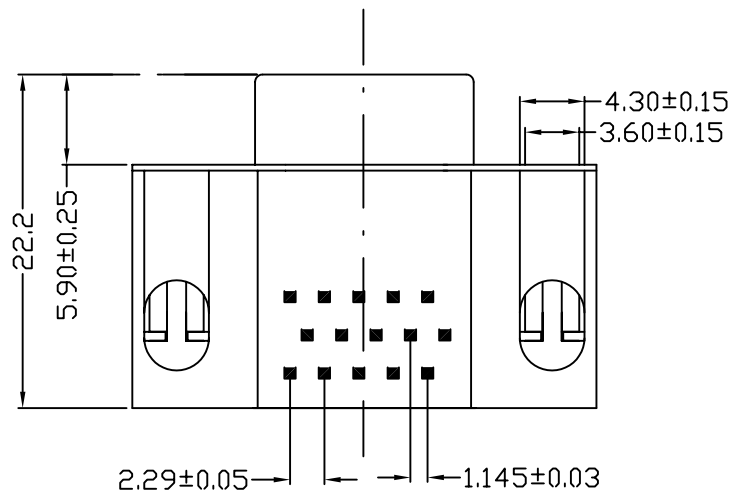

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XXX±

DATE

ANG±

煜倫股份有限公司

www.morethanall.com

SIZE A4

PPOJECTION



ORDER INFORMATION

HDR-SGNBL-15-LF
SERIES | | | LEADFREE
| | | 15 WAY
| | | BLUE
| | | NUT
| | | FULL GOLD
| | | FEMALE

DESCRIPTION: 15P 8.89mm Female Color blue