




- * Poles:2-24
- * Material:NYLON 66 UL94V-2

Specifications

- * Current rating: 7A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -25°C~+120°C
- * Insulation resistance: 1,000M Ω min.
- * Withstand voltage: 1,500V AC/minute

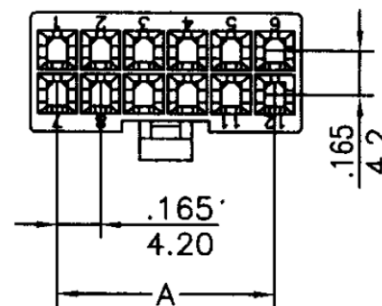

inches
mm

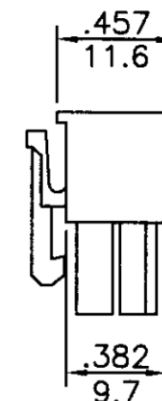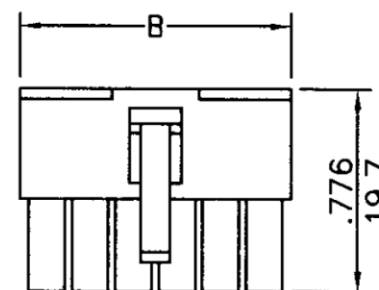

CIRCUITS	PART NO.	DIMENSION in.(mm)	
		A	B
2	MF-SH-2X01		0.217(5.5)
4	MF-SH-2X02	0.165(4.20)	0.382(9.7)
6	MF-SH-2X03	0.331(8.40)	0.547(13.9)
8	MF-SH-2X04	0.496(12.60)	0.713(18.1)
10	MF-SH-2X05	0.661(16.80)	0.878(22.3)
12	MF-SH-2X06	0.837(21.00)	1.043(26.5)

CIRCUITS	PART NO.	DIMENSION in.(mm)	
		A	B
14	MF-SH-2X07	0.992(25.20)	1.209(30.7)
16	MF-SH-2X08	1.157(29.40)	1.374(34.9)
18	MF-SH-2X09	1.323(33.60)	1.539(39.1)
20	MF-SH-2X10	1.488(37.80)	1.705(43.3)
22	MF-SH-2X11	1.654(42.00)	1.870(47.5)
24	MF-SH-2X12	1.819(46.20)	2.035(51.7)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

MF-SH-2Xxx-LF
SERIES | LEADFREE
2X01:02WAY
2X12:24WAY
HOUSING
FEMALE

DESCRIPTION: (4.20mm)MINI-FIT CONNECTOR HOUSING