


FRONT VIEW

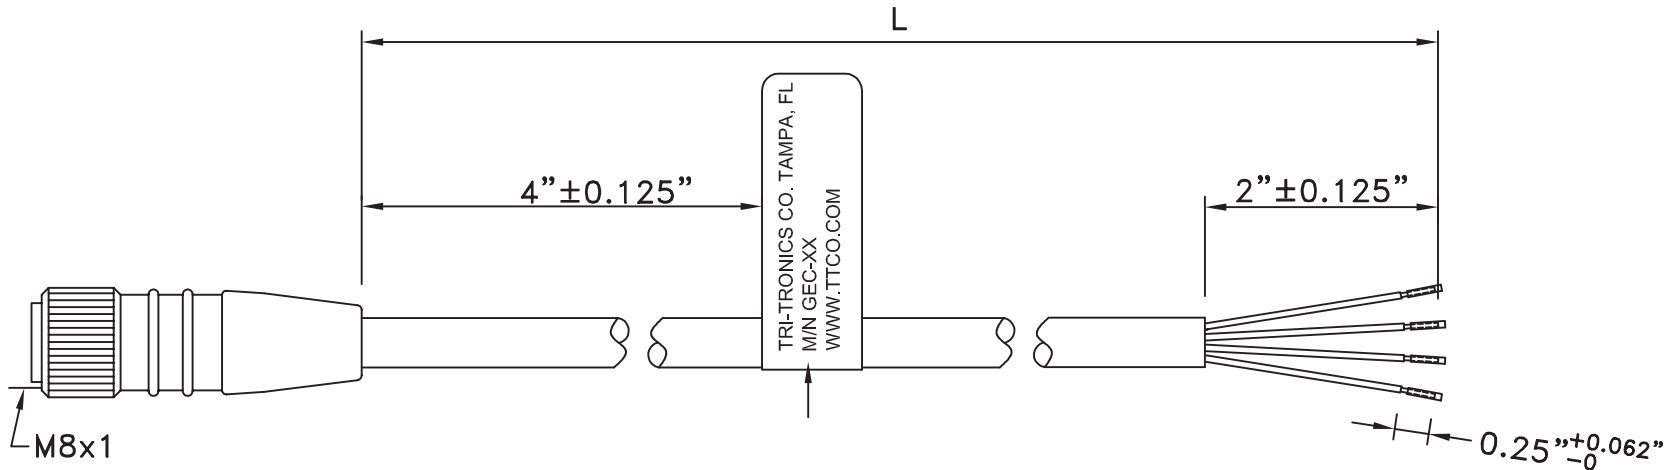

M8x1
M8-4PIN FEMALE
MOLDED PUR YELLOW

PIN OUT

M8-4PIN FEMALE

1	BROWN	NC
2	WHITE	NC
3	BLUE	NC
4	BLACK	NC

(L=6'±2")
(L=15'±6")
(L=25'±1')




www.morethanall.com

RoHS Compliant


DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1:1
DATE

TOLERANCES ARE

X.±
.X±
.XX±
.XXX±
ANG±



ORDER INFORMATION

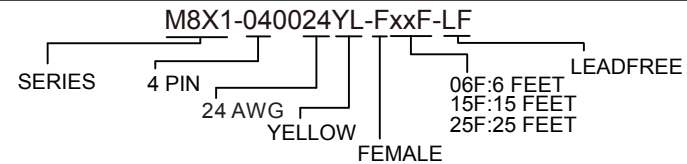

DESCRIPTION: M8-4PIN FEMALE TO OPEN (YELLOW PVC JACKET)

*****CONSTRUCTION:**

1.CABLE: * UL2464 (4C/24#)+TISSUE PAPER OD:4.4mm YELLOW PVC JACKET.

*****CONNECTORS:**

- 2.M8-4PIN: * M8-4PIN FEMALE SOLDER TYPE.
 * PIN: BRASS WITH GOLD PLATED.
 * INSULATOR: BLACK NYLON 66 UL 94V-0 RATED.
 * COUPLING NUT: M8x1 BRASS WITH NICKEL PLATED.
 * O-RING: SILICONE RUBBER RED COLOR.
 * MOLDED: PUR YELLOW COLOR.
- 3.LABEL: * PRINT: "TRI-TRONICS CO. TAMPA, FL M/N GEC-XX WWW.TTCO.COM"
- 4.TEST: * CT: 2 Ohm. IS: 5M Ohm.
- 5.ELECTRICAL: * CURRENT RATING: 2A VOLTAGE RATING: 250V
- 6.MECHANICAL: * TEMPERATURE: -25°C TO 80°C PROTECTION: IP 68, NEMA 6P
- 7.PACKING: * PACK EACH CABLE IN A POLY BAG.
- 8.MATERIAL: * MATERIAL WITH RoHS GRADE.
- 9.MARKINGS: (1). CABLE TO BE PERMANENTLY MARKED WITH THE FOLLOWING INFORMATION
 (THIS SET OF INFORMATION IS TO REPEAT ITSELF THROUGHOUT THE ENTIRE LENGTH OF THE CORDSET WITH APPX. 6" OF SPACE BETWEEN EACH SET):
 UL CERT. INFORMATION (AWM STYLE, UL FILE NO., CABLE RATINGS,ETC.);
 CSA CERT. INFORMATION (AWM STYLE, CSA FILE NO., CABLE RATINGS,ETC.)
 (2). NO O.E.M. MARKINGS ARE PERMITTED ON THE CABLE OR CONNECTOR
 (3). ID LABEL MAY EITHER BE FLAGGED (AS ILLUSTRATED) OR WRAP AROUND


RoHS Compliant

TOLERANCES ARE


MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
煜倫股份有限公司

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1:1
 DATE

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

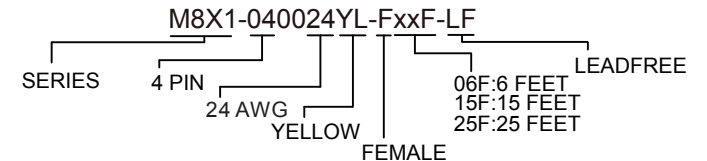

www.morethanall.com

SIZE A4 PPROJECTION

DESCRIPTION: M8-4PIN FEMALE TO OPEN (YELLOW PVC JACKET)