
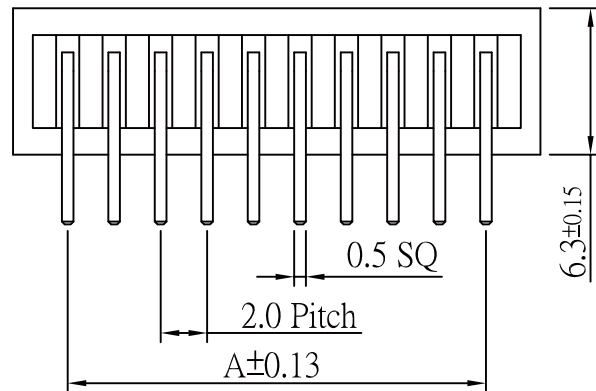
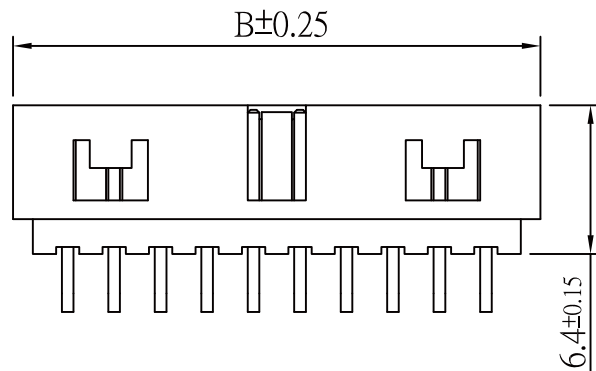
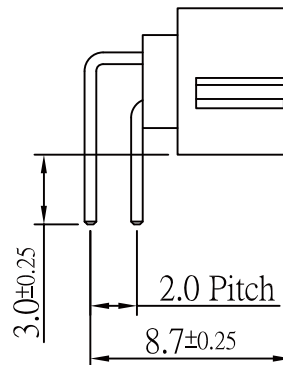


P.C.Board Layout

Contract:
Contact:Brass.
Insuiator:Nylon 6 T.
Finish:Gold flash plated over nickel.

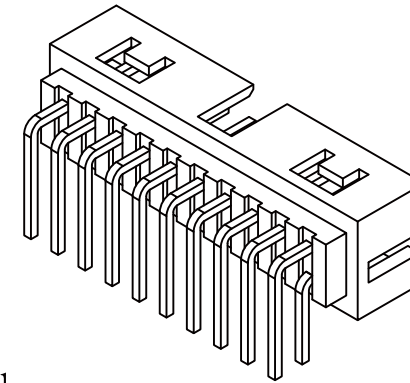

Circuits	Dimension		Circuits	Dimension	
	A	B		A	B
8	6.0	10.7	46	44.0	48.7
10	8.0	12.7	48	46.0	50.7
12	10.0	14.7	50	48.0	52.7
14	12.0	16.7	52	50.0	54.7
16	14.0	18.7	54	52.0	56.7
18	16.0	20.7	56	54.0	58.7
20	18.0	22.7	58	56.0	60.7
22	20.0	24.7	60	58.0	62.7
24	22.0	26.7	62	60.0	64.7
26	24.0	28.7	64	62.0	66.7
28	26.0	30.7	66	64.0	68.7
30	28.0	32.7	68	66.0	70.7
32	30.0	34.7	70	68.0	72.7
34	32.0	36.7	72	70.0	74.7
36	34.0	38.7	74	72.0	76.7
38	36.0	40.7	76	74.0	78.7
40	38.0	42.7	78	76.0	80.7
42	40.0	44.7	80	78.0	82.7
44	42.0	46.7			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MPVK-RB-2Xxx-LF

SERIES

LEADFREE

2X04:08WAY

2X40:80WAY

BOX
DIP 90°

DESCRIPTION: 2.0 Pitch Dual RoW Box Header /Right Angle,Dip