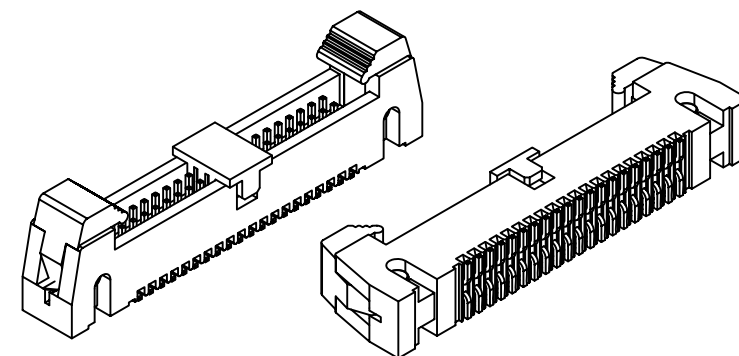
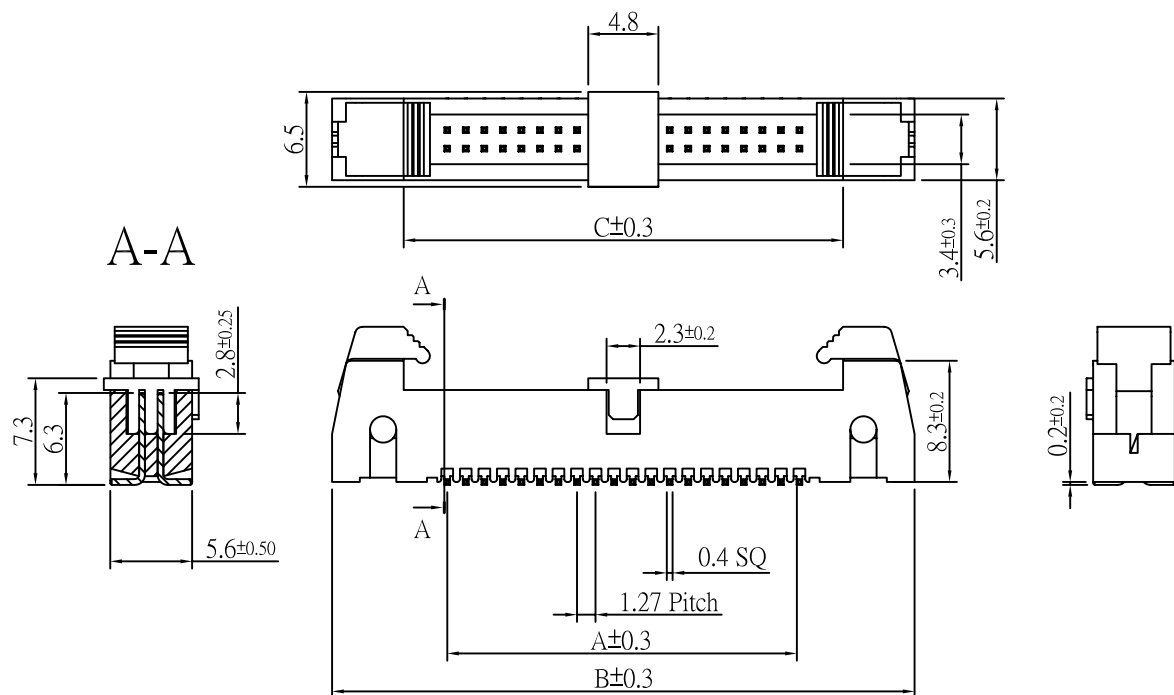


P.C.Board Layout

Contact:
Contact:Brass.
Insulator:LCP.
Finish:Gold flash plated over nickel.

Circuits	Dimension		
	A	B	C
6	2.54	18.31	8.46
10	5.08	20.85	11.00
12	6.35	22.12	12.27
14	7.62	23.39	13.54
16	8.89	24.66	14.81
20	11.43	27.20	17.35
26	15.24	31.01	21.16
30	17.78	33.55	23.70
34	20.32	36.09	26.24
40	24.13	39.90	30.05
44	26.67	42.44	32.59
50	30.48	46.25	36.40
60	36.83	52.60	42.75
64	39.37	55.14	45.29
66	40.64	56.41	46.56
68	41.91	57.68	47.83

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

HAL-VC-xxx-LF
SERIES | LEADFREE
006: 06 WAY
068: 068 WAY
CAP
180°SMT

DESCRIPTION: 1.27-1.27 Pitch Shrouded Header SMT Type