
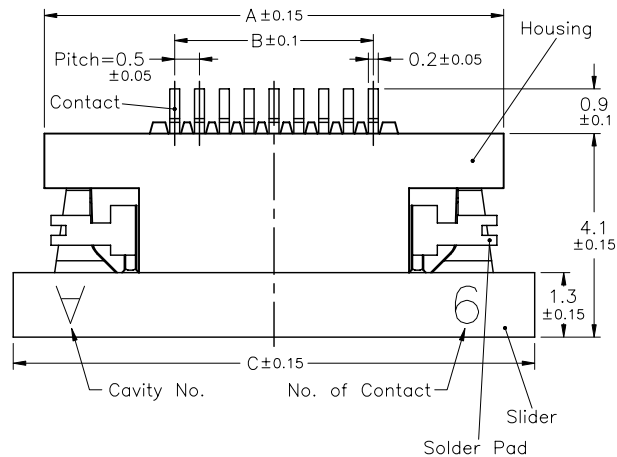




PCB Layout

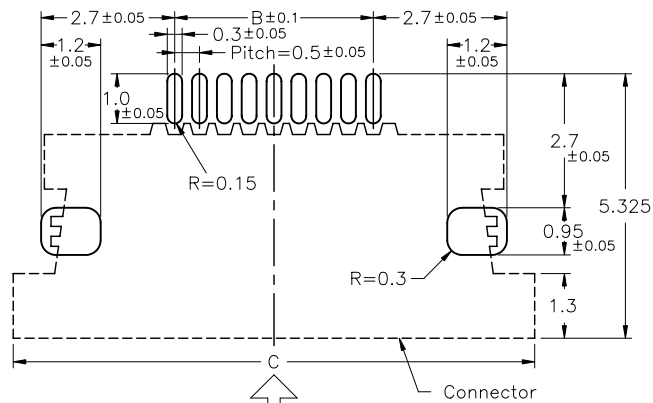


FPC/FFC INSERT DIRECTION

NOTE:

- 1.MATERIAL:
HOUSING:THERMOPLASTIC
SLIDER:THERMOPLASTIC
CONTACTS:COPPER ALLOY
SOLDER PAD:COPPER ALLOY
- 2.PLATING:
CONTACTS:SEE ORDERING INFORMATION
SOLDER PAD:SEE ORDERING INFORMATION
- 3.RATING:
OPERATING VOLTAGE:50V
CURRENT RATING:0.4A
OPERATING TEMPERATURE:-55°C ~ +85°C

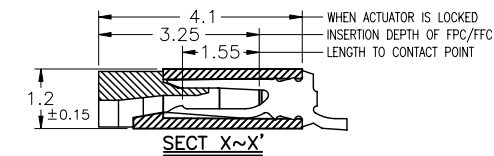

Applicable FPC

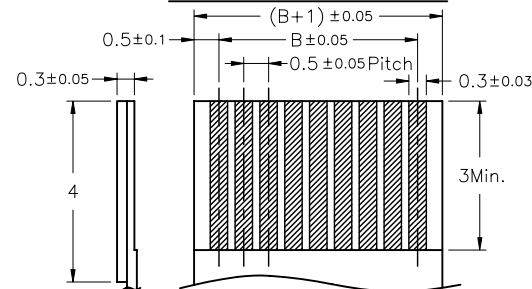

No. of Contacts	Part Number	DIM. A	DIM. B	DIM. C	DIM. D
4	FPV-WZB12-04	6.75	1.5	8	2.6
5	FPV-WZB12-05	7.25	2	8.5	3.1
6	FPV-WZB12-06	7.75	2.5	9	3.6
7	FPV-WZB12-07	8.25	3	9.5	4.1
8	FPV-WZB12-08	8.75	3.5	10	4.6
9	FPV-WZB12-09	9.25	4	10.5	5.1
10	FPV-WZB12-10	9.75	4.5	11	5.6
11	FPV-WZB12-11	10.25	5	11.5	6.1
12	FPV-WZB12-12	10.75	5.5	12	6.6
13	FPV-WZB12-13	11.25	6	12.5	7.1
14	FPV-WZB12-14	11.75	6.5	13	7.6
15	FPV-WZB12-15	12.25	7	13.5	8.1
16	FPV-WZB12-16	12.75	7.5	14	8.6
17	FPV-WZB12-17	13.25	8	14.5	9.1
18	FPV-WZB12-18	13.75	8.5	15	9.6
19	FPV-WZB12-19	14.25	9	15.5	10.1
20	FPV-WZB12-20	14.75	9.5	16	10.6
21	FPV-WZB12-21	15.25	10	16.5	11.1
22	FPV-WZB12-22	15.75	10.5	17	11.6
23	FPV-WZB12-23	16.25	11	17.5	12.1
24	FPV-WZB12-24	16.75	11.5	18	12.6
25	FPV-WZB12-25	17.25	12	18.5	13.1
26	FPV-WZB12-26	17.75	12.5	19	13.6
27	FPV-WZB12-27	18.25	13	19.5	14.1
28	FPV-WZB12-28	18.75	13.5	20	14.6
29	FPV-WZB12-29	19.25	14	20.5	15.1
30	FPV-WZB12-30	19.75	14.5	21	15.6
31	FPV-WZB12-31	20.25	15	21.5	16.1
32	FPV-WZB12-32	20.75	15.5	22	16.6
33	FPV-WZB12-33	21.25	16	22.5	17.1
34	FPV-WZB12-34	21.75	16.5	23	17.6
35	FPV-WZB12-35	22.25	17	23.5	18.1
36	FPV-WZB12-36	22.75	17.5	24	18.6
37	FPV-WZB12-37	23.25	18	24.5	19.1
38	FPV-WZB12-38	23.75	18.5	25	19.6
39	FPV-WZB12-39	24.25	19	25.5	20.1
40	FPV-WZB12-40	24.75	19.5	26	20.6
41	FPV-WZB12-41	25.25	20	26.5	21.1
42	FPV-WZB12-42	25.75	20.5	27	21.6
43	FPV-WZB12-43	26.25	21	27.5	22.1
44	FPV-WZB12-44	26.75	21.5	28	22.6
45	FPV-WZB12-45	27.25	22	28.5	23.1
46	FPV-WZB12-46	27.75	22.5	29	23.6
47	FPV-WZB12-47	28.25	23	29.5	24.1
48	FPV-WZB12-48	28.75	23.5	30	24.6
49	FPV-WZB12-49	29.25	24	30.5	25.1
50	FPV-WZB12-50	29.75	24.5	31	25.6

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

FPV-WZB12-xx-LF

SERIES

LEADFREE

04-50WAY

HIGH 1.2mm

BOTTOM CONTACT

ZIF

90°SMT

DESCRIPTION: 0.5mm Pitch FPC/FFC Connector