
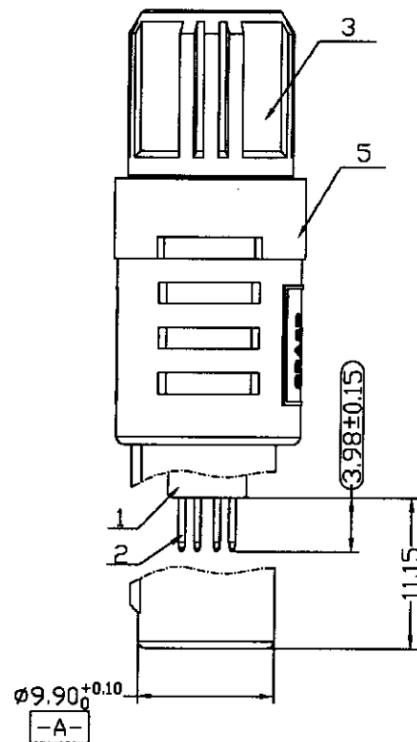
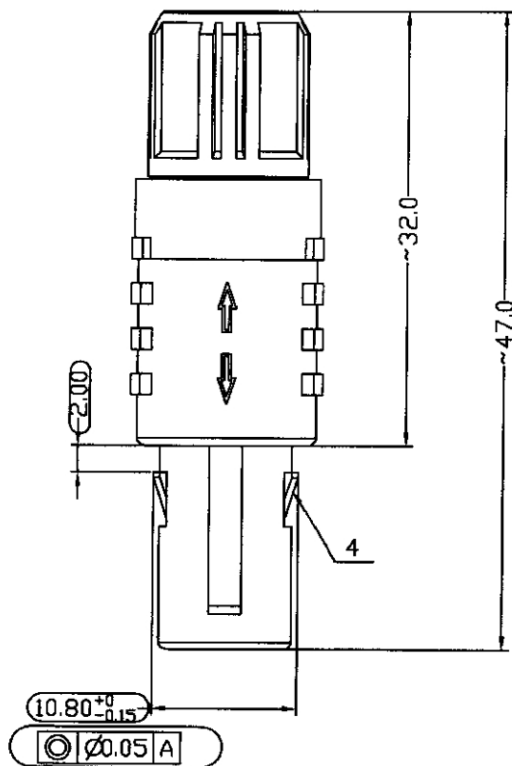





PART NO. DESCRIPTION

6	CABLE COLLET
5	STRAIGHT PLUG HOUSING
4	INTERNAL HOUSING
3	BACK NUT
2	CONTACT
1	INSERT
NO	PART NAME

备注 : (Remark)

- 材質: 外殼: PSU
(Material: Shell: PSU)
絕緣體: PEEK
(Insert: PEEK)
端子: 黃銅
(Contacts: Brass)
線夾: PSU
(Cable collect: PSU)
螺帽: PSU
(Back Nut: PSU)
- 所有的尺寸都以毫米為單位
(Dimensions in "mm")
- 符合ROHS
(RoHS compliant)
- 以Q做標識的尺寸需經Q.C制程管制
(QC control item "Q")
- 芯數: 02.04.05.06.07.08.09.10.14芯
(available pin: 2, 4, 5, 6, 7, 8, 9, 10, 14)
- 螺帽的扭力是6kgf.cm
(Back Nut torque is 6kgf.cm)
- 與母端成品插拔力為2kg
(mating/unmating force: 2kg)
- solder temperature: 350±5°C, 2 Seconds,

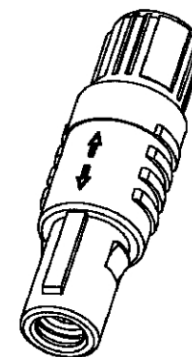

3D 參考圖

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

PP9-PA-xx-LF
SERIES T LEADFREE
02~14WAY
ASSEMBLY
MALE

DESCRIPTION: