

SPECIFICATIONS

Current Rating:

3 Amp

Voltage Rating:

250V

Insulator resistance:

5000 M Ω Min.

Contact Resistance:

20 m Ω Max.

Dielectric withstanding:

AC 1000V/minute

Operating Temperature:

-40° ~ +75°C

Contact Material:

Brass

Insulator Material:


Nylon-6T UL94V-0

Color: Natural



Finish:

Tin plated

Cir- uits	Dimension mm	
	L1	L2
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.59
12	27.59	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10

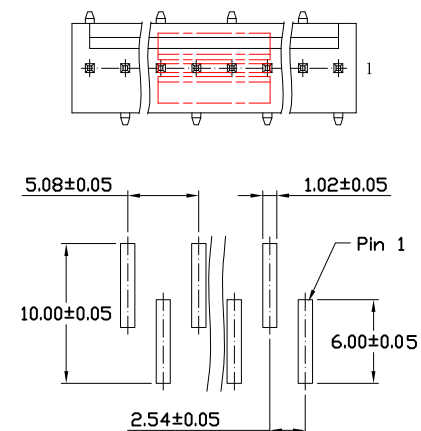

RECOMMENDED P. C. B. LAYOUT

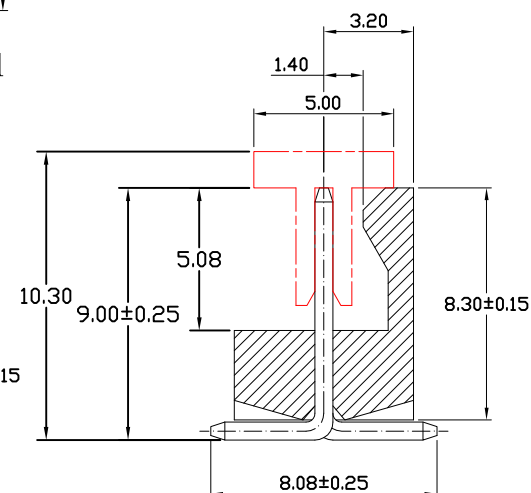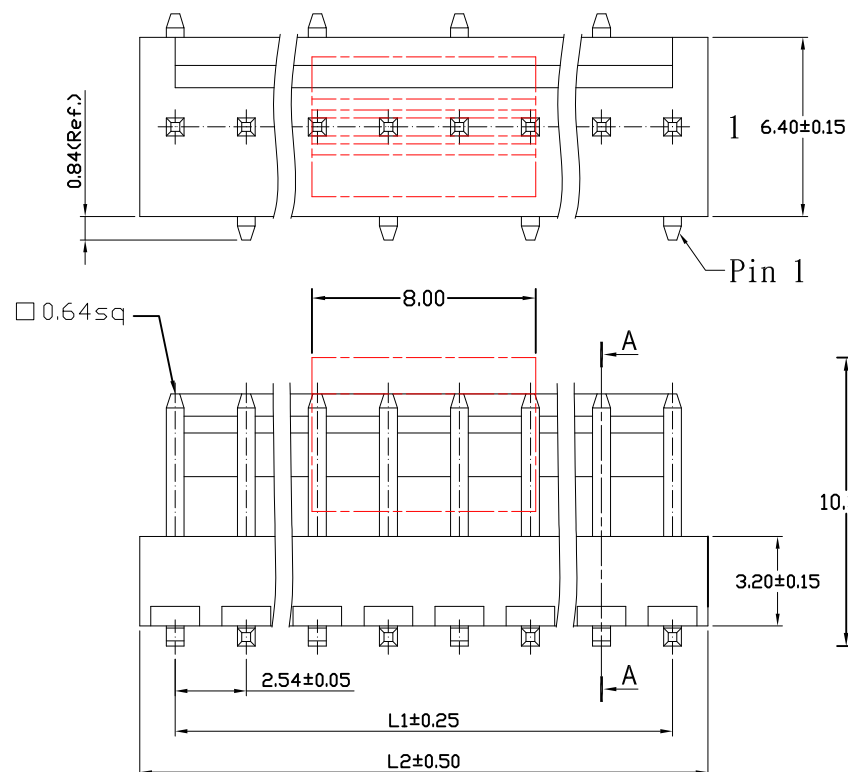

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MT-VXC-xxR-LF
SERIES LEADFREE
R TYPE FOOT
02~15 WAY
CAP
NON POST
180°SMT

DESCRIPTION: