
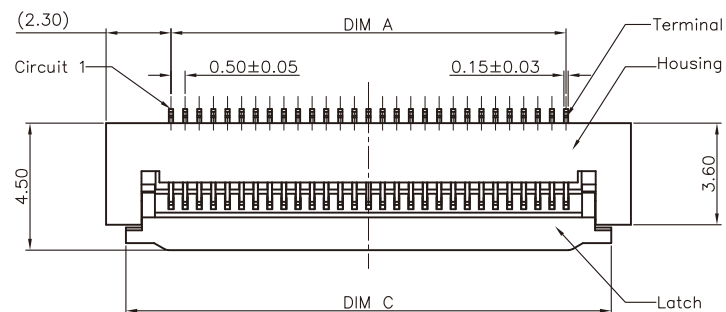



Material:

- 1.1 Housing: thermoplastic high temp. UL94V-0; Color: Natural.
- 1.2 Latch: thermoplastic high temp. UL94V-0; Color: Black.
- 1.3 Terminal: Copper Alloy.
- 1.4 Fitting Nail: Copper Alloy.

PIN NO.	DIM. A	DIM. B	DIM. C
4~N~50	NX0.5-0.5	NX0.5+0.6	NX0.5+2.7

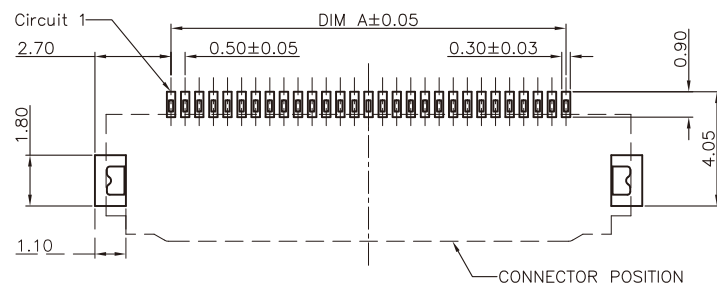

PCB LAYOUT

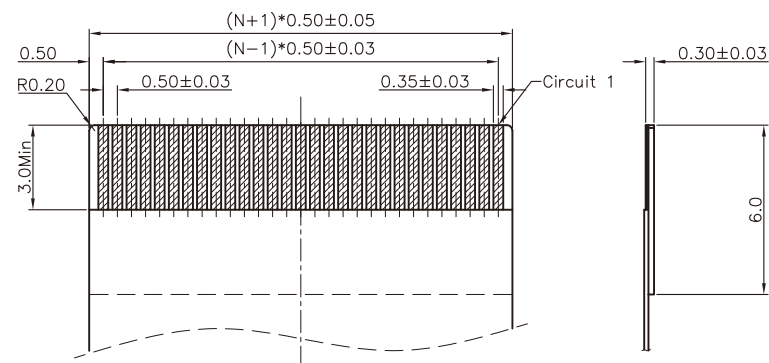

RECOMMENDED FFC/FPC DIM.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.20
.XX ± 0.15
.XXX ± 0.10
ANG ±

PPOJECTION



ORDER INFORMATION

FPV-WHB15-xx-LF
SERIES
90°SMT
LEADFREE
04~50WAY
HIGH 1.5mm
BOTTOM CONTACT
HINGED ZIF

DESCRIPTION: 0.5mm ZIF FPC CONNECTOR PIANO TYPE H=1.5