
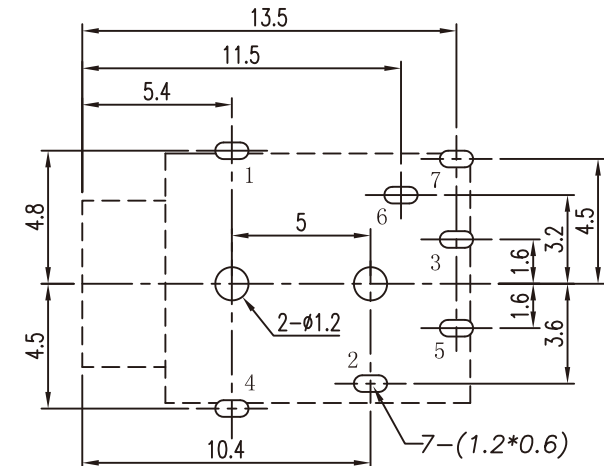


UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

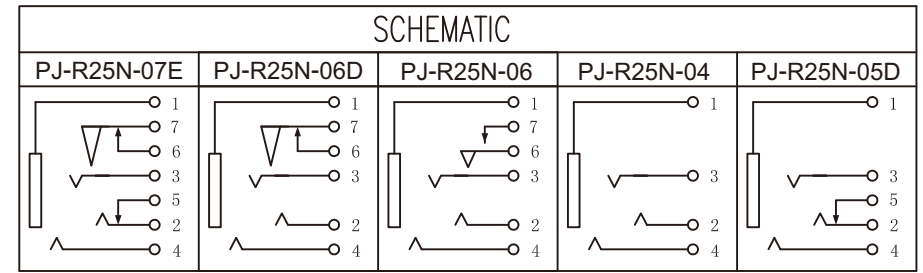

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.1 (Printed-top view)

LTR	PART NAME	QTY	MATERIAL	REMARK
8	HOUSING	1	PBT 4815	UL-94V0(BLACK)
7	TRANSFER TERMINAL	1	SUS301 t=0.20	MB:Ni Ag PLATED
6	BREAK TERMINAL	1	C2680 t=0.20	MB:Ni Ag PLATED
5	SHUNT TERMINAL	1	C2680 t=0.25	MB:Ni Ag PLATED
4	RING SPRING	1	C5191 t=0.30	MB:Ni Ag PLATED
3	RING SPRING	1	SUS301 t=0.20	MB:Ni Ag PLATED
2	TIP SPRING	1	C5191 t=0.25	MB:Ni Ag PLATED
1	EARTH SPRING	1	C5191 t=0.20	MB:Ni Au PLATED

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm SCALE 1:1

DATE


SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PJECTION



ORDER INFORMATION

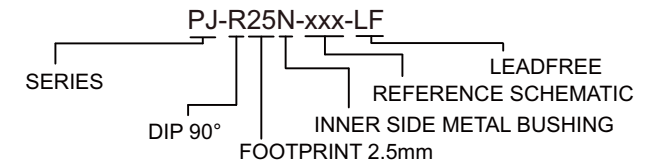

DESCRIPTION: