


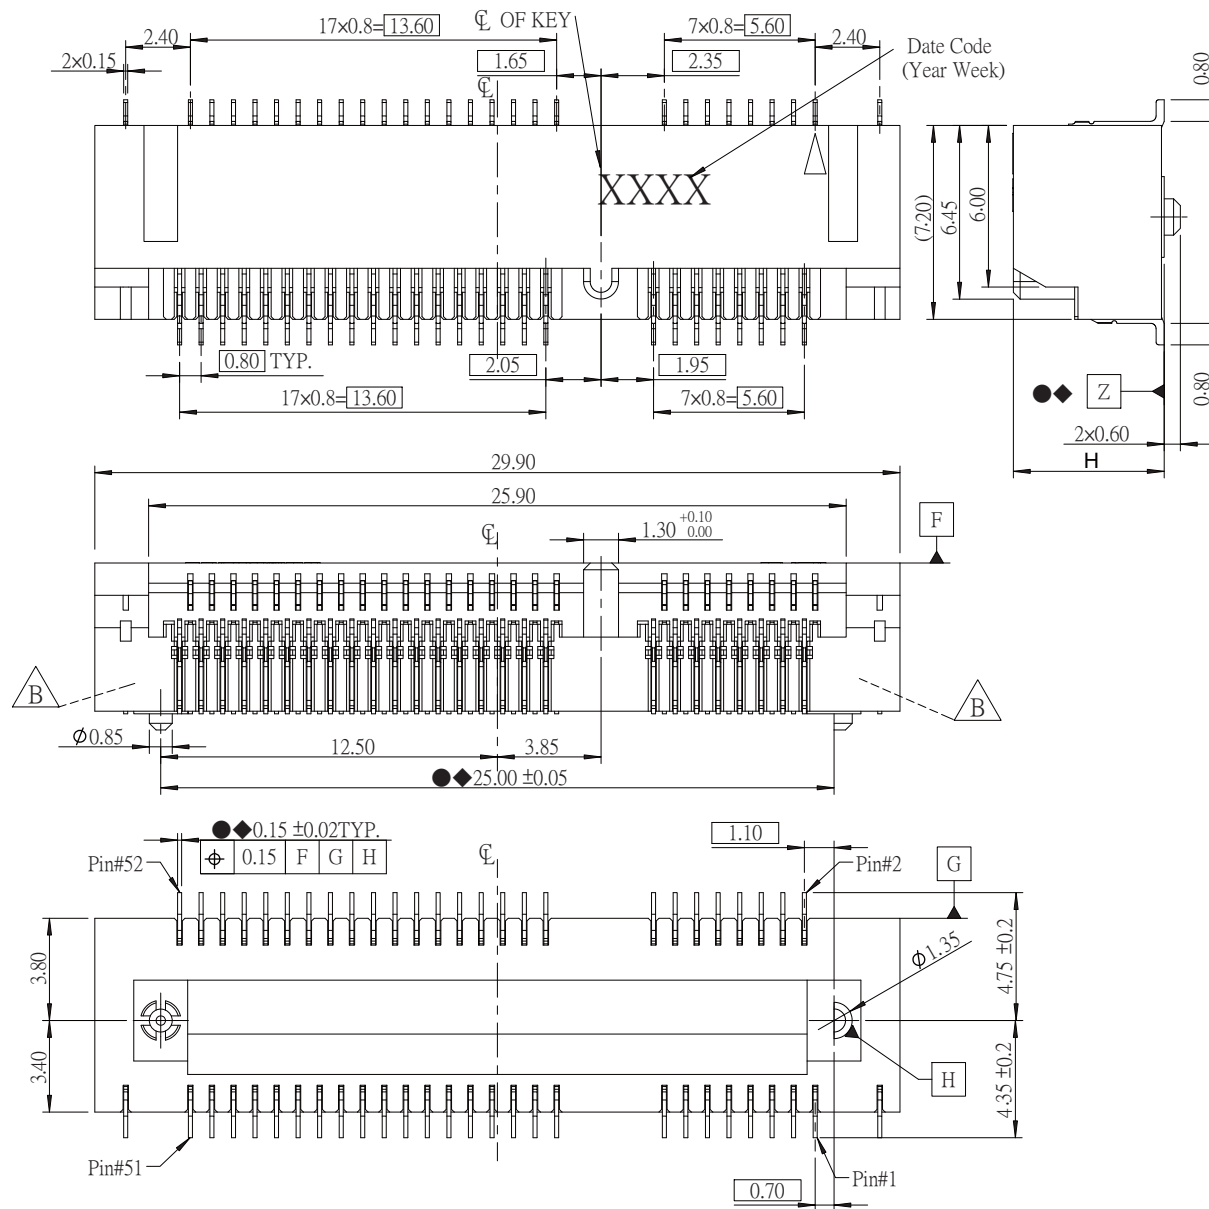

NOTE:

1. SOLDER TAIL TO BE WITHIN 0.05 UPWARD AND 0.2 DOWNWARD FROM Z-DATUM PLACE, AND COPLANARITY OF SOLDER TAILS TO BE WITHIN 0.10 MEASUREMENT POINT IS SOLDER TAILS TIP.

2. MATERIAL:
HOUSING :HIGH-TEMPERATURE PLASTIC,
COLOR:BLACK,UL 94 V-0
TERMINAL:COPPER ALLOY

3.FINISH:

TERMINAL:
NICKEL UNDERPLATING ALL OVER BASE MATERIAL
CONTACT AREA : GOLD FLASH PLATING OVER UNDERPLATE
SOLDER AREA : GOLD FLASH PLATING OVER UNDERPLATE

4. INSPECTION SYMBOL:

● : MANUFACTURER INSPECTION
◆ : Q.C INSPECTION

P/N	H
MPCI-W90-052	9.00

P/N	H
MPCI-W40-052	4.00
MPCI-W52-052	5.20
MPCI-W56-052	5.60
MPCI-W68-052	6.80
MPCI-W80-052	8.00
MPCI-W92-052	9.20

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30

.X ± 0.20

.XX ± 0.10

.XXX ± 0.05

ANG ±



ORDER INFORMATION

MPCI-Wxx-052-LF


SERIES 90°SMT HIGH 4.00mm 5.20mm 5.60mm 6.80mm 8.00mm 9.00mm 9.20mm 52WAY LEADFREE

DESCRIPTION: MINI PCI EXPRESS ASSEMBLY


MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司


www.morethanall.com

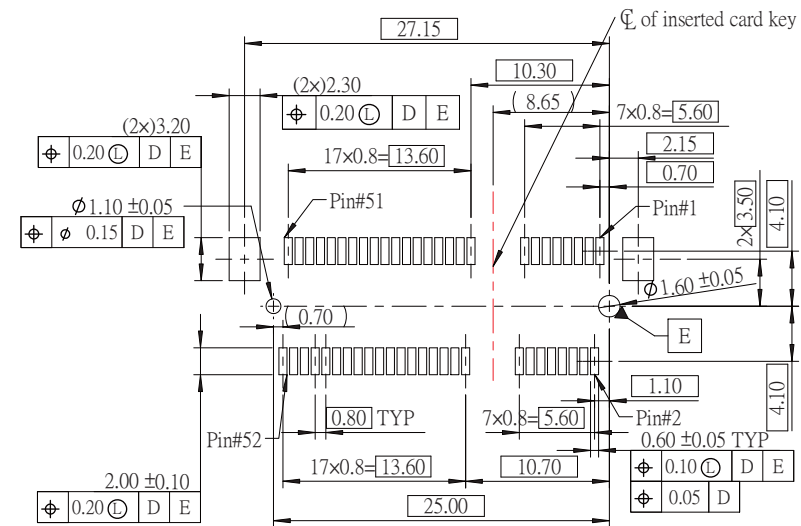

Datum D is the top surface of PCB.
RECOMMENDED P.C.B. LAYOUT
TOP VIEW(2:1)



C (4 : 1)

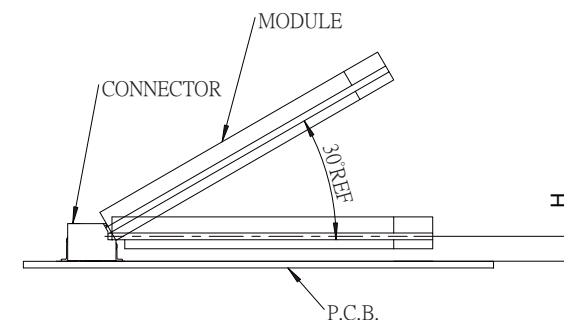

MATING CONDITION

P/N	H
MPCI-W40-052	2.11
MPCI-W52-052	3.31
MPCI-W56-052	3.71
MPCI-W68-052	4.91
MPCI-W80-052	6.11
MPCI-W92-052	7.31

P/N	H
MPCI-W90-052	7.10

SERIES 90°SMT HIGH 4.00mm 5.20mm 5.60mm 6.80mm 8.00mm 9.00mm 9.20mm 52WAY LEADFREE

DESCRIPTION: MINI PCI EXPRESS ASSEMBLY

煜倫股份有限公司

www.morethanall.com