


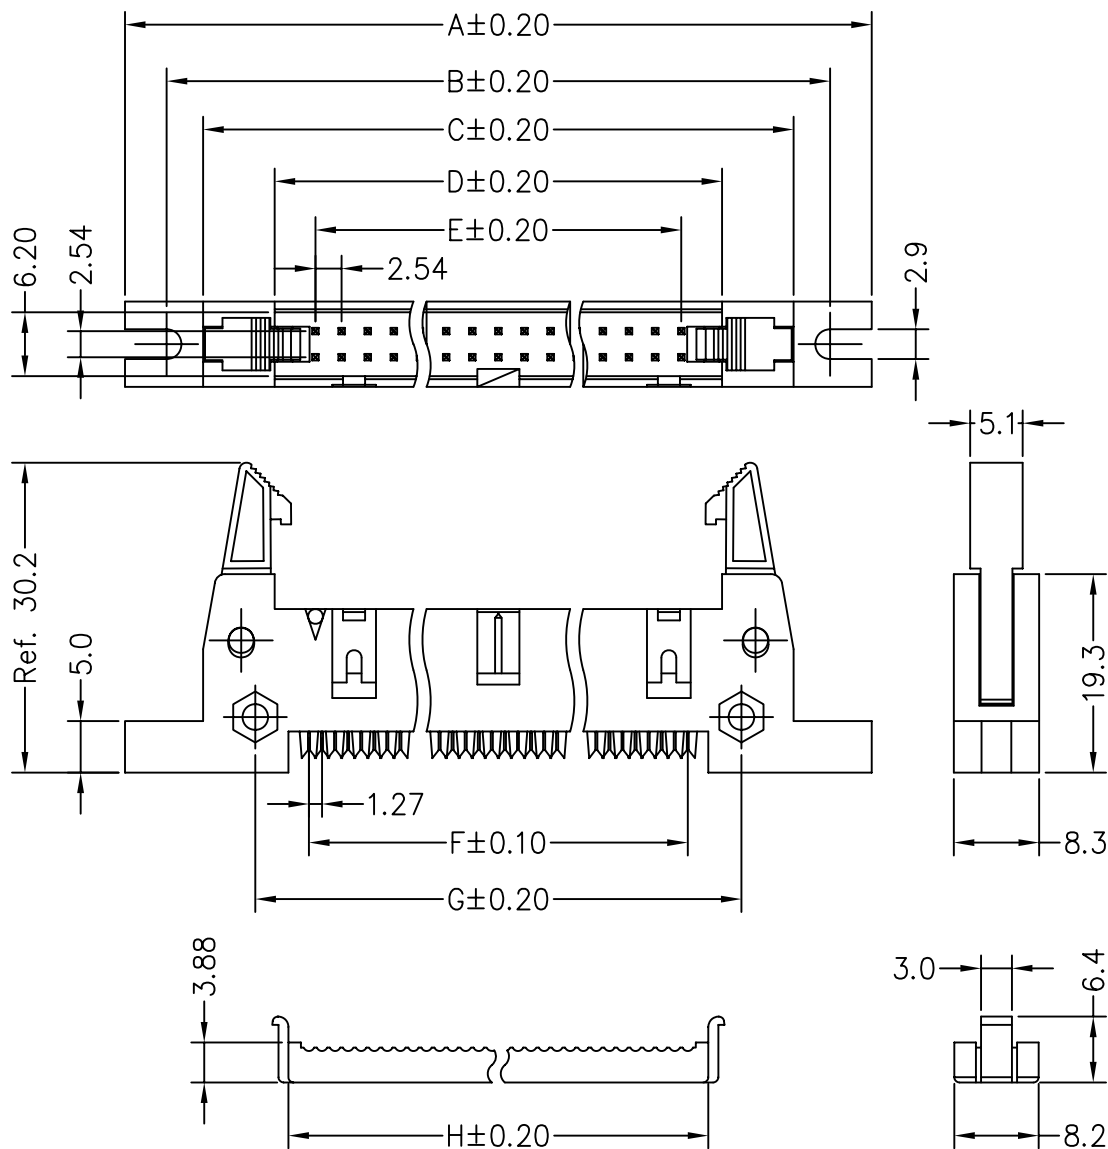

Material:

1. Insulator: PBT+30% Glass Fiber(Meet UL94V-0).
2. Contact: Copper Alloy.
3. Contact Plated: Gold or Tin over Nickel Plated.

Specification:

1. Current Rating: 1 Amp.
2. Withstanding Voltage: AC 500V for 1 Minute.
3. Insulation Resistance: 1000MΩ Min. at DC 500V.
4. Contact Resistance: 15mΩ Max..
5. Operating Temperature: -40°C~+105°C.

No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. F	Dim. G	Dim. H
10	47.20	39.10	32.00	18.10	10.16	11.43	21.86	15.42
14	52.28	44.18	37.08	23.18	15.24	16.51	26.94	20.50
16	54.82	46.72	39.62	25.72	17.78	19.05	29.48	23.04
20	59.90	51.80	44.70	30.80	22.86	24.13	34.56	28.12
24	64.98	56.88	49.78	35.88	27.94	29.21	39.64	33.20
26	67.52	59.42	52.32	38.42	30.48	31.75	42.18	35.74
30	72.60	64.50	57.40	43.50	35.56	36.83	47.26	40.82
34	77.68	69.58	62.48	48.58	40.64	41.91	52.34	45.90
40	85.30	77.20	70.10	56.20	48.26	49.53	59.96	53.52
50	98.00	89.90	82.80	68.90	60.96	62.23	72.66	66.22
60	110.70	102.60	95.50	81.60	73.66	74.93	85.36	78.92
64	115.78	107.68	100.58	86.68	78.74	80.01	90.44	84.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

L-C2HE-xx-LF
SERIES | LEADFREE
10~64WAY
HALF EAR
TWO TYPE

DESCRIPTION: 2.54mm EJECTOR IDC BOX HEADER WITH EAR TYPE