
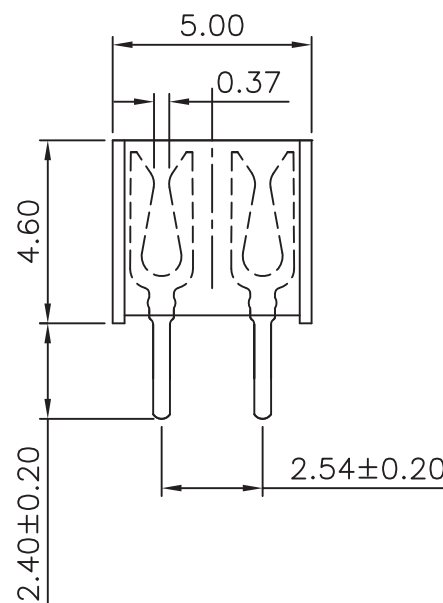
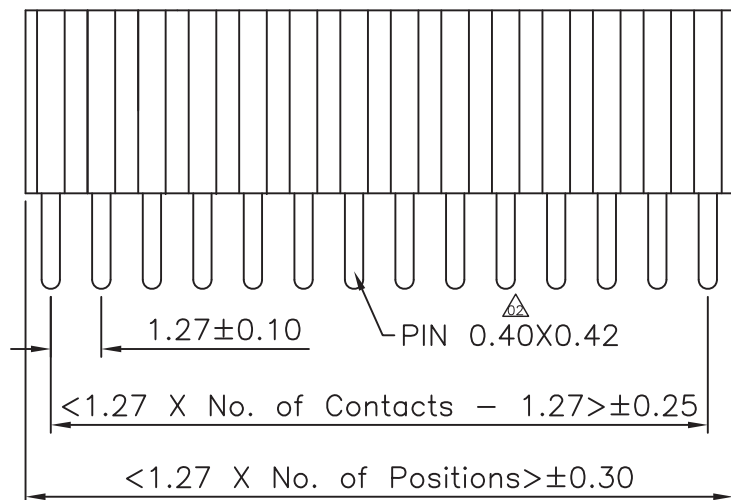


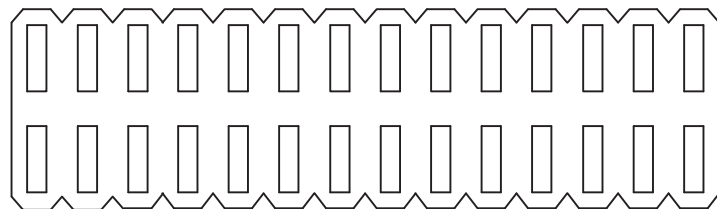

Specifications

Current Rating: 1Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 300V AC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C

Materials


Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0

LCP 

Recommended P.C.B. Layout

(Tolerance: ±0.05)



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ± 0.30


.X ± 0.25

.XX ± 0.15


.XXX ± 0.10

ANG ±

PJECTION 



ORDER INFORMATION

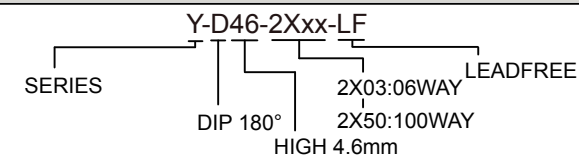

DESCRIPTION: 1.27 FEMALE HEADER DUAL ROWS DIP TYPE CONNECTOR