



NOTES:



1. MATERIAL:
 CONTACT:PHOSPHOR BRONZE
 SHELL-STEEL,NICKEL PLATED
 HOUSING: THERMOPLASTIC, NYLON
2. ENVIRONMENTAL:TEMPERATURE RANGE -20°C TO +85°C
3. ELECTRICAL:
 RATED:1.5A @ 40V AC(ms)
 CONTACT RESISTANCE:20 MILLIOHMS MAXIMUM
 INSULATION RESISTANCE: 1G OHMS MINIMUM
 DIELECTRIC WITHSTANDING VOLTAGE:500V AC(ms)
4. MECHANICAL:
 MATING FORCE: 10 LB.(4.5KG) MAXIMUM
 UNMATING FORCE:2.2LB.(1Kg) MINIMUM
 8.8LB.(4Kg) MAXIMUM





A-A SECTION

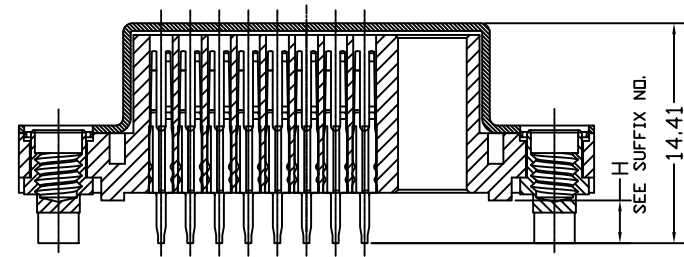

B-B SECTION

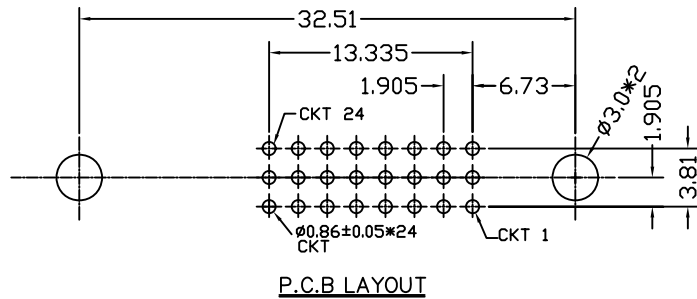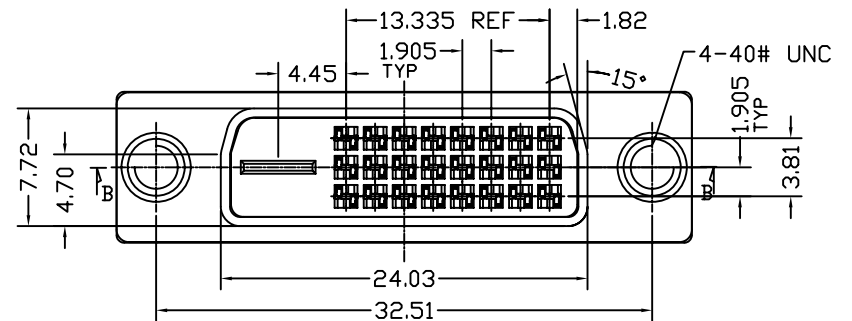

P.C.B LAYOUT

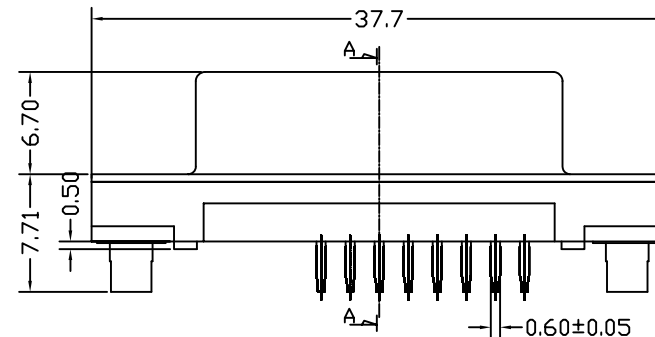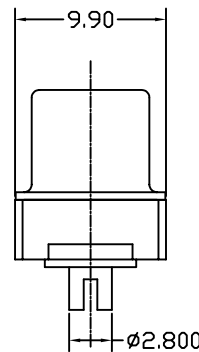

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE
 SIZE A4 PPROJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

DVI-SDN-24+1-LF
 SERIES NUT 24+1 PIN LEADFREE
 DIP 180° FEMALE

DESCRIPTION: DVI 24+1 VERTICLAL FEMALE CONN.(ASSEMBLY DRAWING)