

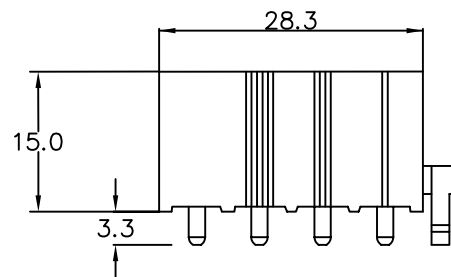


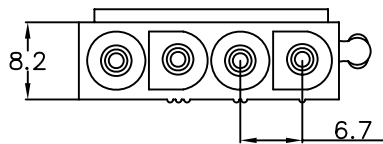


1. 2,3,4 Circuits available
2. Insulation material: UL 94V-2 nylon 66
3. Contact material: Tin-plated brass
4. Standar


d color: Nature

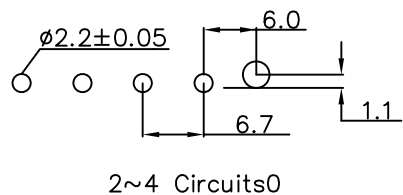

PWL-PDP-1X04

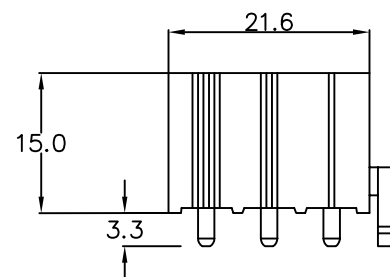

PWL-PDP-1X03



PWL-PDP-1X02

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

PWL-PDP-1Xxx-LF

SERIES	MALE	LEADFREE
		1X02:02 WAY
	POST	1X04:04 WAY
		DIP 180°

DESCRIPTION: