







Position	Dimension		
	A	B	C
30	11.95	10.0	0
60	23.95	22.0	12.0
90	35.95	34.0	24.0
120	47.95	46.0	36.0
150	59.95	58.0	48.0
180	71.95	70.0	60.0
210	83.95	82.0	72.0
240	95.95	94.0	84.0
X	1	2	
Length	3.45	4.25	

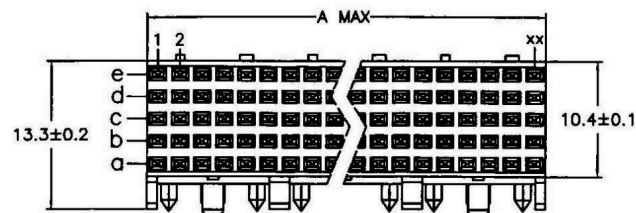

DETAIL J



DETAIL K

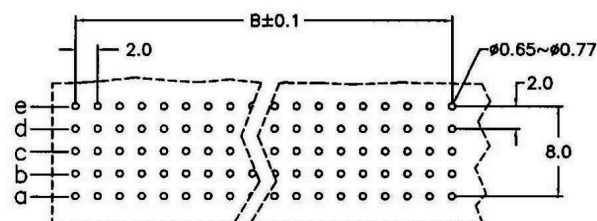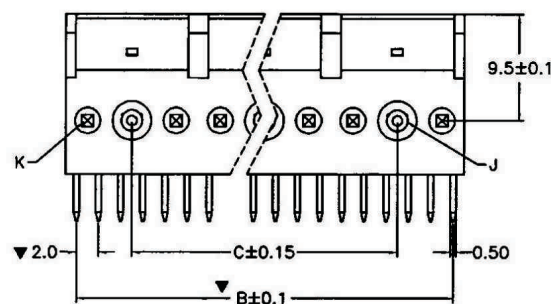

P.C. Board Layout

Material:

Housing: 30% Glass filled LCP UL94V-0.

Contacts: Phosphor Bronze.

Electrical Characteristics:



Current Rating: 1 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩmin. at DC 500V.

Contact Resistance: 30mΩmax. at DC 100mA.

Operating Temperature: -55°C ~ +105°C.

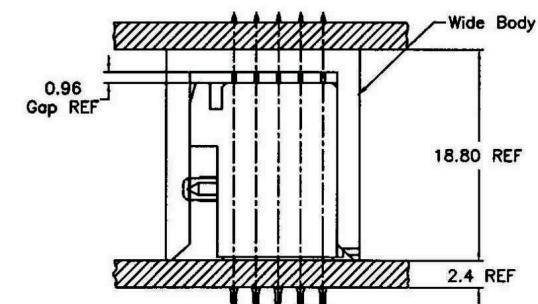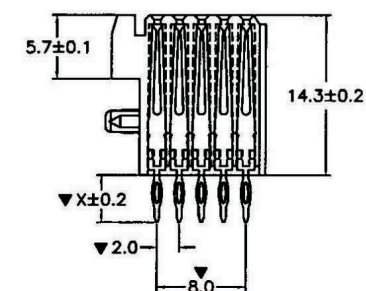

Board-to-Board Offset
Application Example

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

FUB-SPxx-5Xxx-LF
SERIES FEMALE 5X06:30WAY LEADFREE
5X48:240WAY
P03:180°PRESS FIT 3.45mm
P04:180°PRESS FIT 4.25mm

DESCRIPTION: