


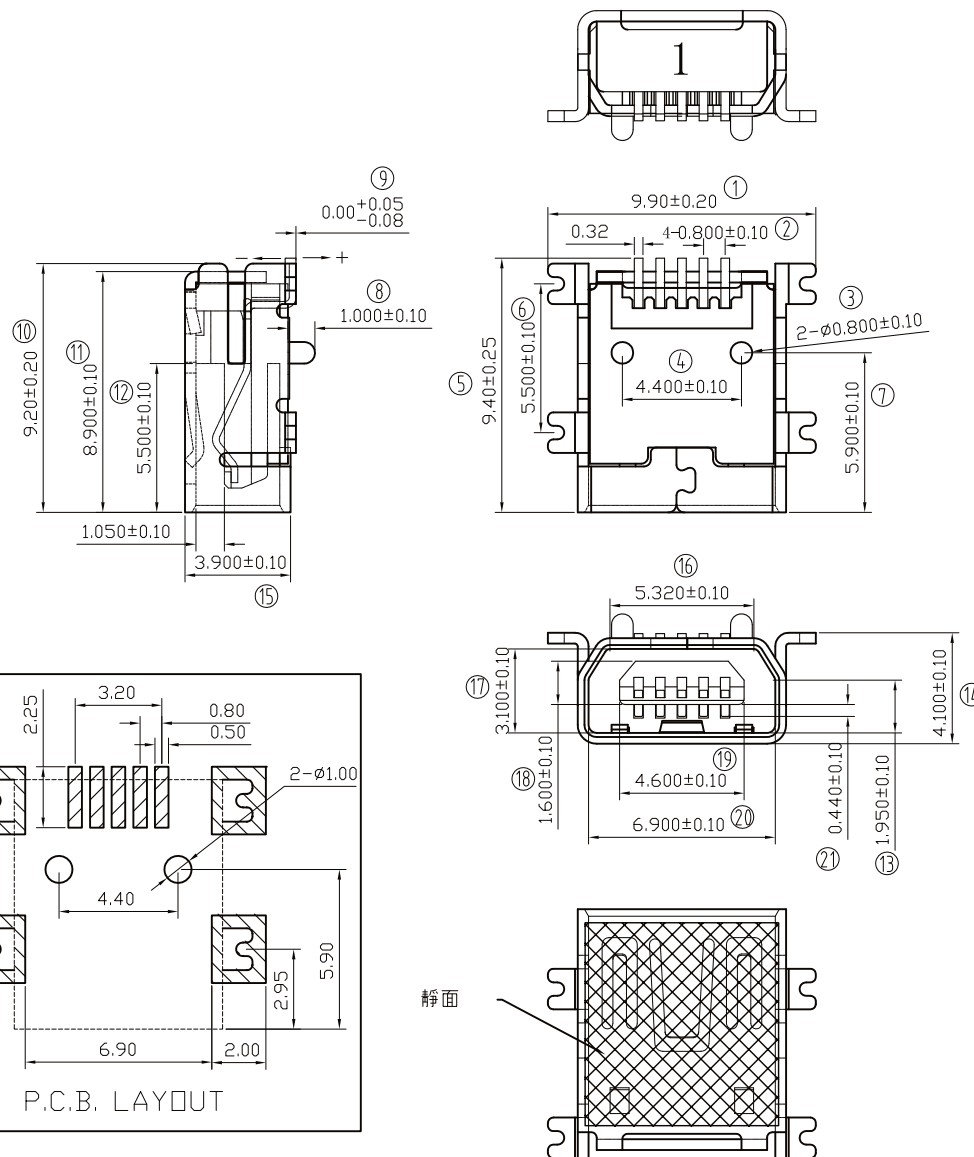

Note:

1.Material:

- 1.1 Insulator: LCP UL 94-V0 rated.
- 1.2 Contact: Phosphor bronze, $t=0.25\text{mm}$.
- 1.3 Shell: K7, $t=0.4\text{mm}$.

2.specification:

- 2.1 Current rating: 1A MAX.
- 2.2 Dielectric withstanding voltage: 500 v(ac) far minuta.
- 2.3 Contact resistance: 30 mΩ max.
- 2.4 Insulation resistance: 1000 MΩ min at DC 500V.
- 2.5 Total mating force: 3.57 kgf max.
- 2.6 Total unmating force: 0.71 kgf min.
- 2.7 Temperature range: $-55^{\circ}\text{C}\sim+105^{\circ}\text{C}$.

3.Finishes:

- 3.1 Contacts: Gold flashed 1U", 3U", 5U", 10U", 15U", 30U"
- 3.2 Shell: Nickel plated.

3	SHELL	1	K7	$T=0.40\pm0.02\text{mm}$	Nickel Plated	D3660XX-H
2	CONTACT	5	Phosphor Bronze	$T=0.25\pm0.02\text{mm}$	Gold Flashed	A3650XX
1	HOUSING	1	LCP		Black	JCH0002
No.	Part Name	Q'ty	Material	Thickness	Finish	Notes

RoHS Compliant

TOLERANCES ARE

X. ±
X. ±
.XX ±
.XXX ±
ANG ±

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION



ORDER INFORMATION

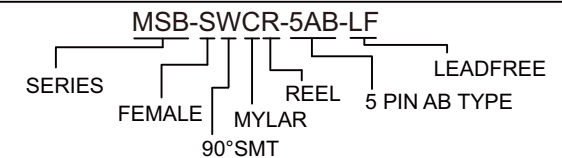


DESCRIPTION: MINI-U.S.B 5P A B FEMALE S.M.T


MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司


www.morethanall.com

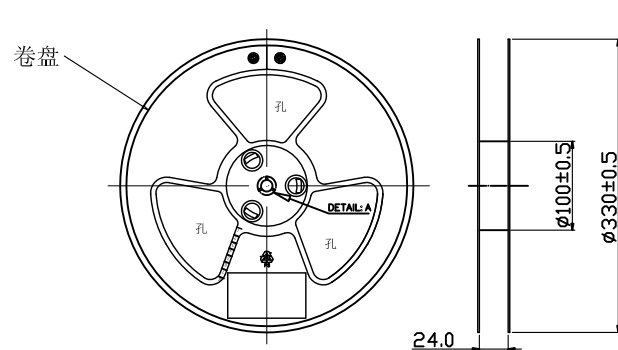


卷帶盤 (圖一)

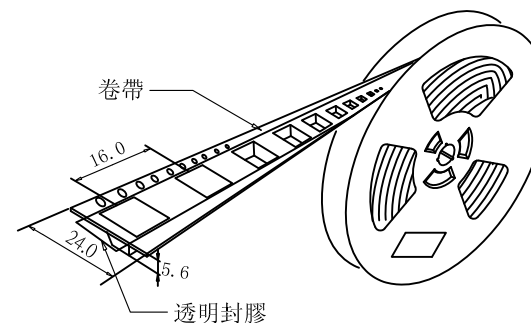


卷裝圖示 (圖二)



未封好內
紙箱 (圖
三)

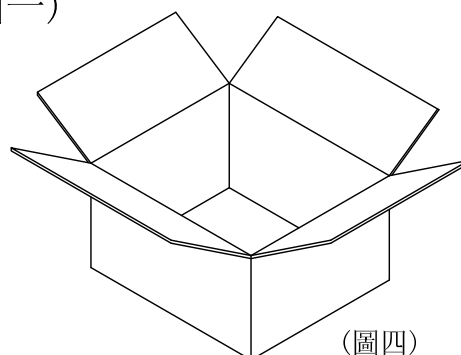

未封好
外紙箱 (圖四)

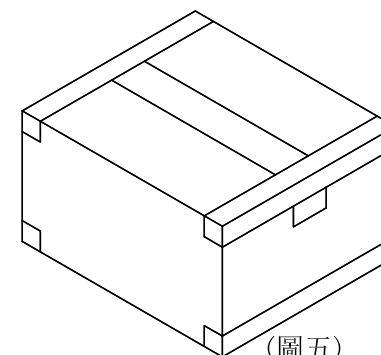

封好外
紙箱 (圖五)

包裝說明:

1. 每卷帶盤裝500PCS,不可少數,成品在盤內SMT腳向下,裝好後使用自動卷裝機粘合上透明封膠. 如圖(一, 二)所示
2. 將裝好的卷帶盤放入內紙箱內, 每個內紙箱放2盤, 用透明膠密封, 再將封裝好的內紙箱放入外紙箱中, 每個外紙箱放8個內紙箱, 共有產品8. 0K, 最後用透明膠密封外紙箱. 如圖(三, 四, 五)所示.
3. 紙箱外貼上環保标签, 合格标签, 產品規格說明, 並且貼在外箱側面的箱面規格說明的右上方 (僅貼一側)
4. 包裝材料:a.每盤500PCS包裝材料(JPL003,XZD012,ZZ001,ZX009,ZX004).

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG, ±

PPOJECTION



ORDER INFORMATION

MSB-SWCR-5AB-LF
SERIES REEL MYLAR 90°SMT FEMALE
LEADFREE 5 PIN AB TYPE

DESCRIPTION: MINI-U.S.B 5P A B FEMALE S.M.T