


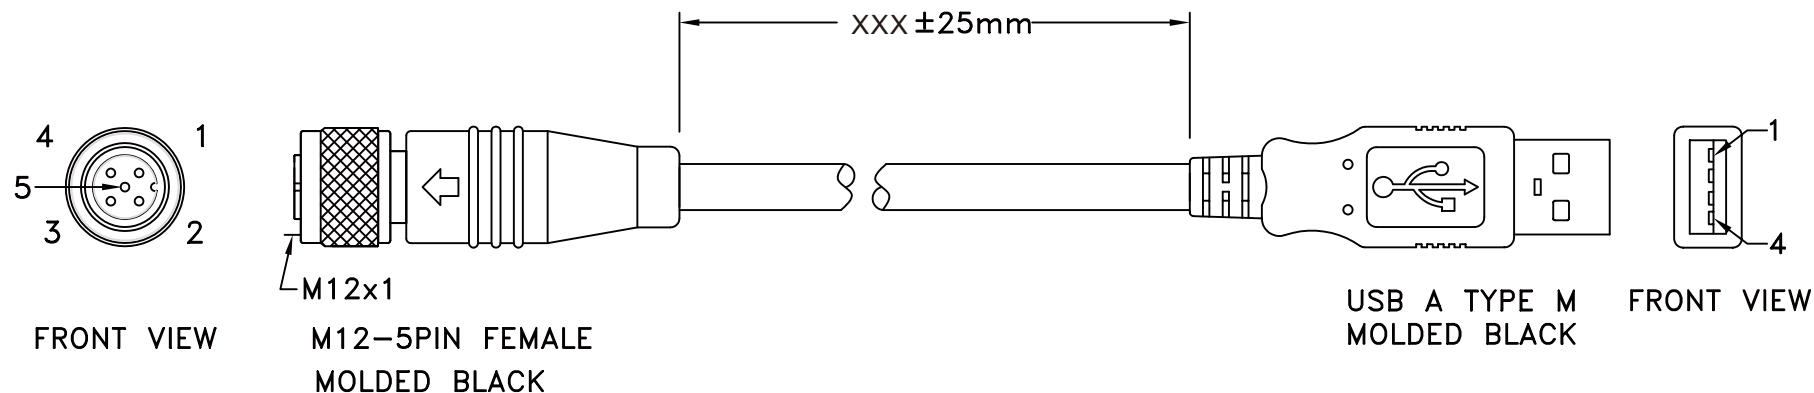

***CONSTRUCTION:

1.CABLE: * UL2725(1PR/28#)+(2C/24#)+AEB65% OD:4.7mm BLACK COLOR.

***CONNECTORS:

2.M12-5PIN: * M12-5PIN FEMALE SOLDER TYPE.
 * PIN: BRASS WITH GOLD FLASH.
 * INSULATOR: BLACK NYLON 66 UL 94V-0 RATED.
 * COUPLING NUT: M12x1 BRASS WITH NICKEL PLATED.
 * GASKET: SILICONE RUBBER BLACK COLOR.

* FERRULE: BRASS WITH NICKEL PLATED.
 * MOLDED: PVC 45P BLACK COLOR.
 3.USB A/M: * USB "2.0" A TYPE MALE SOLDER TYPE.
 * PINS: BRASS WITH 30u GOLD PLATED.
 * INSULATOR: WHITE COLOR P.B.T UL 94-0 RATED.
 * SHELL: STEEL WITH NICKEL PLATED.
 * MOLDED: PVC 45P BLACK COLOR.

4.TEST: * CT: 2 Ohm. IS: 5M Ohm.

5.PACKING: * PACK EACH CABLE IN A POLY BAG.

6.MATERIAL: * MATERIAL WITH RoHS GRADE.

PIN OUT

M12-5P/F		USB A/M
1	RED 24#	1
2	WHITE 28#	2
4	GREEN 28#	3
3	BLACK 24#	4

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PJECTION



ORDER INFORMATION

M12UB-05044A2428-Axxx

SERIES

2M:2 MTR
 3M:3 MTR
 FEMALE TO MALE
 24&28 AWG
 4 PIN A TYPE
 5P4C

DESCRIPTION: M12-5PIN FEMALE TO USB A TYPE MALE