
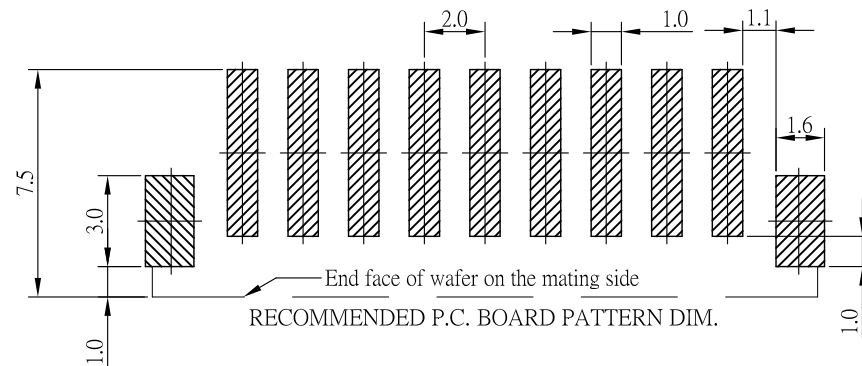
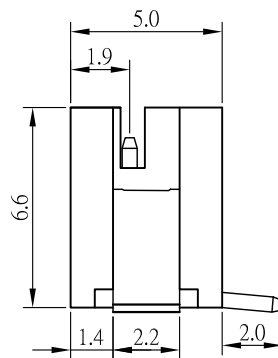
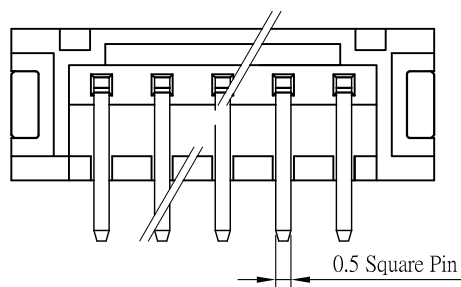
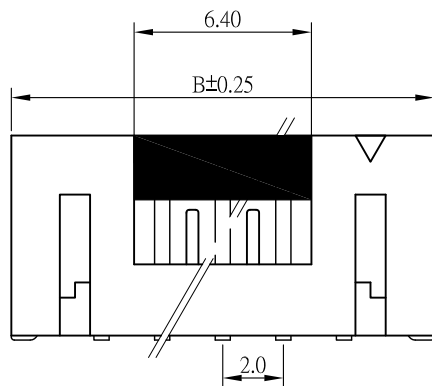


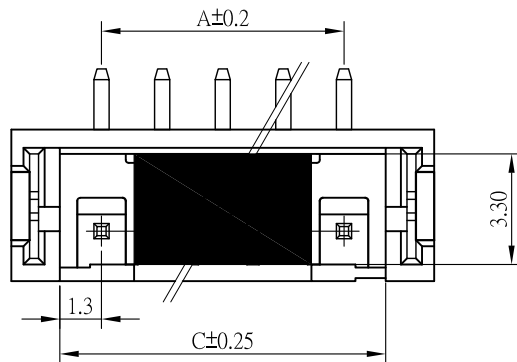

SPECIFICATIONS

Electrical

Voltage Rating: 100V AC, DC

Current Rating: 2A AC, DC

Withstand Voltage: 800V AC/ min

Insulation Resistance: 1000M Ω / min

Temperature Range: -25°C ~ +85°C

Material

Wafer: High Temperature Plastic Nylon 6T UL94V-0

Pin: High Strength Brass With Tin Over Nickel Plated

Applicable PC Board Thickness: 0.8 ~ 1.6mm

Contact Resistance: Initial Value / 10m Ω max.

After environmental testing 20m Ω max.

CKT.	A	B	C
2	2.00	8.00	4.80
3	4.00	10.00	6.80
4	6.00	12.00	8.80
5	8.00	14.00	10.80
6	10.00	16.00	12.80
7	12.00	18.00	14.80
8	14.00	20.00	16.80
9	16.00	22.00	18.80
10	18.00	24.00	20.80
11	20.00	26.00	22.80
12	22.00	28.00	24.80
13	24.00	30.00	26.80
14	26.00	32.00	28.80
15	28.00	34.00	30.80
16	30.00	36.00	32.80

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.35
.XX $\pm$ 0.25
.XXX $\pm$
ANG $\pm$



PPOJECTION



ORDER INFORMATION

PH-VCR-xx-LF
SERIES REEL
CAP 180° SMT
LEADFREE
02~16 WAY

DESCRIPTION: 2.0mm Wire-to-Board Header SMD 180° SM3 Type

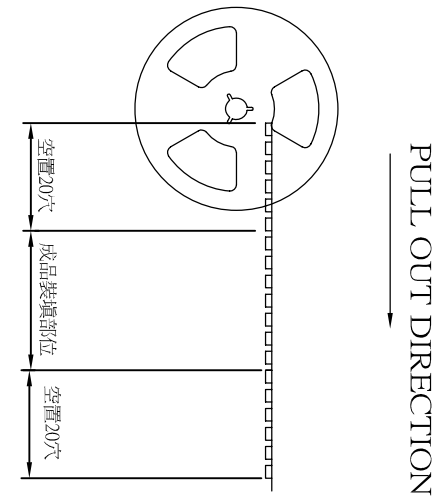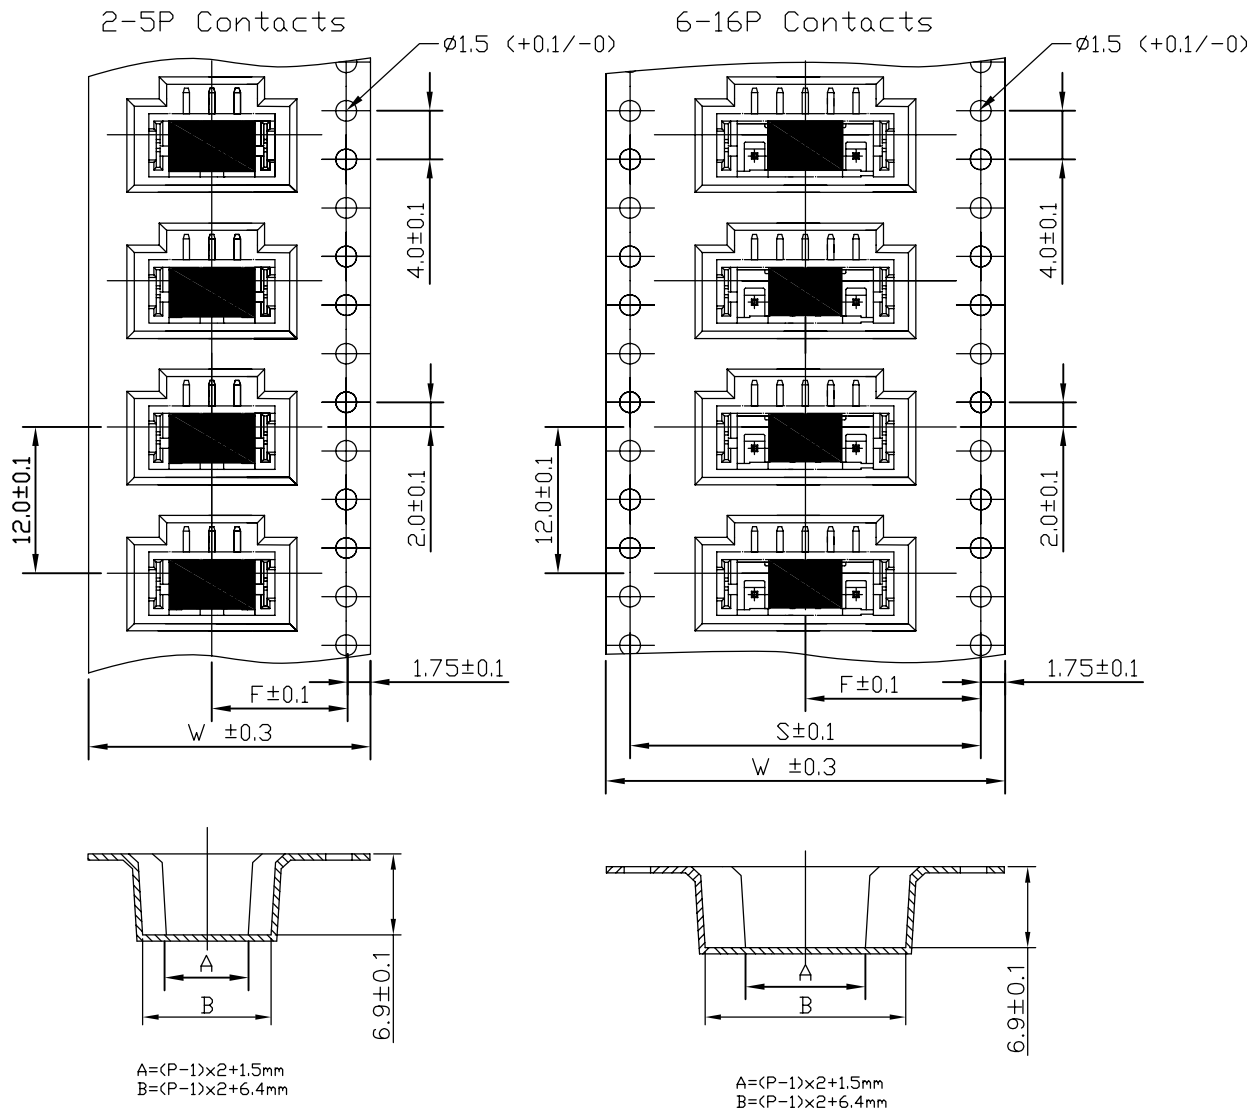

P=Poles	W	F	S	Q'TY/Reel
02	24	11.5		1000PCS
03	24	11.5		1000PCS
04	24	11.5		1000PCS
05	24	11.5		1000PCS
06	32	14.2	28.4	1000PCS
07	32	14.2	28.4	1000PCS
08	32	14.2	28.4	1000PCS
09	32	14.2	28.4	1000PCS
10	44	20.2	40.4	1000PCS
11	44	20.2	40.4	1000PCS
12	44	20.2	40.4	1000PCS
13	44	20.2	40.4	1000PCS
14	44	20.2	40.4	1000PCS
15	56	26.2	52.4	1000PCS
16	56	26.2	52.4	1000PCS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
 .X $\pm$ 0.35
 .XX $\pm$ 0.25
 .XXX $\pm$
 ANG $\pm$



ORDER INFORMATION

PH-VCR-xx-LF
 SERIES REEL
 CAP 180° SMT
 LEADFREE
 02~16 WAY

DESCRIPTION: 2.0mm Wire-to-Board Header SMD 180° SM3 Type

煜倫股份有限公司

www.morethanall.com