


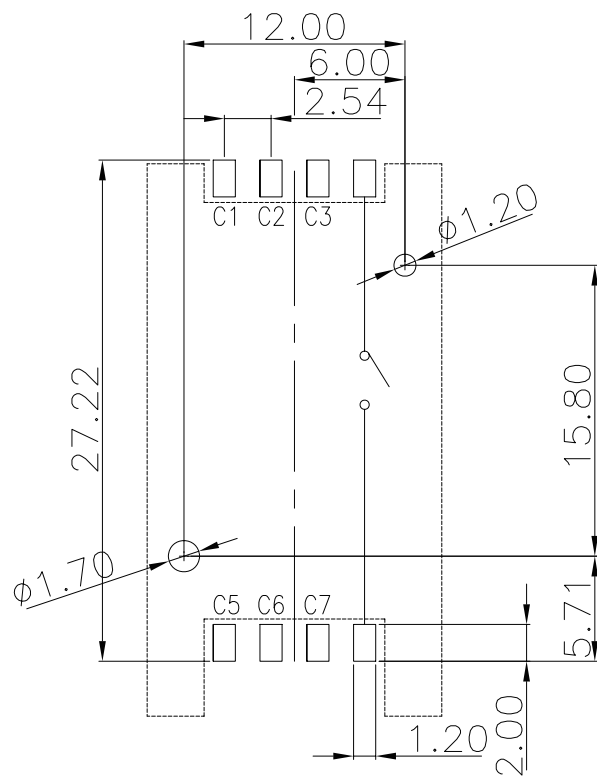
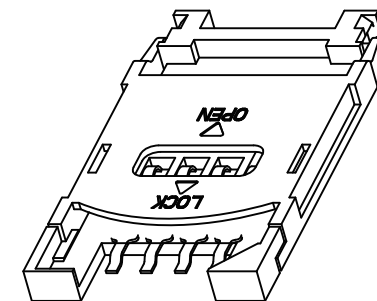


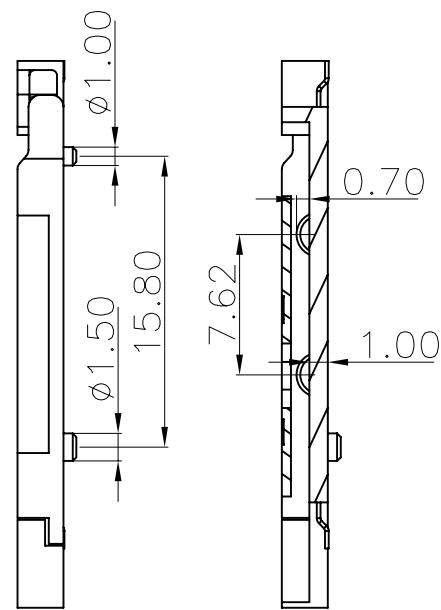

RECOMMENDED PCB LAYOUT

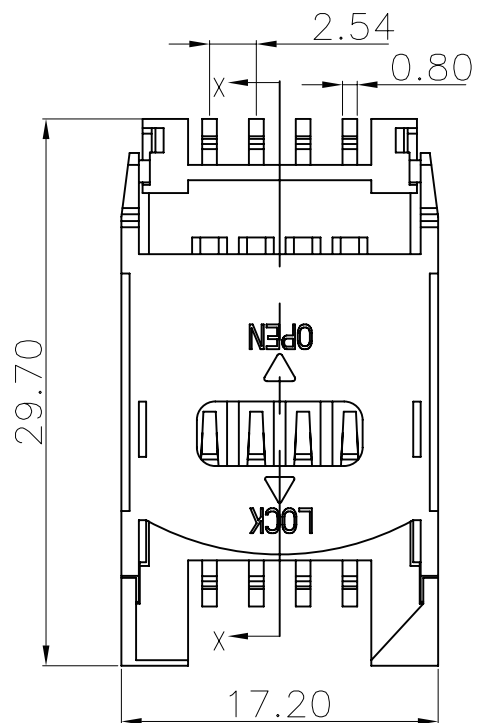

PART NAME	Q'TY	Material
HOUSING	1	LCP+30%GF
COVER	1	LCP+30%GF
CONTACT	8	C5210R-EH,GOLD 5u'

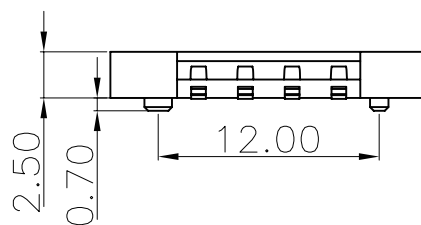

NOTE:

- 1.GENERAL CHARACTERISTICS
DURABILITY:5000 CYCLES.
OPERATIO TEMPERATURE:-25°C TO +85°C.
- 2.ELECTRICAL CHARACTERISTICS
CONTACT RESISTANCE:30M OHMS MAX.
INSULATION RESISTANCE:>1000M OHMS MIN /500V DC.
RATED CURRENT:0.5A MAX.
WITHSTANDING DIELECTRIC VOLTAGE:500V AC R.M.S FOR 1MINUTE.
- 3.SOLDERABILITY
MAX PROCESSING TEMP:260°C FOR 10 SEC.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

SCV-W2525PB-06-LF

SERIES 90°SMT PAD TO PAD 25.54mm
OPEN SWITCH WITH LOCATING PEG
06WAY LEADFREE
BODY HIGH 2.5mm

DESCRIPTION: SIM Card Socket Hinge Type with Switch Function