
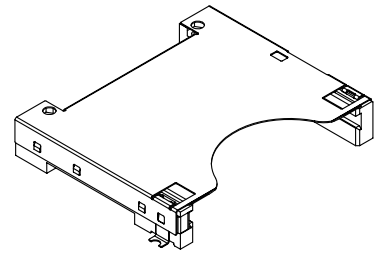
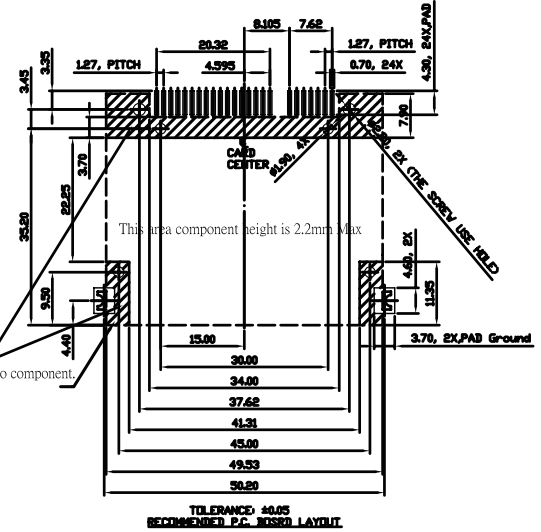


Section view A-A

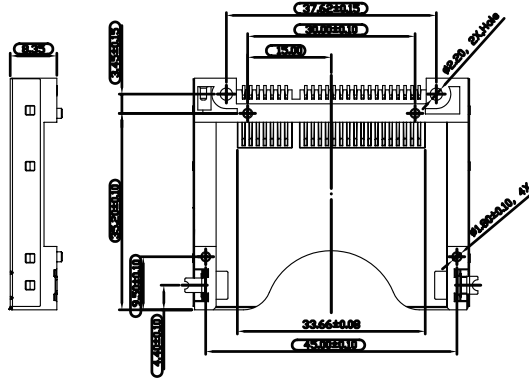


NOTES:

- 1. MATERIAL:
 - 1-1 Housing : Engineering plastic , LCP with G.F reinforced , black per UL 94V-0 rate.
 - 1-2 Terminal : Phosphor Bronze , per JIS 5210 , 0.2t
 - 1-3 Metal cover : Stainless steel sheet SUS304 0.2t.
- 2. PLATING:
 - Contact area: 0.254 μm (10 μ "minimum) or 0.762 μm (30 μ ") gold plating
 - Solder zone: 2.54 μm (100 μ ") matte Tin 1.27 μm (50 μ ") min. Nickel underplating over all.
- 3. RoHS compliant products.
- 4. OPERATING TEMPERATURE: -40°C~+85°C

- 1. CONTACT TYPE: Male
- 2. CONTACT NUMBER: 24
- 3. SHELL MATERIAL: Stainless steel 8.35H
- 4. SOLDER TAILS AREA PLATING: TIN

RoHS Compliant

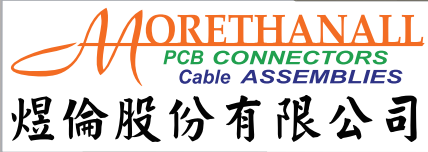


www.morethanall.com

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT/ mm SCALE 1:1
 DATE
 SIZE A4

TOLERANCES ARE
 X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ±



ORDER INFORMATION

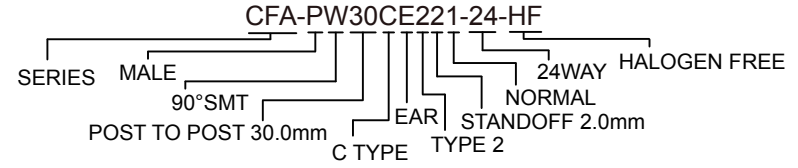

DESCRIPTION: CFAST HOST CONNECTOR MANU TYPE II,8.35H