

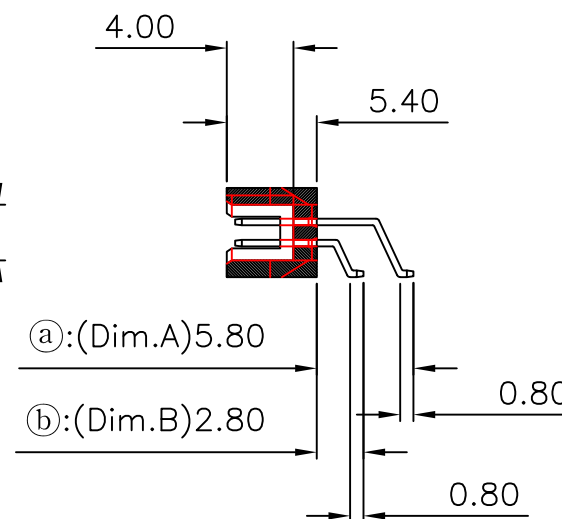
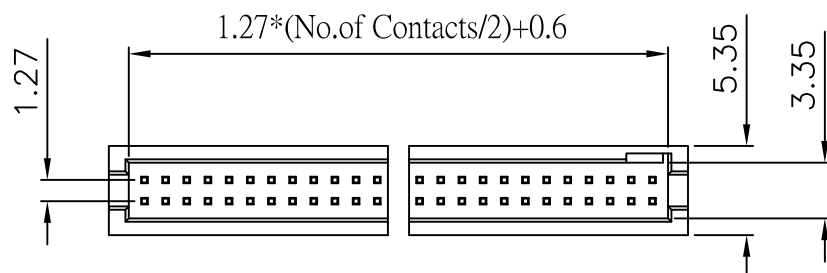
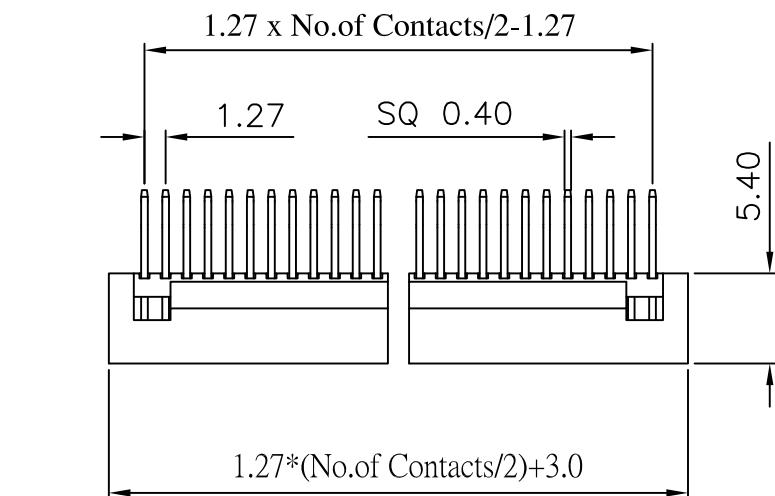


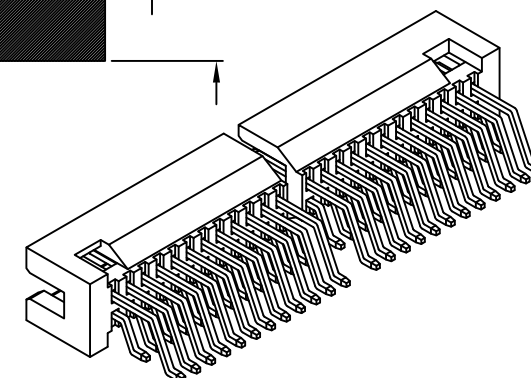

Recommended P.C. Board SMD Layout

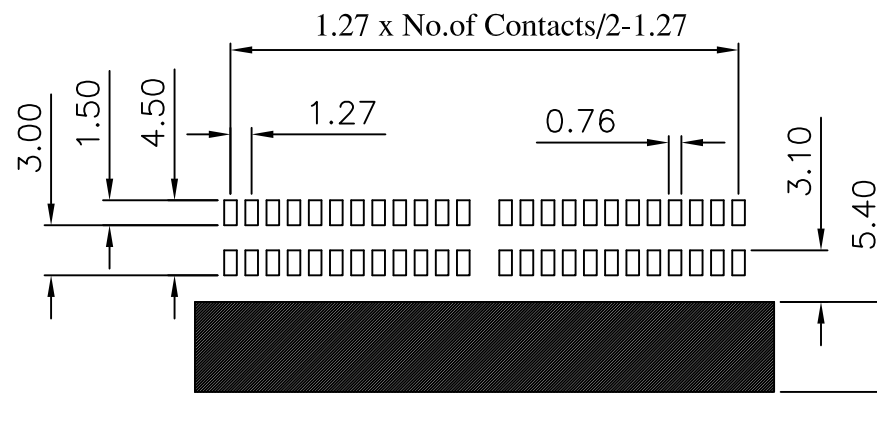

Current Rating:	1 Amps
Insulator Resistance:	5000 Megohms min
Contact Resistance:	20 m ohms max
Dielectric Withstanding:	500 V AC
Operating Temperature:	- 40° ~ +105° C
Max Processing Temp:	230° C for 60 seconds
Max Processing Temp:	260° C for 10 seconds
Contact Material:	Copper Alloy
Insulator Material:	High Temperature Polyester, UL 94V-0

Finish: Tin, Gold Plated
Standard: Gold Flash all over

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

P PROJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

PAB-WX-2Xxx-LF
SERIES LEADFREE
2X03:06WAY
2X50:100WAY
NON POST
90° SMT

DESCRIPTION: