

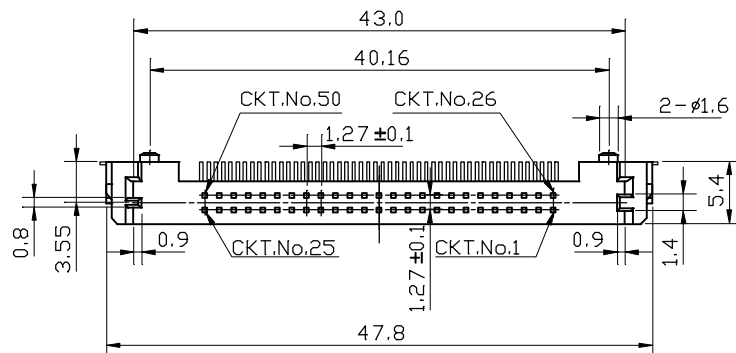
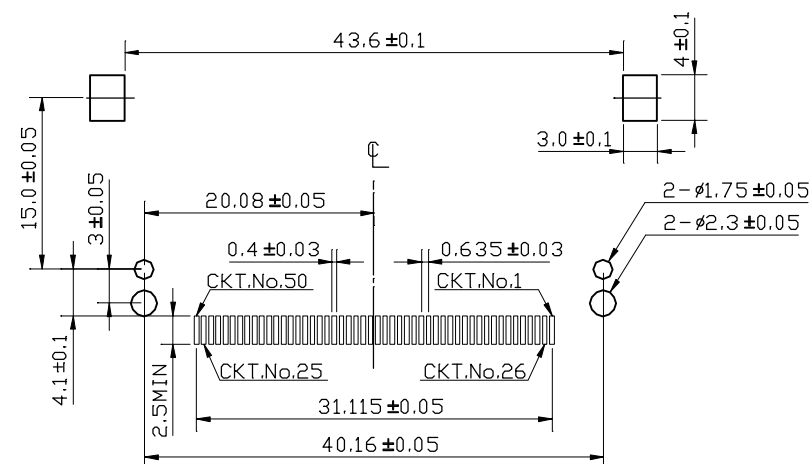
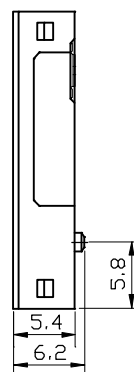


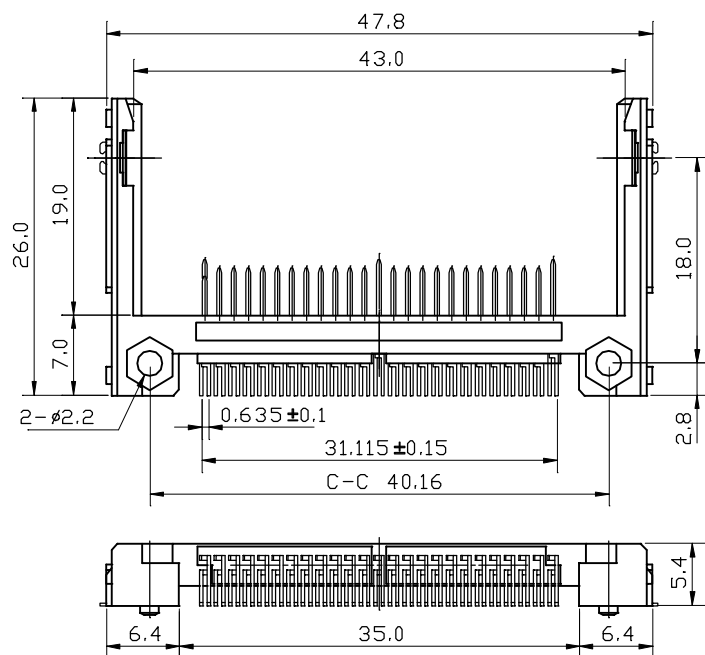

NOTES:
 MATERIAL
 Insulator:Glass Reinforced LCP UL94V-0
 Contacts:Brass Alloy
 Mount ear:Brass ; Tin plated overall
 CONTACT PLATING
 Contact area: Gold plating over 40u" Nickel
 Solder tail area:100u" tin plating over 40u" Nickel

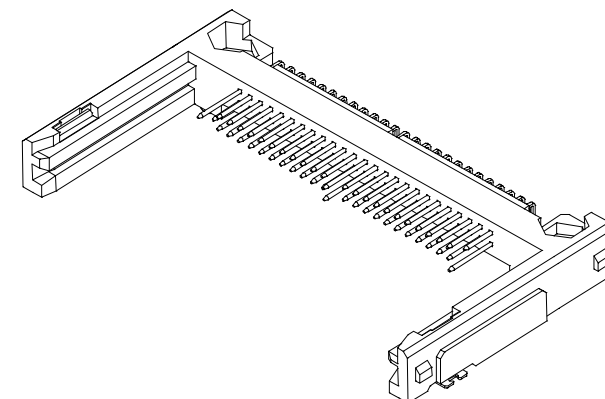

RECOMMENDED P.C.B. LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

CFC-PW40BE111-50-LF
 SERIES MALE 90°SMT TYPE 1 EAR B TYPE POST TO POST 40.16mm
 LEADFREE 50WAY NORMAL STANDOFF 1.7mm

DESCRIPTION: CF CARD HEADER SMT 50P TYPE I (G0)