
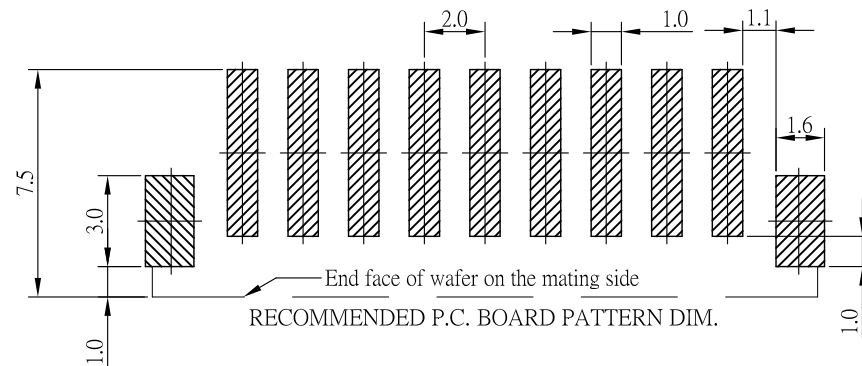
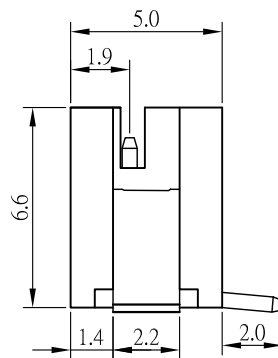
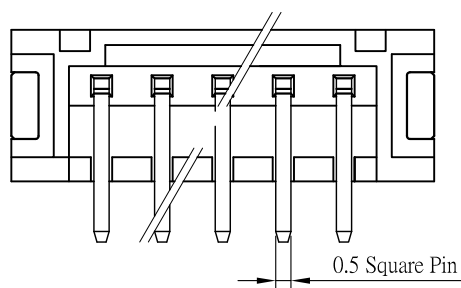
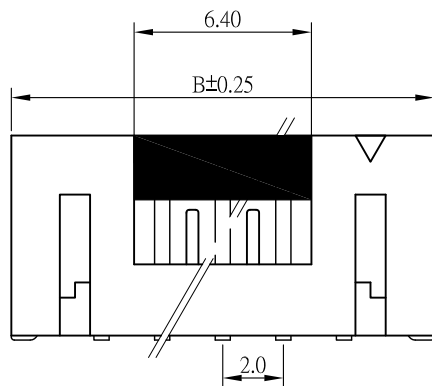


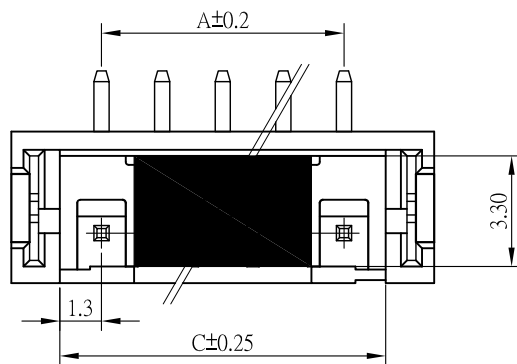

SPECIFICATIONS

Electrical

Voltage Rating: 100V AC, DC

Current Rating: 2A AC, DC

Withstand Voltage: 800V AC/ min

Insulation Resistance: 1000M Ω / min

Temperature Range: -25°C ~ +85°C

Material

Wafer: High Temperature Plastic Nylon 6T UL94V-0

Pin: High Strength Brass With Tin Over Nickel Plated

Applicable PC Board Thickness: 0.8 ~ 1.6mm

Contact Resistance: Initial Value / 10m Ω max.

After environmental testing 20m Ω max.

CKT.	A	B	C
2	2.00	8.00	4.80
3	4.00	10.00	6.80
4	6.00	12.00	8.80
5	8.00	14.00	10.80
6	10.00	16.00	12.80
7	12.00	18.00	14.80
8	14.00	20.00	16.80
9	16.00	22.00	18.80
10	18.00	24.00	20.80
11	20.00	26.00	22.80
12	22.00	28.00	24.80
13	24.00	30.00	26.80
14	26.00	32.00	28.80
15	28.00	34.00	30.80
16	30.00	36.00	32.80

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.35
.XX $\pm$ 0.25
.XXX $\pm$
ANG $\pm$

PPOJECTION



ORDER INFORMATION

PH-VC-xx-LF
SERIES | T LEADFREE
| 02~16 WAY
CAP
180° SMT

DESCRIPTION: 2.0mm Wire-to-Board Header SMD 180° SM3 Type