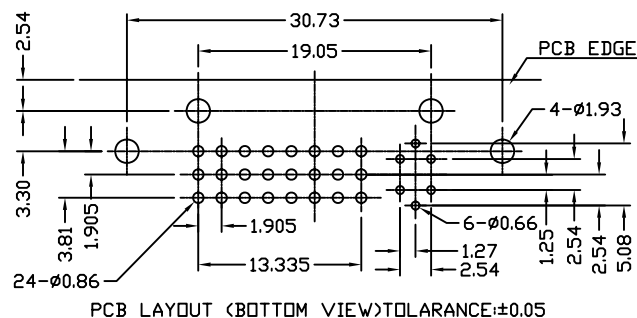
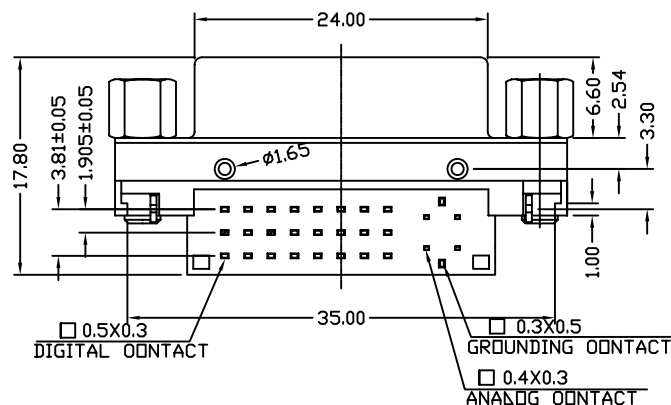
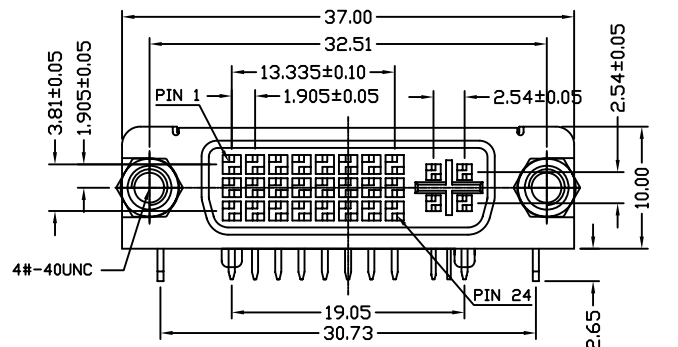


NOTES:

1.MATERIALS:

INSULATOR: GLASS FIBER REINFORCED THERMOPLASTIC
LCP UL94V-0.
CONTACT: PHOSPHOR BRONZE, GOLD FLASH ON CONTACT,
TIN PLATED ON TAIL 100μ", OVER NICKEL PLATED 50μ".
SHELL: SPCC, NICKEL PLATED.
BOARD LOCK: BRASS, TIN PLATED.
RIVET: BRASS, NICKEL PLATED.

2.ELECTRICAL:

INSULATION RESISTANCE: 1000 MEGOHMS MINIMUM
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
VOLTAGE RATING: 40 VOLTS AC(RMS) MAXIMUM
CURRENT RATING: 3.0 AMPS PER CIRCUIT
CONTACT RESISTANCE: 20 MILLIOHMS MAXIMUM

3.MECHANICAL PERFORMANCE:

MATING FORCES: 4.5kgf MAXIMUM
UNMATING FORCES: 1kgf MINIMUM, 4kgf MAXIMUM
DURABILITY: 100 CYCLES MINIMUM

4.ENVIRONMENTAL:

TEMPERATURE RANGE: -20°C TO +85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X, ±

.X ±

.XX ±

.XXX ±

ANG ±



ORDER INFORMATION

DVI-SRJN-24+5-LF
SERIES | JACKSCRW | LEADFREE
FEMALE | 24+5 PIN
NUT
DIP 90°

DESCRIPTION: DVI 24+5Pin 90度母座半金貝吉色無後鐵殼(BC)鎖螺絲