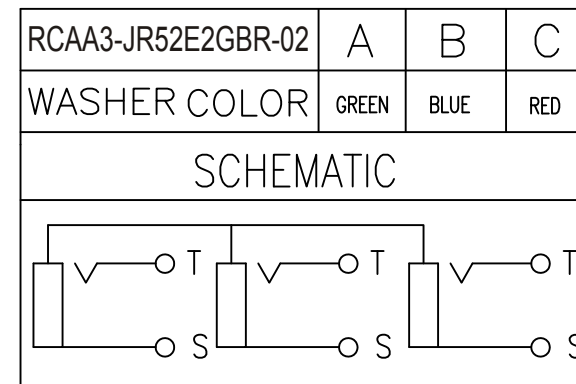
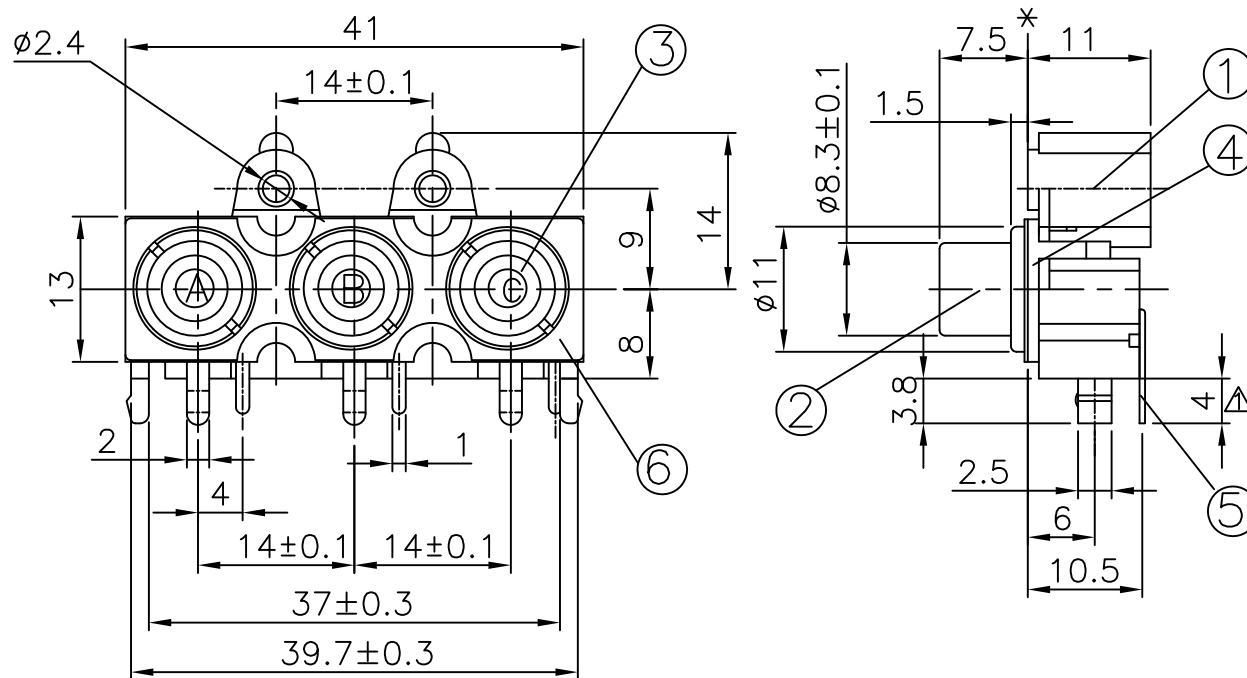


T:1.6 Dimensions of PC board holes

Tolerance : ± 0.1 (Printed-Top view)

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

6	SEALED PLATE	1	C2680	t=0.3	MB:Cu Cu/Sn PLATED
5	TERMINAL	3	C2680	t=0.5	MB:Cu Cu/Sn PLATED
4	COVER	2	ABS		UL-94HB
3	WASHER	3	ABS		UL-94HB
2	OUTER CONTACT	3	C2680	t=0.4	MB:Cu Cu/Sn PLATED
1	HOUSING	1	ABS		UL-94HB
LTR	PART NAME	QTY	MATERIAL	REMARK	

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION



ORDER INFORMATION

RCAA3-JR52E2GBR-02-LF

SERIES

JACK

5.2mm

DIP 90°

EAR

02 WAY

LEADFREE

GREEN/BLUE/RED

DESCRIPTION: PIN JACK