
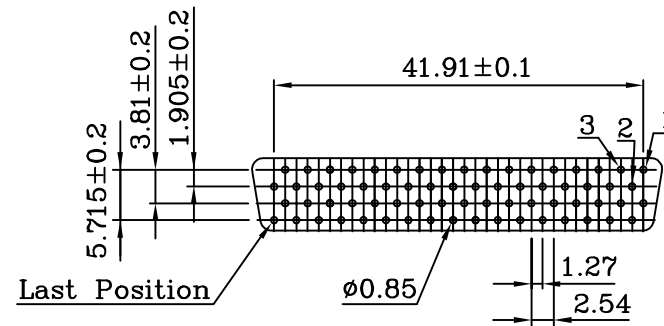

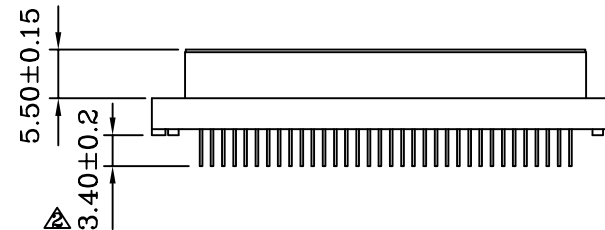


● **MATERIALS: (RoHS Compliant)**


Housing: Plastic Thermoplastic
 P.B.T UL94V-0 Black
 Contacts: Phosphor Bronze Gold
 Selective Plated

● **ELECTRICAL CHARACTERISTICS:**

Contact Current Rating: 0.5 Amp
 Dielectric Withstanding Voltage: 500V AC
 Insulation Resistance: >500MΩ/Min
 Contact Resistance: 35mΩ/Max
 Operation Temperature: -55°C ~ +85°C

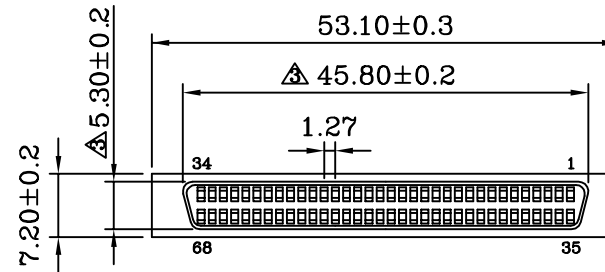

PCB Layout (B)



RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

ORDER INFORMATION

HPDP-SD-068-LF

SERIES | LEADFREE
 68 WAY
 DIP 180°
 FEMALE

DESCRIPTION: 1.27mm (.050") Pin Type 68Pos
 Receptacles Headers Vertical Mount Type (Unshielded)