


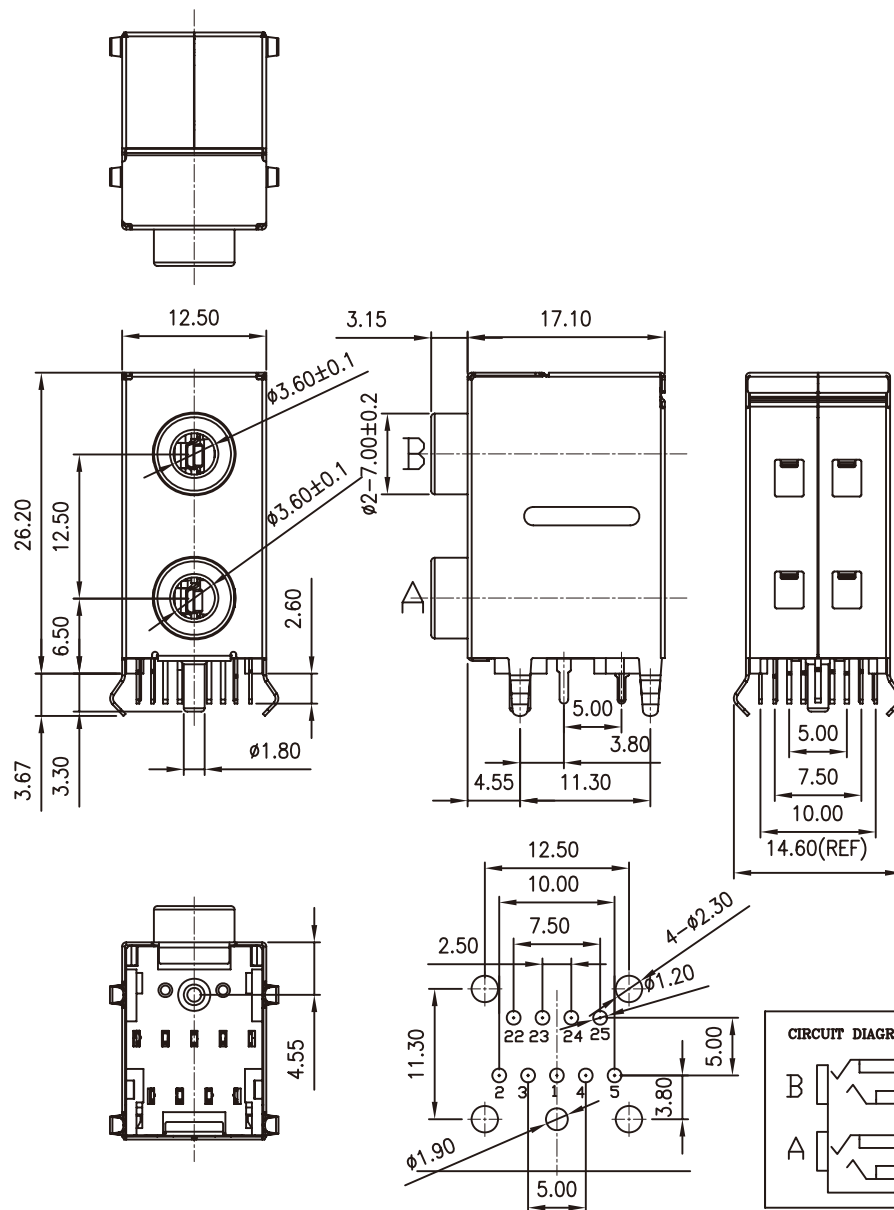

SPECIFICATIONS:


1.MECHANICAL

- a.INSERTION FORCE:0.4Kgs TO 3.0 Kgs
- b.EXTRACTION FORCE:0.4Kgs TO 3.0 Kgs
- c.ENDURANCE:5000 CYCLES

2.ELECTRICAL



- a.DIELECTRIC WITHSTANDING VOLTAGE:500V AC 1 MINUTE.
- b.INSULATION RESISTANCE:100M
- c.CONTACT RESISTANCE:30 m

3.OPERATING TEMPERATURE: -25 TO +85 °C.

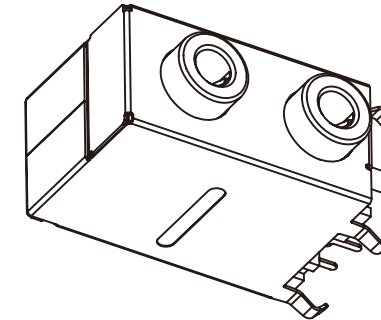

16	BACK SHELL	SPCC T=0.2mm	1	NI
15	SHELL	SPCC T=0.25mm	1	NI
14	BACK COVER	PBT (BLACK)	1	—
13	TER' -24	BRASS T=0.40mm	1	Sn
12	TER' -23	BRASS T=0.40mm	1	Sn
11	TER' -4	BRASS T=0.40mm	1	Sn
10	TER' -3	BRASS T=0.40mm	1	Sn
9	TER' -25	PHOSPHOR BRONZE T=0.25mm	1	Sn
8	TER' -22	PHOSPHOR BRONZE T=0.25mm	1	Sn
7	TER' -5	PHOSPHOR BRONZE T=0.25mm	1	Sn
6	TER' -2	PHOSPHOR BRONZE T=0.25mm	1	Sn
5	TER' -1	BRASS T=0.5mm	1	GOLD1U" Sn100u"
4	BASE-B	PBT (BLACK)	1	—
3	BASE-A	PBT (BLACK)	1	—
2	COVER	PA46 (BLACK)	1	—
1	Housing	PBT (BLACK)	1	—
NO.	PART NAME	MATERIAL	Q' TY	PLATING

RECOMMENDED PCB LAYOUT

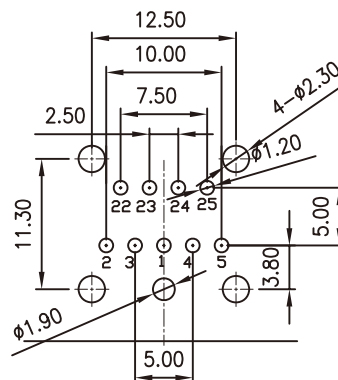

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

PJB1-RFKK-09-LF
SERIES
DIP 90°
LEADFREE
09 WAY
BLACK
BLACK
FULL METAL

DESCRIPTION: MINIATURE JACK