
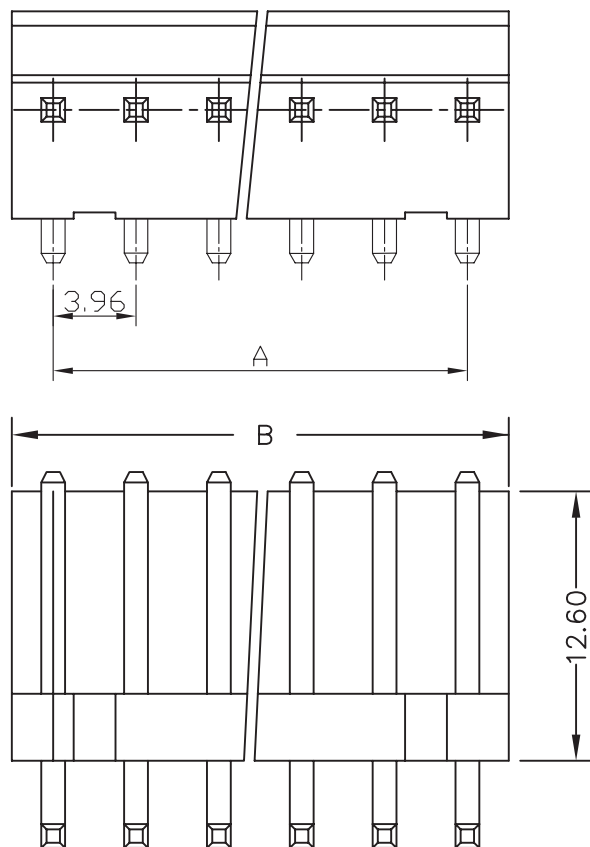


RECOMMENDED P.C.BOARD HOLE DIMM.

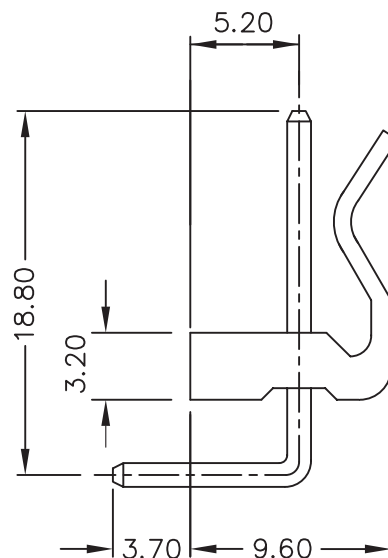

註
2P-10P公差值為±0.3mm
11P-20P公差值為±0.5mm

SPECIFICATIONS

Electrical

Current Rating: 5A AC, DC

Voltage Rating: 250V AC, DC

Operating Temp.: -25°C ~ +85°C

Insulation Resistance: 1000M Ω / min.

Dielectric Withstanding Voltage: 1500V AC/ min.

Contact Resistance: 10m Ω / max.

Material

Material: Nylon66, UL94V-2

Poles	Dimension mm (in.)		Part No.	Note.
	A	B		
2	3.96	8.00	KK-R-02	
3	7.92	12.00	KK-R-03	
4	11.88	15.90	KK-R-04	
5	15.84	20.00	KK-R-05	
6	19.80	24.00	KK-R-06	
7	23.76	27.90	KK-R-07	
8	27.72	31.90	KK-R-08	
9	31.86	35.80	KK-R-09	
10	35.64	39.90	KK-R-10	
11	39.60	43.90	KK-R-11	
12	43.56	47.80	KK-R-12	
13	47.52	51.80	KK-R-13	
14	51.48	55.70	KK-R-14	
15	55.44	59.80	KK-R-15	
16	59.40	63.80	KK-R-16	
17	63.36	67.70	KK-R-17	
18	67.32	71.70	KK-R-18	
19	71.28	75.60	KK-R-19	
20	75.24	79.80	KK-R-20	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE


SIZE A4

PPOJECTION

X. ± 0.30
.X ± 0.30
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

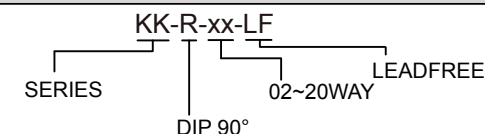

DESCRIPTION: 3.96mm Wire-to-Board Header Dip 90° Type