

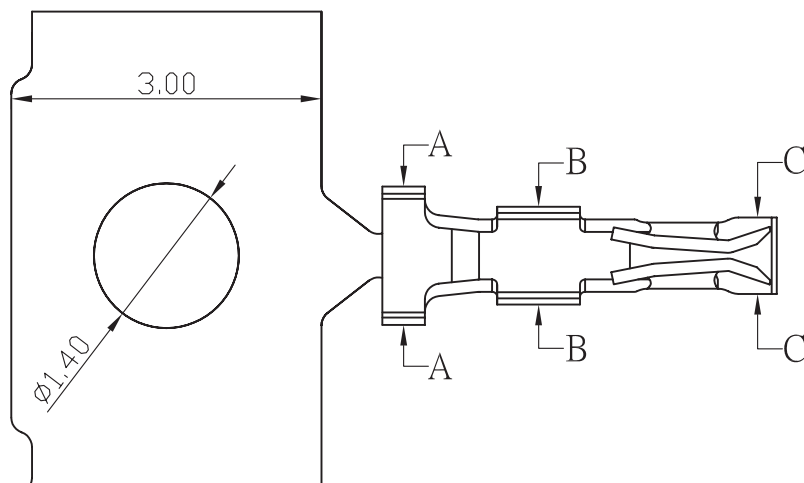



Section B—B



Section A—A

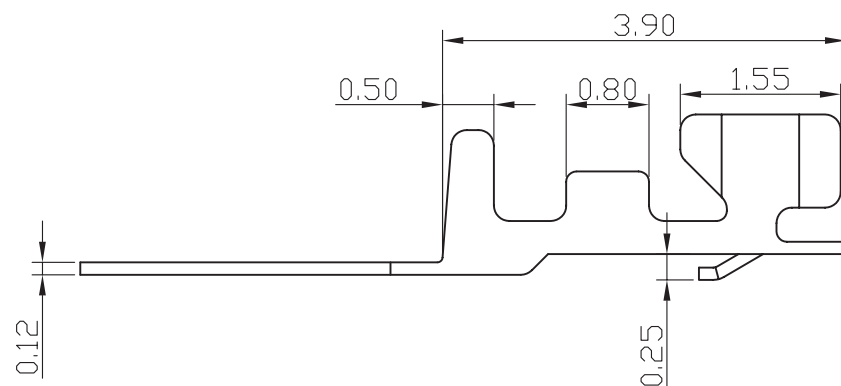

Section C—C

SPECIFICATIONS

Electrical

Current Rating: 1A AC, DC

Voltage Rating: 50V AC/ max.

Operating Temp.: -25°C ~ +85°C

Insulation Resistance: 100M Ω / min.

Dielectric Withstanding Voltage: 500V AC/ min.

Contact Resistance: 20M Ω / max.

Material

Terminal material: Phosphor Bronze/ Tin-plated

Wire Range: 28 to 32AWG

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

DATE

SCALE 1:1


SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

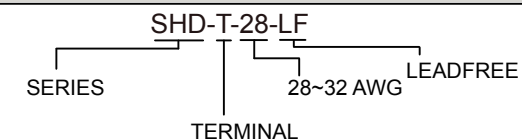

DESCRIPTION: