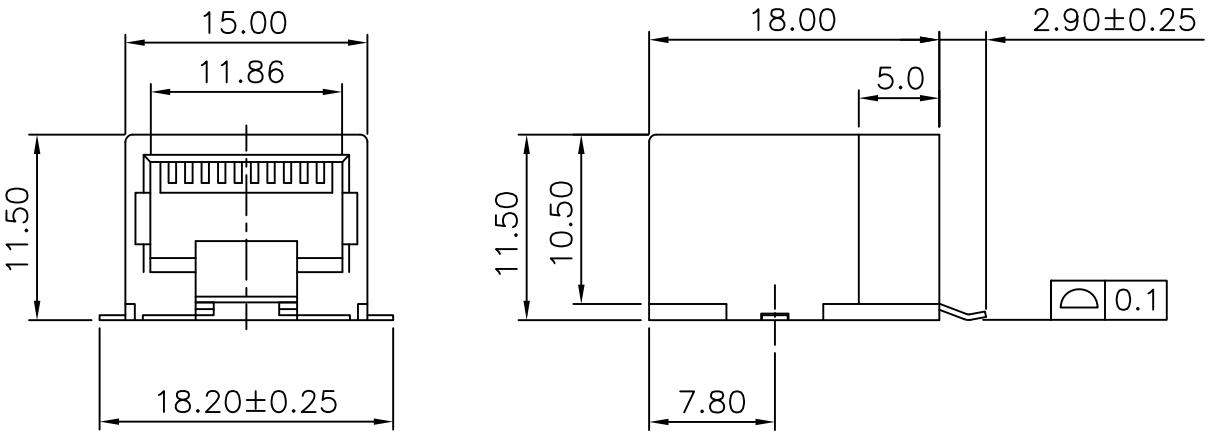

MATERIAL:

- HOUSING—DSM STANYL TE250F6 (NYLON—46)
  HEAT DEFLECTION TEMP.290°
  BLACK COLOR, UL94V—0
- CONTACTS—0.35mm THICK PHOS—BRONZE
  PLATED WITH HARD GOLD AND
  GOLD FLASH IN SOLDER AREA.
- HOLD DOWN—0.30mm THICK COPPER ALLOY,
  PLATED WITH TIN.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68,SUBPART F.

- SOLDERING TEMPERATURE 260°C±5°C, 5 SEC.

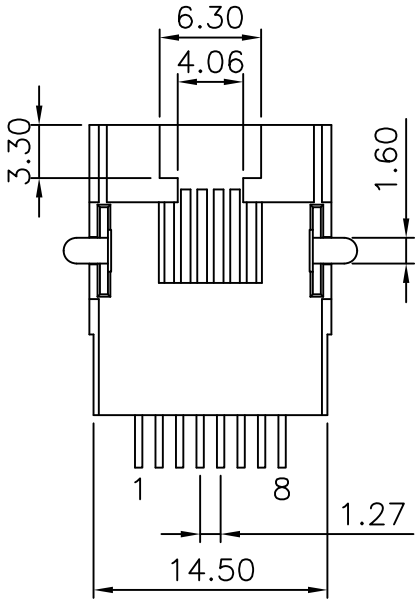

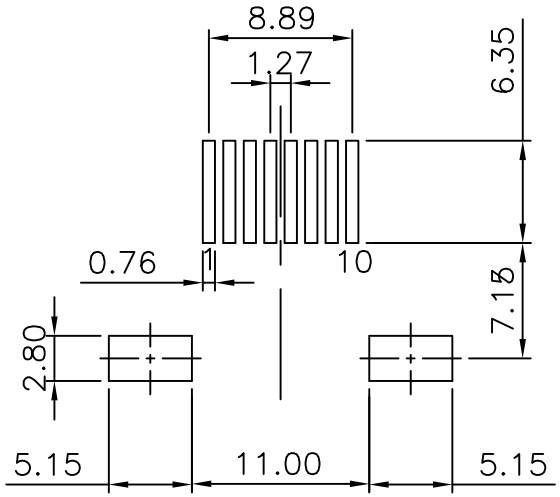

PCB LAYOUT

Ref.

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ±
.X ±
.XX ±
.XXX ±
ANG ±

ORDER INFORMATION

MJW11-KX06R-0808-LF

- SERIES
- BLACK
- NON EAR
- 06u"GOLD
- REEL
- 8P8C
- LEADFREE

DESCRIPTION: 10POSITION, SMT TYPE SIDE ENTRY PCB JACK

MATERIALS:
1.CARRIER-PS (0.40mm THICK TAPE).
2.REEL-2mmTHICK PLASTIC WHEEL.
3.COVER TAPE-PE (0.045mm~0.12mm THICK TAPE).

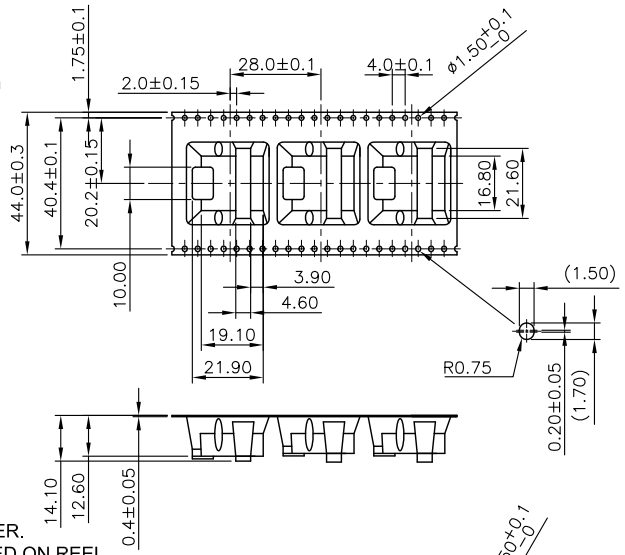

NOTES:
1. 10 EMPTY CAVITIES FOR BOTH OF TOP AND BOTTOM OF THE CARRIER.
2. 180 PCS PRODUCTS BE PACKAGED ON REEL.
3. 軸外保護帶 361-270 (繞二圈).

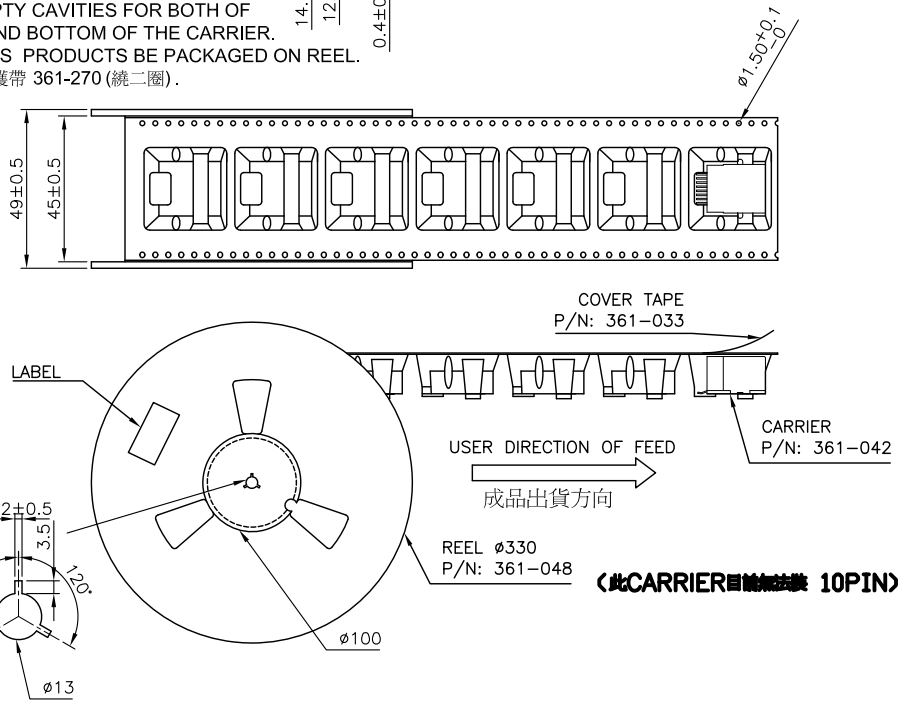

(此CARRIER目前無法供 10PIN)

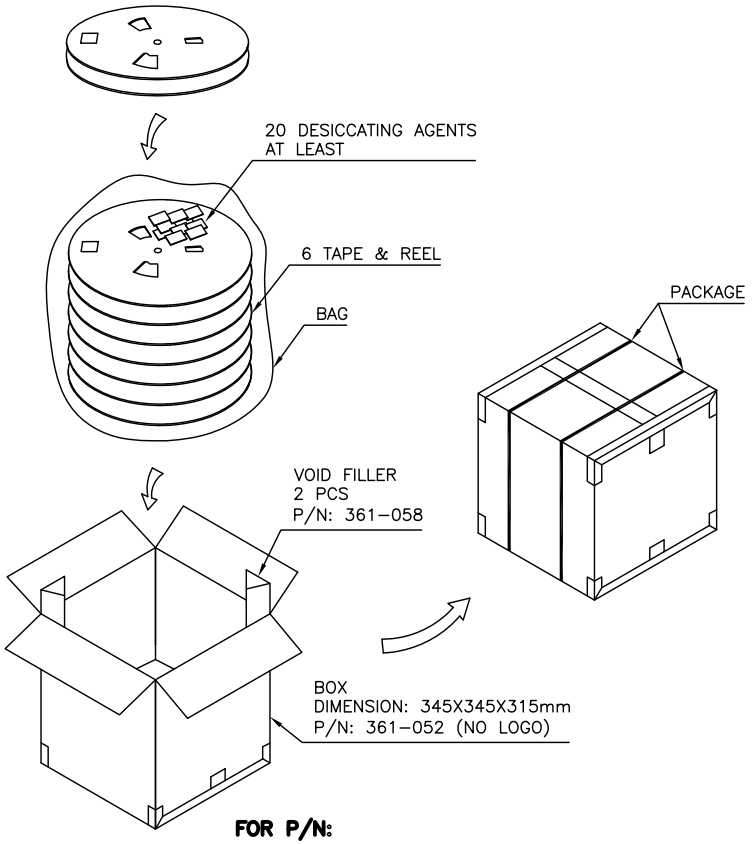

FOR P/N:

– KG	– KG	1080	6	180
GROSS WEIGHT (REF.)	NET WEIGHT (REF.)	PCS/BOX	REELS/BOX	PCS/REEL

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

ORDER INFORMATION

MJW11-KX06R-0808-LF
SERIES
BLACK
NON EAR
06u"GOLD
REEL
8P8C
LEADFREE

DESCRIPTION: 10P8C TAPE & REEL PACKAGE SPEC.