

Recommended P.C.B Layout

MATERIAL

Insulator : NYLON 6T

Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000M Ω Min. at DC 500V

Contact Resistance : 20m Ω Max. at DC 100mA

Operation Temperature : -55°C to + 105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm


SCALE 1:1

DATE


SIZE A4

PJECTION

X. \pm
.X \pm 0.30
.XX \pm 0.15
.XXX \pm
ANG \pm 3°



ORDER INFORMATION

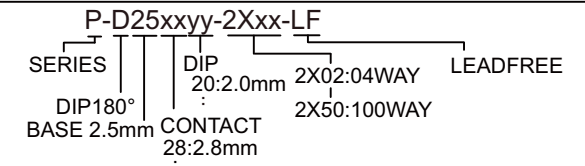

DESCRIPTION: PIN HEADER 1.27*2.54mm STRAIGHT TYPE, DUAL ROWS