

Recommended P.C.B. Layout(Tolerance=±0.05)  
AS VIEW FORM COMPONENT SIDE

TABLE:

SCU-W1025X-06	2.50
SCU-W1026X-06	2.60
SCU-W1027X-06	2.70
SCU-W1028X-06	2.80
SCU-W1029X-06	2.90
SCU-W1030X-06	3.00
SCU-W1031X-06	3.10
SCU-W1032X-06	3.20
SCU-W1036X-06	3.60
PART NO.	DIM A

NOTES:

1. Electrical specifications:

- Contact resistance: 100mOhm max
- Voltage rating (SELV): 15Vdc max
- Current rating: 1A
- Dielectric strength: 500Vrms min. 1min
- Insulation resistance: 10E9Ohm min

2. Climatic characteristics:

- Operation temperature: -40°C to +85°C

3. Mechanical specifications:

- Contact force nominal: 20-50cn
- Mechanical lifetime: 1,500 mating cycles min
- Contact position acc.to GSM

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm


SCALE 1:1

DATE


SIZE A4

PJECTION

X, ±  
.X ± 0.38  
.XX ± 0.25  
.XXX ± 0.20  
ANG ±



ORDER INFORMATION

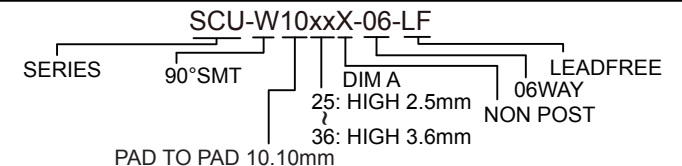

DESCRIPTION: SIM CARD CONNECTOR Wingblack type 6pin