
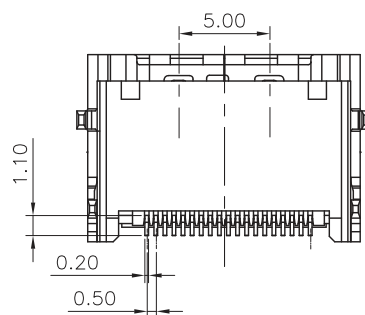
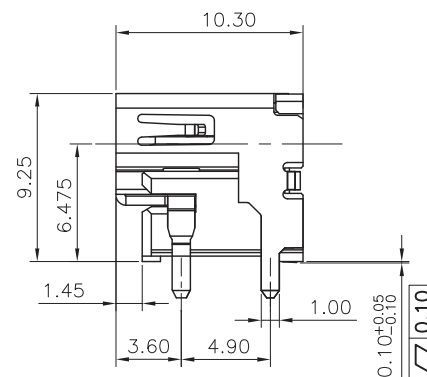
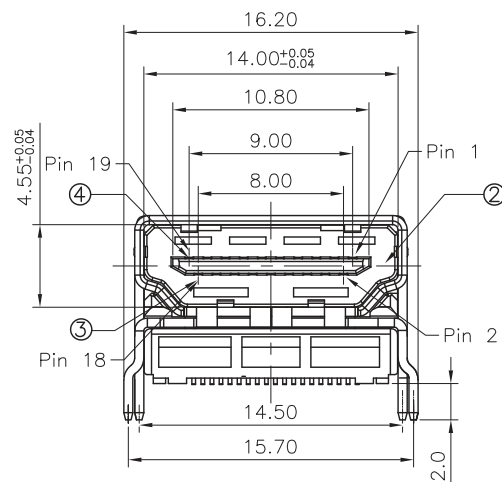


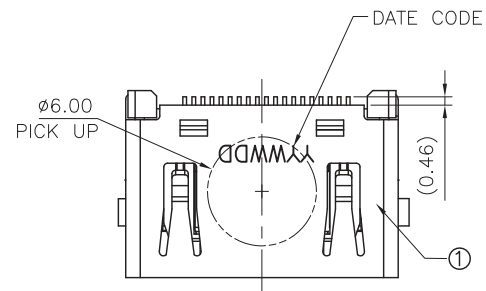

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

HDMI-SWMM15H92-19-LF

SERIES

LEADFREE

19WAY



HIGH 9.25mm

METAL FOOT/1.5mm

90° SMT

FEMALE

DESCRIPTION: HDMI RECEPTACLE SMT TYPE WITH WING LOW PROFILE

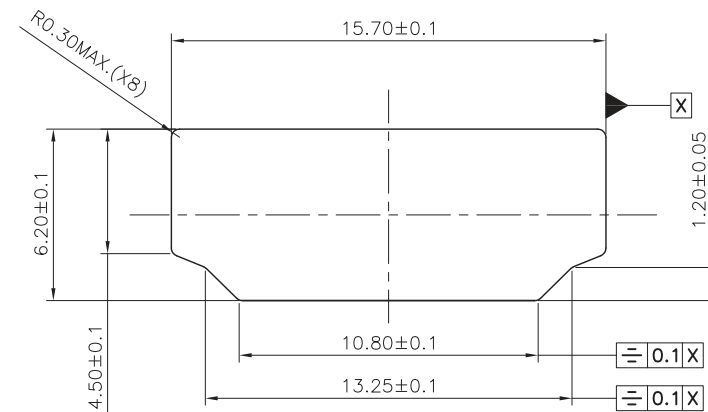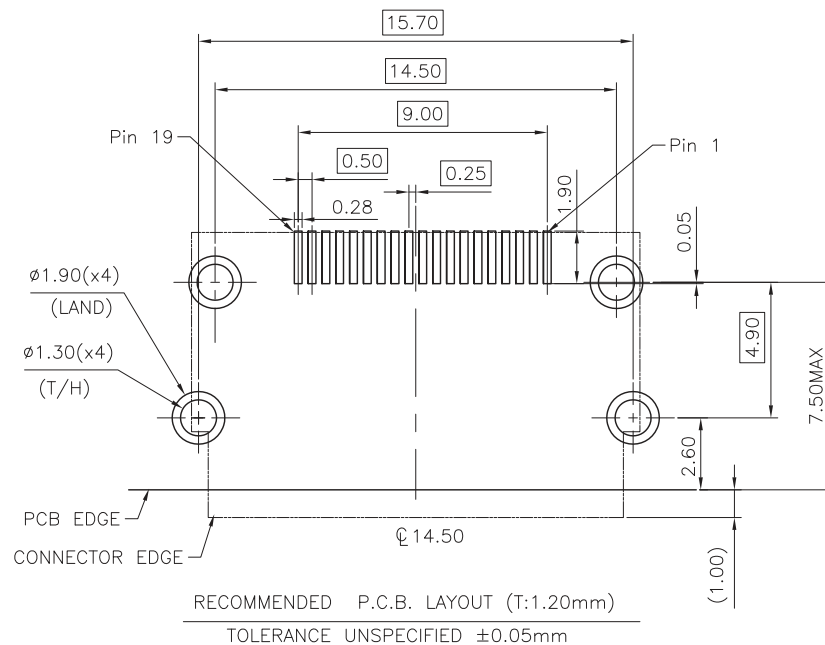

REFERENCE PANEL CUT OUT DIMENSION

SPECIFICATIONS

1. MECHANICAL :
 - 1.1 INSERTION FORCE :44.1 N MAX
 - 1.2 WITHDRAWAL FORCE :9.8 N MIN.
2. ELECTRICAL :
 - 2.1 CONTACT CURRENT RATING: 0.5A MIN.
 - 2.2 VOLTAGE RATING :40V AC (rms)
 - 2.3 WITHSTANDING VOLTAGE:
 - 500Volts AC BETWEEN ADIACENT TERMINAL(UNMATE)
 - 300Volts AC BETWEEN ADIACENT TERMINAL(MATE)
 - 2.4 INSULATION RESISTANCE:
 - 100Mohm MIN.(UNMATED);10Mohm MIN.(MATED)
 - 2.5 CONTACT RESISTANCE: 30 MILLIOHMS MAX.
3. ENVIRONMENTAL :
 - 3.1 OPERATING TEMPERATURE:-25°C TO +85°C

10	COPPER ALLOY	UP CONTACT	④
9	COPPER ALLOY	DOWN CONTACT	③
1	THERMOPLASTIC UL94V-0	HOUSING	②
1	COPPER ALLOY	SHELL	①
QTY'S	SPECIFICATION	PART	ITEM

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$ 0.38
.XX $\pm$ 0.25
.XXX $\pm$
ANG $\pm$ 1°

PPOJECTION

照片框

ORDER INFORMATION

HDMI-SWMM15H92-19-LF

SERIES

LEADFREE

19WAY

HIGH 9.25mm

METAL FOOT/1.5mm

90° SMT

FEMALE

DESCRIPTION: HDMI RECEPTACLE SMT TYPE WITH WING LOW PROFILE