
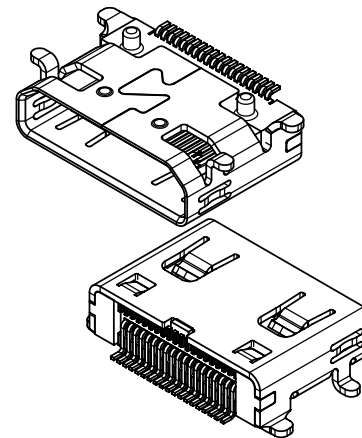


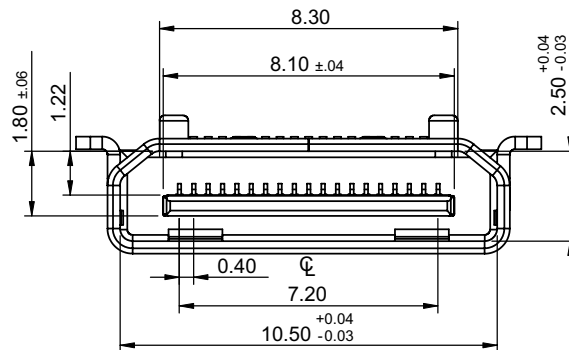

NOTES :

1.Material :

Housing : High temperature thermoplastic,UL94-V0.

Color : White





HDMI Terminal : Copper Alloy.

Cover : Copper Alloy.

2.Finish :

Cover :50 μ" MIN. Ni over all.

3.Coplanarity Must Be Within 0.10 Max.

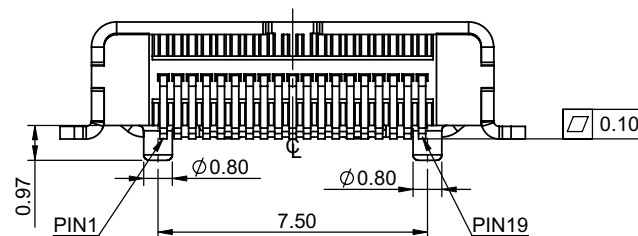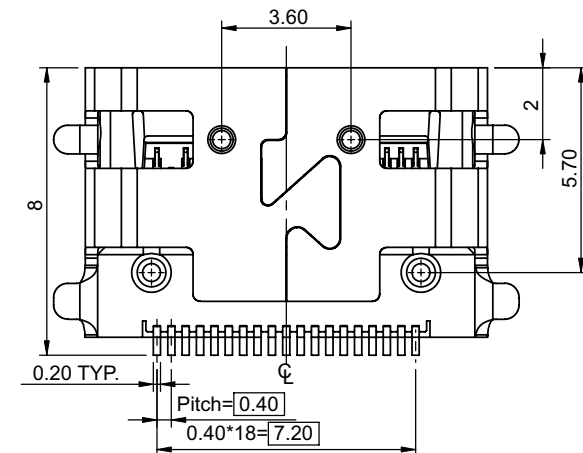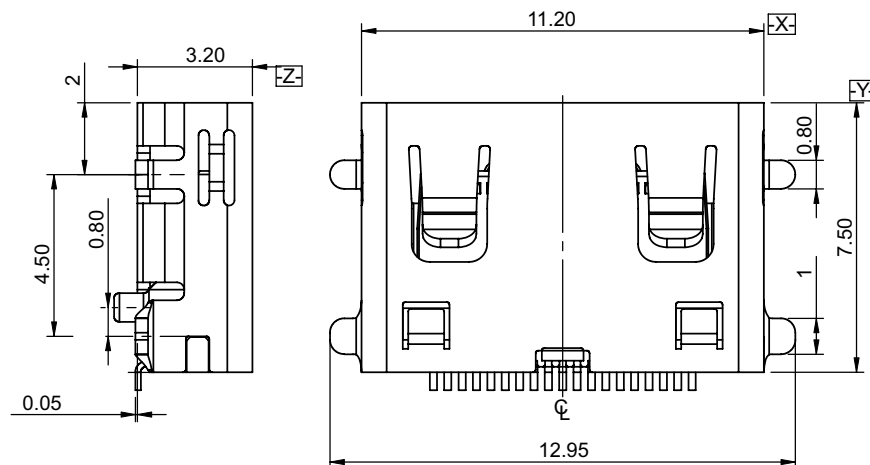

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X, ± 0.40

CHECKED BY GENIUS

X, ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

MHDMI-SWEEP-19-LF

SERIES

LEADFREE

FEMALE

19 WAY

POST

EAR+EAR


90°SMT

DESCRIPTION: HDMI TYPE C RECEPTACLE CONNECTOR(SMT)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

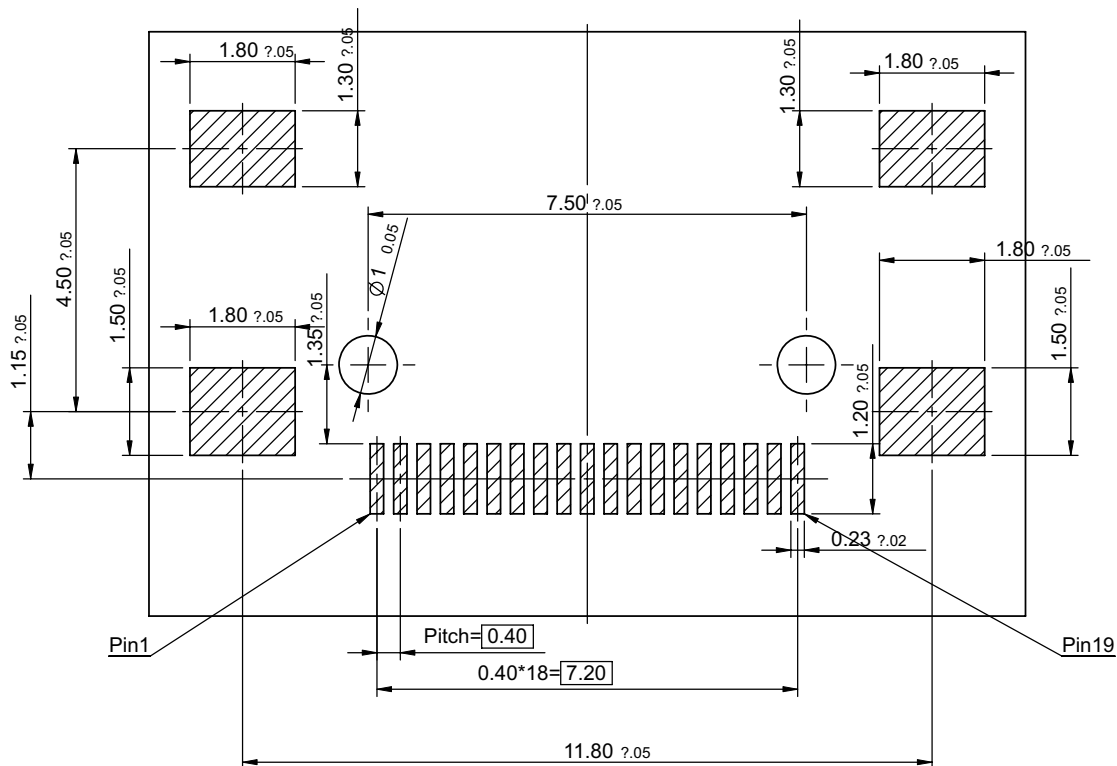

Recommend PCB Layout Tolerance = +/- 0.02mm

=PAD

HDMI Each Signal Terminal
Will Be Functional After Detected.

19	HotPlug Detect
18	5v Power
17	Utility
16	SDA
15	SCL
14	ECE
13	DDC/CEC/Ground
12	TMDS Clock-
11	TMDS Clock+
10	TMDS Clock Shield
09	TMDS Data0-
08	TMDS Data0+
07	TMDS Data0 Shield
06	TMDS Data1-
05	TMDS Data+
04	TMDS Data1 Shield
03	TMDS Data2-
02	TMDS Data2+
01	TMDS Data2 Shield
Pin NO.	Description
pin Assignment	

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MHDMI-SWEEP-19-LF

SERIES

FEMALE

LEADFREE

19 WAY

POST

EAR+EAR

90°SMT

DESCRIPTION: HDMI TYPE C RECEPTACLE CONNECTOR (SMT)