



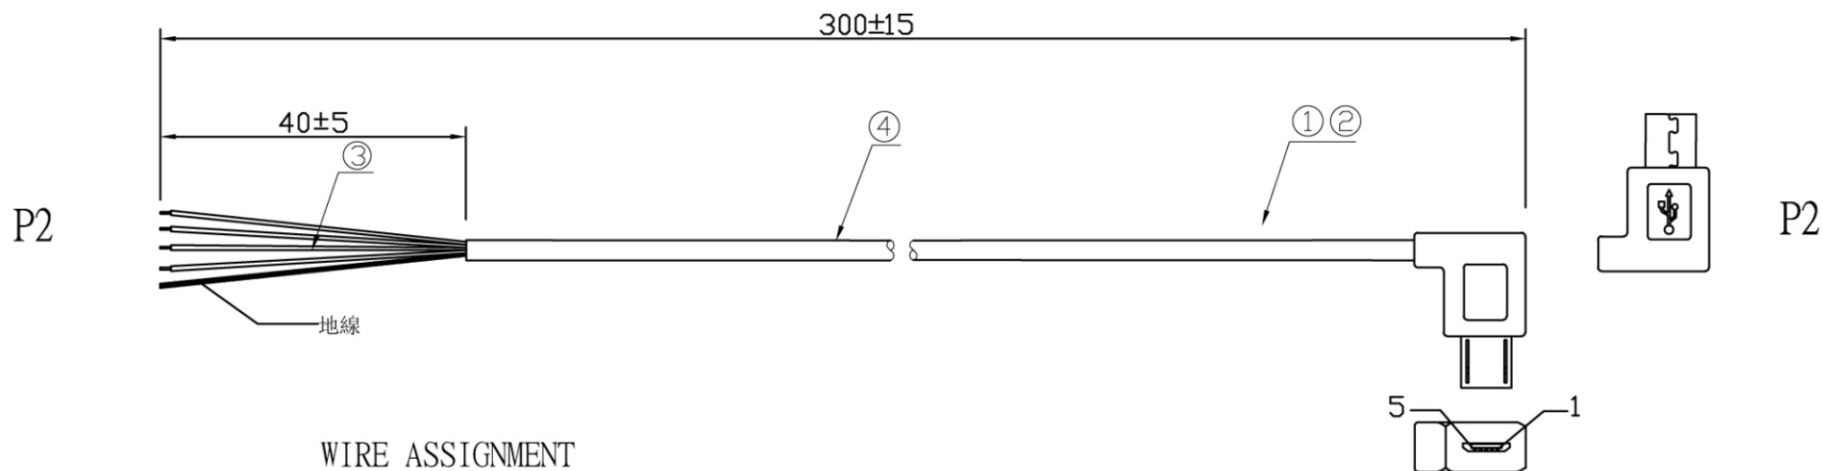

WIRE ASSIGNMENT

P1		P2
1	红	沾錫
2	白	沾錫
3	绿	沾錫
4	黑	沾錫
SHELL	地線	SHELL

包装方式:

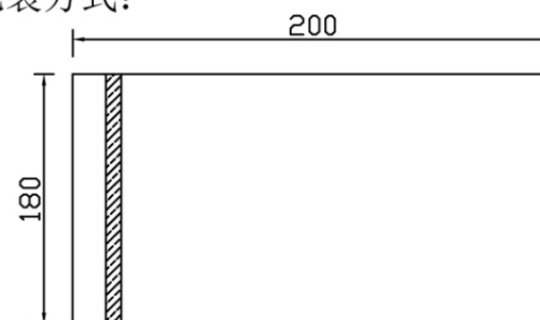

注:

1. 所有材料都需使用環保材質
2. 50条中袋包裝, 透明PE袋尺寸: 200x180mm
3. 測試參數設定: 導通阻抗50Ω 絕緣阻抗10MΩ 電壓300V

4	UL2725 28AWG*1P+28AWG*2C+AL+D+B#64 OD:3.5 COLOR:黑色外被 L:300MM	1	PCS
3	外被剝皮長度40MM, 芯線剝皮長度2MM	1	PCS
2	OUTSIDE MOLDED PVC 55P COLOR:BLACK	8	G
1	MICRO USB 5PIN MALE SOLDER TYPE 三件式 鍍鎳鐵殼 端子鍍金G/F	1	PCS
NO.	DESCRIPTION	Q'TY	UNITS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MIBX1-5BR0028-M30C-LF

SERIES

90°

28 AWG

MALE

300mm

LEADFREE

5 PIN B TYPE

DESCRIPTION: