



PART NO. 編號	PITCH 間距	MM ² 線徑	AWG WIRE SIZE	MATERIAL 材質	FINISH 表面處理	"A"	"B"	"D"	"E"	"G"	"H"	PACKING Q'TY 包裝數量	REMARK 備註
Q250-FT8-14	21.5	0.5~2.0	20~14	黃銅 Brass	鍍霧錫 MATTE TIN PLATING	5.2	5.5	3.5	3.8	19.0	3.0	5000	低腳
Q250-FT8-10	21.5	2.0~5.0	14~10		鍍霧錫 MATTE TIN PLATING	6.6	6.6	4.5	5.0	19.5	3.0	4000	高腳
Q250-FT8-18	21.5	0.3~0.8	22~18		鍍霧錫 MATTE TIN PLATING	4.5	4.4	3.4	3.1	19.0	3.2	5000	1.0高腳


NOTES:

- 1.對手件：250型 TAB=0.8
- 2.表面處理：鍍霧錫 60u" 以上
- 3.插拔力：
 - 3.1 插入力：2.5~5.0 kgf
 - 3.2 拔出力：5.0~9.0 kgf


- 1.Mating part：250-Type TAB=0.8
- 2.Finish：Matte tin plating 60u" min.
- 3.Mating/Unmating force：
 - 3.1 Mating force：2.5~5.0 Kgf.
 - 3.2 Unmating force：5.0~9.0 Kgf.

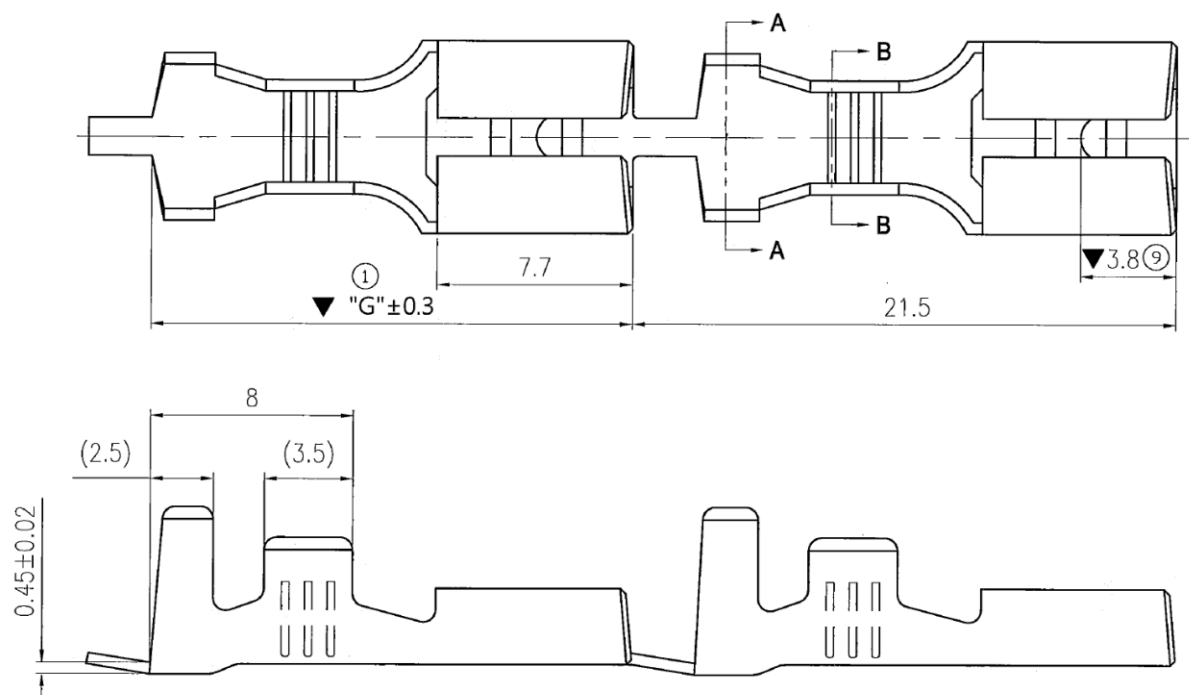

SECTION : A-A



SECTION : B-B

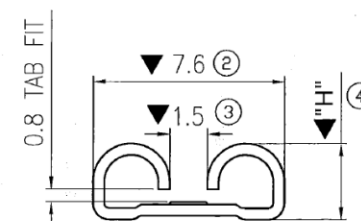

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

Q250-FT8-xx-LF

SERIES

FEMALE

LEADFREE
18:18~22 AWG
14:14~20 AWG
10:10~14 AWG
THICKNESS 0.8mm
TERMINAL

DESCRIPTION: